

DC Power Relays

G9EJ

DC Power Relays Capable of DC Loading at High Voltage and Current

- Achieves improvement of inrush-withstand performance and long-life by adopting Omron's own contact driving system.
- High capacity switching achieved through the use of a high-efficiency magnetic arc blowout circuit.
- Small and lightweight.
Size: 30 mm x 27 mm x 31 mm (H x W x L).
Weight: approx. 50 g.
- RoHS Compliant



Model Number Structure

Model Number Legend

G9EJ-□-□-□-□
1 2 3 4

1. Number of Poles
1: 1 pole

3. Coil Terminals
Blank: Tab terminal

2. Contact Form
Blank: SPST-NO

4. Special Functions

Ordering Information

List of Models

To Order: Select the part number and add the desired coil voltage rating (e.g., G9EJ-1 DC12).

Models	Terminals		Contact form	Rated coil voltage	Model
	Coil terminals	Contact terminals			
Switching type	#250 Tab	#250 Tab	SPST-NO	12 VDC	G9EJ-1

Specifications

Ratings

Contacts

Item	Resistive load
Rated load	25 A at 400 VDC
Maximum switching voltage	400 V
Maximum switching current	25 A

Coil

Rated voltage	Rated current	Coil resistance	Must-operate voltage	Must-release voltage	Maximum voltage (See note 3.)	Power consumption
12 VDC	167 mA	72 Ω	60% max. of rated voltage	5% min. of rated voltage	130% of rated voltage (at 23°C within 2 minutes)	Approx. 2 W

Note: 1. The figures for the rated current and coil resistance are for a coil temperature of 23°C and have a tolerance of ±10%.

2. The figures for the operating characteristics are for a coil temperature of 23°C.

3. The figure for the maximum voltage is the maximum voltage that can be applied to the relay coil.

■ Characteristics

Item			G9EJ-1
Contact voltage drop			0.5 V max. (for a carry current of 5 A)
Operate time			50 ms max.
Release time			30 ms max.
Insulation resistance (See note 2.)	Between coil and contacts		1,000 MΩ min.
	Between contacts of the same polarity		1,000 MΩ min.
Dielectric strength	Between coil and contacts		2,500 VAC, 1 min
	Between contacts of the same polarity		2,500 VAC, 1 min
Impulse withstand voltage (See note 3.)			4,000 V
Vibration resistance (See note 4.)	Destruction		5 to 200 to 5 Hz, Acceleration: 44.1 m/s ²
	Malfunction		5 to 200 to 5 Hz, Acceleration: 44.1 m/s ²
Shock resistance	Destruction		490 m/s ²
	Malfunction	Energized	490 m/s ²
		Deenergized	98 m/s ²
Mechanical endurance (See note 5.)			200,000 ops. min.
Electrical endurance - - condenser load (See note 6.)			400 VDC, 25 A, 100,000 ops. min.
Short-time carry current			20 A (1 min)
Maximum interruption current (resistive load)			30 A at 400 VDC (100 times min.)
Overload interruption (resistive load)			20 A at 400 VDC (300 times min.)
Ambient operating temperature			−40 to 85°C (with no icing or condensation)
Ambient operating humidity			5% to 85%
Weight (including accessories)			Approx. 50 g

Note: 1. The above values are initial values at an ambient temperature of 23°C unless otherwise specified.

2. The insulation resistance was measured with a 500-VDC megohmmeter.

3. The impulse withstand voltage was measured with a JEC-212 (1981) standard impulse voltage waveform (1.2 × 50 μs).


4. The Upper limit of double amplitude: 10 mm P-P

5. The mechanical endurance was measured at a switching frequency of 3,600 operations/hr.


6. The electrical endurance was measured at a switching frequency of 60 operations/hr.

Engineering Data

**Electrical Endurance
(Inrush Current Performance)**

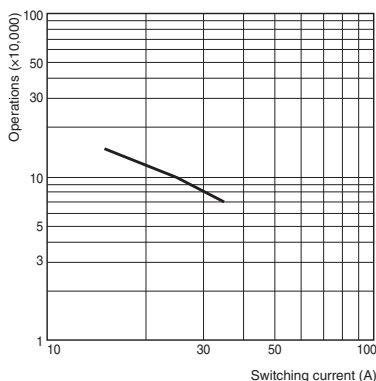


**Electrical Endurance
(Interruption Performance)**

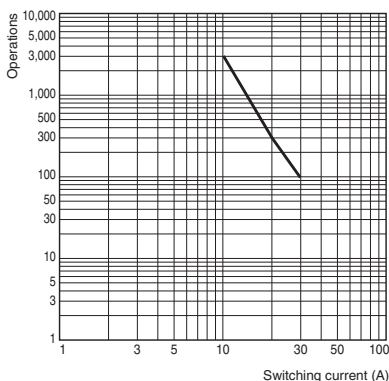


Engineering Data (continued)


Carry Current vs. Energizing Time

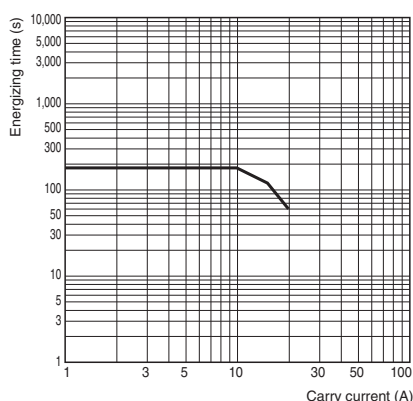


Must-operate Voltage and Must-release Voltage Distributions (Number of Relays x Percentage of Rated Voltage)

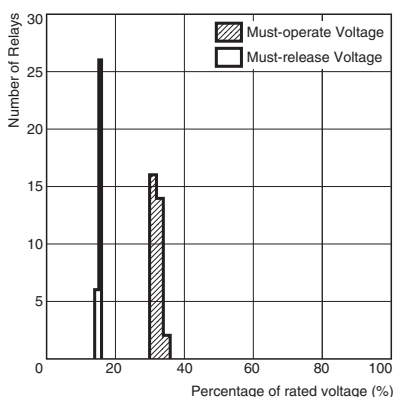


Time Characteristic Distributions (Number of Contacts x Time (ms))

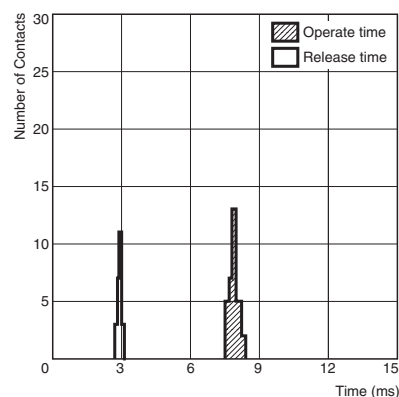

Vibration Malfunction

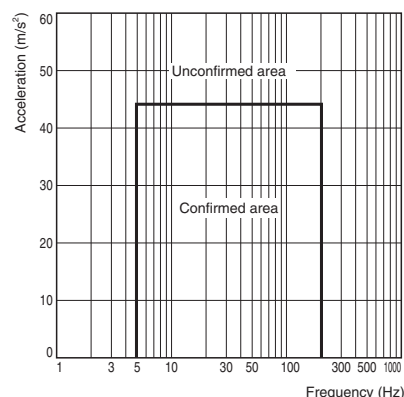


Vibration Resistance

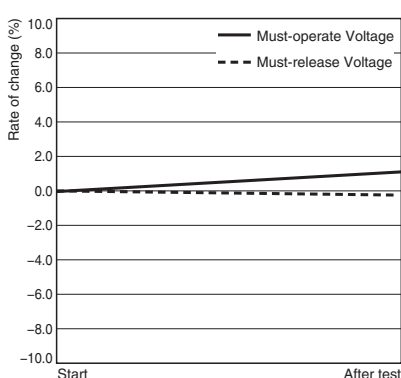


Characteristics were measured after applying vibration at a frequency of 5 to 200 to 5 Hz, acceleration of 44.1 m/s² to the test piece (not energized) for 2 hours each in 3 directions. The percentage rate of change is the average value for all of the samples.

Shock Malfunction

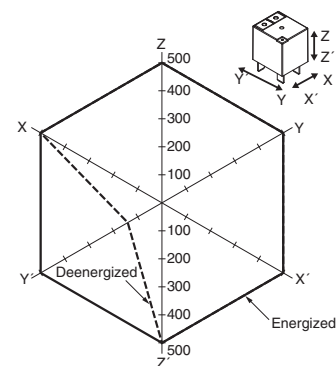

The value at which malfunction occurred was measured after applying shock to the test piece 3 times each in 6 directions along 3 axes.





Shock Resistance

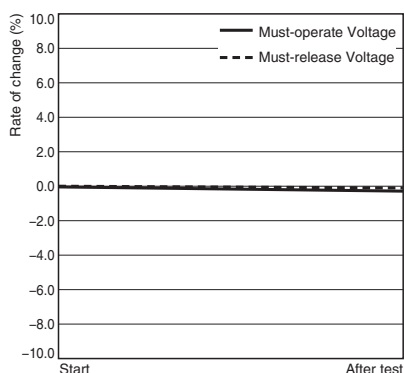


Characteristics were measured after applying a shock of 490 m/s² to the test piece 3 times each in 6 directions along 3 axes. The percentage rate of change is the average value for all of the samples.

Dimensions

G9EJ-1



Dimension (mm)	Tolerance (mm)
10 or lower	±0.3
10 to 50	±0.5



Note: All units are in millimeters unless otherwise indicated.

Precautions

⚠ WARNING

Take measures to prevent contact with charged parts when using the Relay for high voltages.



■ Correct Use

Refer to the relevant catalog for common precautions.

1. The G9EJ relay's contacts have polarity. Be sure to perform connections with the correct polarity. If the contacts are connected with the reverse polarity, the switching characteristics specified in this document cannot be assured.
2. Do not drop or disassemble this Relay. Not only may the Relay fail to meet the performance specifications, it may also result in damage, electric shock, or burning.
3. Do not use these Relays in strong magnetic fields of 800 A/m or higher (e.g., near transformers or magnets). The arc discharge that occurs during switching may be bent by the magnetic field, resulting in flashover or insulation faults.
4. This Relay is a device for switching high DC voltages. If it is used for voltages exceeding the specified range, it may not be possible to interrupt the load and burning may result. In order to prevent fire spreading, use a configuration in which the current load can be interrupted in the event of emergencies.
In order to ensure safety of the system, replace the Relay on a regular basis.
5. If the Relay is used for no-load and/or low-load switching, the contact resistance may increase and so confirm correct operation under the actual operating conditions.
6. With this Relay, if the rated voltage (or current) is continuously applied to the coil and contacts, and then turned OFF and immediately ON again, the coil temperature, and consequently the coil resistance, will be higher than usual. This means that the must-operate voltage will also be higher than usual, exceeding the rated value ("hot start"). In this case, take the appropriate countermeasures, such as reducing the load current or restricting the energizing time or ambient operating temperature.
7. The ripple percentage for DC relays can cause fluctuations in the must-operate voltage or humming. For this reason, reduce the ripple percentage in full-wave rectified power supply circuits by adding a smoothing capacitor. Ensure that the ripple percentage is less than 5%.
8. Ensure that a voltage exceeding the specified maximum voltage is not continuously applied to the coil. Abnormal heating in the coil may shorten the lifetime of the insulation coating.

9. Do not use the Relay at a switching voltage or current greater than the specified maximum values. Doing so may result in arc discharge interruption failure or burning due to abnormal heating in the contacts.
10. The contact ratings are for resistive loads. The electrical endurance with inductive loads is inferior to that of resistive loads. Confirm correct operation under the actual operating conditions.
11. Do not use the Relay in locations where water, solvents, chemicals, or oil may come in contact with the case or terminals. Doing so may result in deterioration of the case resin or abnormal heating due to corrosion or contamination of the terminals. Also, if electrolyte adheres to the output terminals, electrolysis may occur between the output terminals, resulting in corrosion of the terminals or wiring disconnections.
12. Be sure to turn OFF the power and confirm that there is no residual voltage before replacing the Relay or performing wiring.
13. The distance between crimp terminals or other conductive parts will be reduced and insulation properties will be lowered if wires are laid in the same direction from the contact terminals. Use insulating coverings, do not wire in the same direction, and take other measures as required to maintain insulation properties.
14. Use either a varistor, or a diode plus Zener diode as a protective circuit against reverse surge in the relay coil. Using a diode alone will reduce the switching characteristics.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON
**OMRON ELECTRONIC
COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173
847-882-2288

OMRON ON-LINE
Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Cat. No. J193-E-02

02/14

Specifications subject to change without notice

Printed in USA