


Holsworthy | Holsworthy Holco

TE Internal #: 1879633-3 Precision Resistor, Thin Film, .5 W, 11 Ω, .5 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco

View on TE.com >

Passive Components > Resistors > Through-Hole Resistors



Resistor Type: Precision Resistor

Element Type: Thin Film

Power Rating: .5 W

Resistance Class: Up to $1k\Omega$

Resistance Value: 11 Ω

Features

Product Type Features

Resistor Type

Element Type

E

Precision Resistor

Thin Film

1

Configuration Features

Number of Resistors

Electrical Characteristics

Operating Voltage350 VPower Rating.5 WResistance ClassUp to 1kΩResistance Value11 ΩPassive Component Tolerance.5 %Body FeaturesLead TypeAxial-LeadedTermination Area Base MaterialCopperNumber of Terminations2Dimensions10 x 3.7 mm		
Resistance ClassUp to 1kΩResistance Value11 ΩPassive Component Tolerance.5 %Body Features.5 %Lead TypeAxial-LeadedTermination FeaturesCopperTermination Area Base MaterialCopperNumber of Terminations2DimensionsCompensions	Operating Voltage	350 V
Resistance Value11 ΩPassive Component Tolerance.5 %Body Features.5 %Lead TypeAxial-LeadedTermination Features.5 %Termination Area Base MaterialCopperNumber of Terminations2Dimensions.5 %	Power Rating	.5 W
Passive Component Tolerance.5 %Body FeaturesAxial-LeadedLead TypeAxial-LeadedTermination FeaturesCopperNumber of Terminations2Dimensions	Resistance Class	Up to 1kΩ
Body Features Lead Type Axial-Leaded Termination Features Termination Area Base Material Copper Number of Terminations 2	Resistance Value	11 Ω
Lead Type Axial-Leaded Termination Features Copper Number of Terminations 2 Dimensions Comper	Passive Component Tolerance	.5 %
Termination Features Termination Area Base Material Copper Number of Terminations 2 Dimensions Copper	Body Features	
Termination Area Base MaterialCopperNumber of Terminations2DimensionsImage: Compare the second sec		
Number of Terminations 2 Dimensions 2	Lead Type	Axial-Leaded
Dimensions		Axial-Leaded
	Termination Features	
Passive Component Dimensions 10 x 3.7 mm	Termination Features Termination Area Base Material	Copper
	Termination Features Termination Area Base Material Number of Terminations	Copper

H411RDYA

Precision Resistor, Thin Film, .5 W, 11 Ω , .5 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco



Usage Conditions

Operating Temperature Range	-55 - 155 °C
Temperature Coefficient	±15 ppm/°C
Packaging Features	
Packaging Method	Bandoliered
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUN 2016 (169) SVHC > Threshold: Not Yet Reviewed

Not Yet Reviewed for halogen content

Wave solder capable to 265°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

EU REACH Regulation (EC) No. 1907/2006

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

H411RDYA

Precision Resistor, Thin Film, .5 W, 11 Ω , .5 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco








Also in the Series | Holsworthy Holco




Customers Also Bought

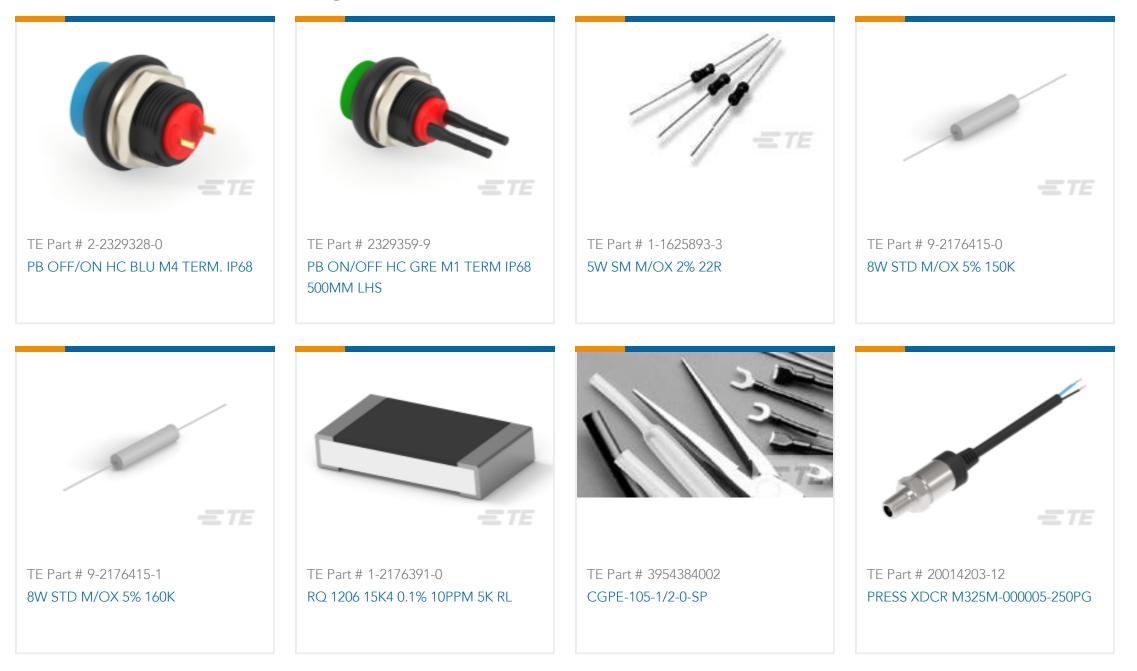

H411RDYA

Precision Resistor, Thin Film, .5 W, 11 Ω, .5 %, ±15 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco



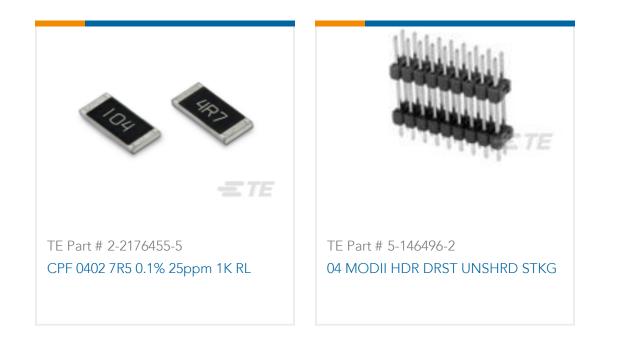

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1879633-3_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1879633-3_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1879633-3_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

1309350_PASSIVE_COMPONENT

English

Axial Leaded Precision Resistors - Type HOLCO Series

English

8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS_FOR_ELEVATORS_AND_ESCALATORS

English