
H415KBDA 🗸 ACTIVE

Holsworthy | Holsworthy Holco

TE Internal #: 1879670-9 Precision Resistor, Thin Film, .5 W, 15K Ω, .1 %, ±25 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco

View on TE.com >

Passive Components > Resistors > Through-Hole Resistors

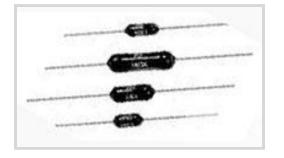

Resistor Type: Precision Resistor

Element Type: Thin Film

Power Rating: .5 W

Resistance Class: $1k\Omega - 1M\Omega$

Resistance Value: $15K \Omega$

Features

Product Type Features

Resistor Type

Element Type

E

Precision Resistor

Thin Film

1

Configuration Features

Number of Resistors

Electrical Characteristics

Lead Type Axial-Leaded		
Resistance Class1kΩ - 1MΩResistance Value15K ΩPassive Component Tolerance.1 %Body Features.1 %Lead TypeAxial-LeadedTermination FeaturesCopperTermination Area Base MaterialCopperNumber of Terminations2Dimensions	Operating Voltage	350 V
Resistance Value15K ΩPassive Component Tolerance.1 %Body FeaturesAxial-LeadedLead TypeAxial-LeadedTermination FeaturesCopperNumber of Terminations2Dimensions	Power Rating	.5 W
Passive Component Tolerance.1 %Body FeaturesAxial-LeadedLead TypeAxial-LeadedTermination FeaturesCopperNumber of Terminations2Dimensions	Resistance Class	1kΩ - 1MΩ
Body Features Lead Type Axial-Leaded Termination Features Copper Number of Terminations 2 Dimensions Comper	Resistance Value	15Κ Ω
Lead Type Axial-Leaded Termination Features Copper Number of Terminations 2 Dimensions	Passive Component Tolerance	.1 %
Termination Features Termination Area Base Material Copper Number of Terminations 2 Dimensions Copper	Body Features	
Termination Area Base MaterialCopperNumber of Terminations2Dimensions	Lead Type	Axial-Leaded
Number of Terminations 2 Dimensions 2	Termination Features	
Dimensions	Termination Area Base Material	Copper
	Number of Terminations	2
Passive Component Dimensions 10 x 3.7 mm	Dimonsions	
	Dimensions	

H415KBDA

Precision Resistor, Thin Film, .5 W, 15K Ω , .1 %, ±25 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco



Usage Conditions

Temperature Coefficient

Packaging Features

Packaging Method

-55 - 155 °C

±25 ppm/°C

Bandoliered

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUN 2016 (169) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Wave solder capable to 265°C

Free

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts

H415KBDA

Precision Resistor, Thin Film, .5 W, 15K Ω , .1 %, ±25 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco






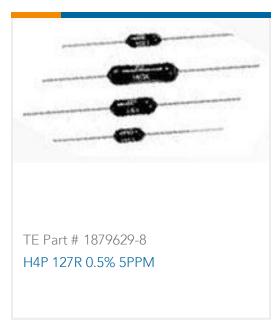

Also in the Series | Holsworthy Holco



Customers Also Bought

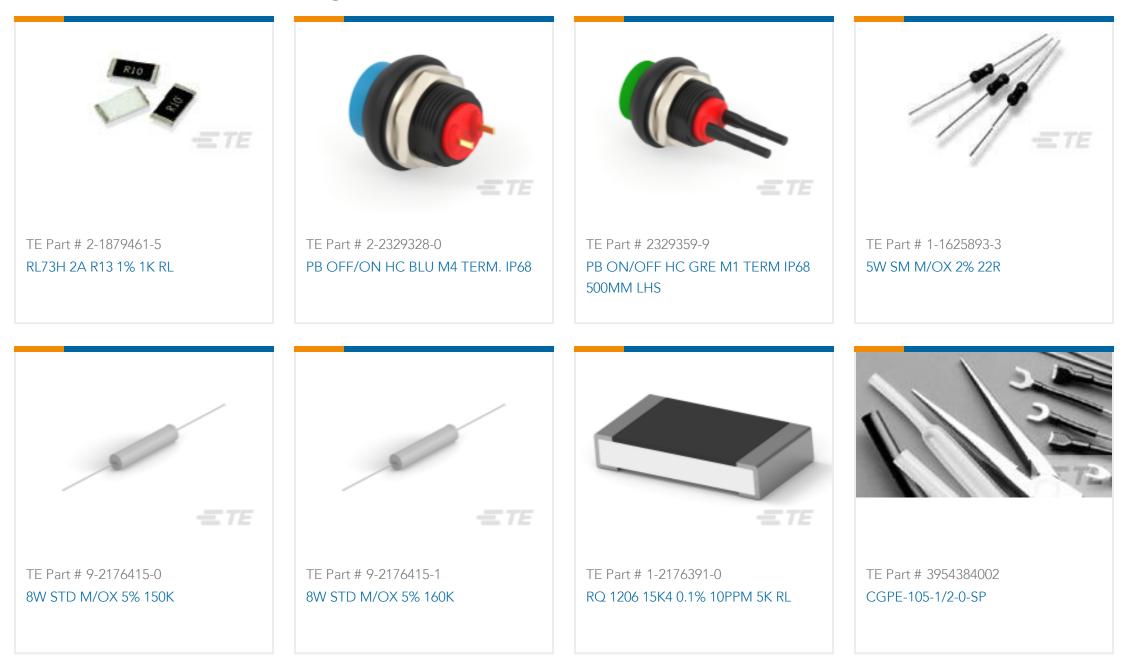

H415KBDA

Precision Resistor, Thin Film, .5 W, 15K Ω, .1 %, ±25 ppm/°C, Axial-Leaded, Copper Termination, 10 x 3.7 mm, Bandoliered, Holsworthy Holco





Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1879670-9_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1879670-9_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1879670-9_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

1309350_PASSIVE_COMPONENT

English

Axial Leaded Precision Resistors - Type HOLCO Series

English

8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS_FOR_ELEVATORS_AND_ESCALATORS

English