





# BATTERY INSULATORS (PULL TABS)

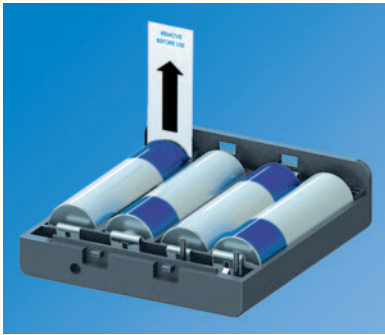

- Battery insulator will protect battery and circuitry during shipping and storage
- Insulator to be pulled out from product when it is time to activate


- Lettering and arrow provide intuitive markings for proper use
- Thin, flexible, strong insulator can be pulled from battery compartment even if the battery compartment is closed

### "AA" & LARGER

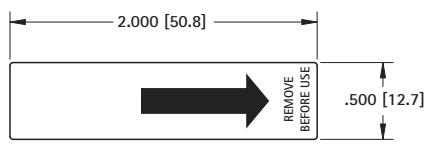


**MATERIAL:** .007 Mineral Reinforced Polypropylene, white  
**CAT. NO. 117** 1000 pieces per roll


### BUTTON CELL & "AAA"



**MATERIAL:** .007 Mineral Reinforced Polypropylene, white  
**CAT. NO. 111** 1000 pieces per roll

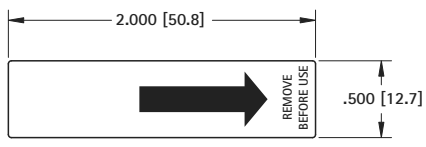

**MATERIAL:** .005 Polyester, clear  
**CAT. NO. 121** (Bulk)

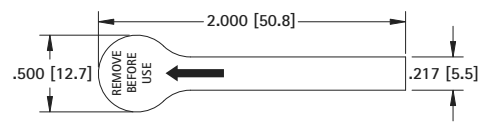


**MATERIAL:** .005 Polyester, clear  
**CAT. NO. 119** (Bulk)

## POLARITY INDICATING LABEL




- No gluing or wetting needed
- Pressure sensitive adhesive back
- Economical
- Adheres to all surfaces



**CAT. NO. 58**


## INSULATED POLARIZING WASHERS

- Prevents improper connection of battery which may cause damage to electronic equipment
- Washers hold securely when snapped over eyelets
- Used on our standardized battery holders
- For "AA", "C" & "D" cells.

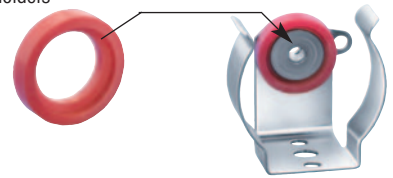


**MATERIAL:** Molded Polyethylene  
**CAT. NO. 59** (RED)  
**CAT. NO. 60** (BLACK)


## COIN CELL ENCLOSURE CONTACT LAYOUTS

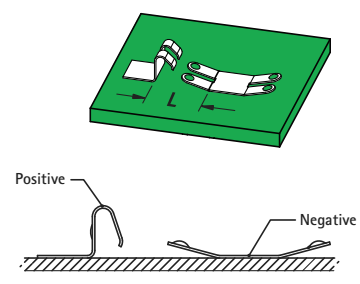


Refer to page 12 for Part Details

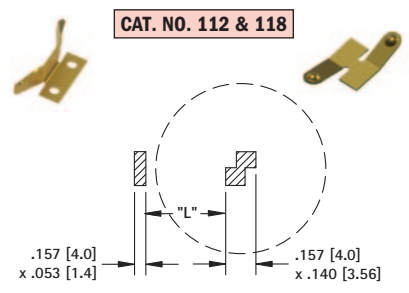


CAT. NO.	BATTERY REFERENCE	L
120 & 118	CR1216, CR1220	.178 (4.5)
	CR1612, CR1616, CR1620	.256 (635)

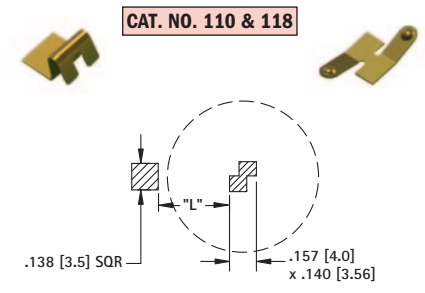


CAT. NO.	BATTERY REFERENCE	L
110 & 118	CR1225	.213 (5.4)
	CR1632	.291 (7.4)

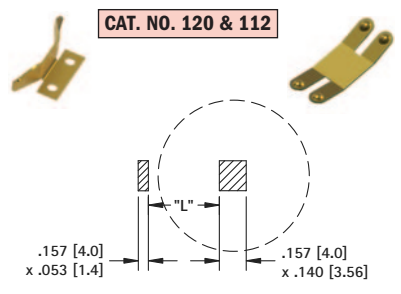

CAT. NO.	BATTERY REFERENCE	L
120 & 112	CR2012, CR2016, CR2020	.336 (8.5)
	CR2320	.395 (10.0)
	CR2412	.414 (10.5)

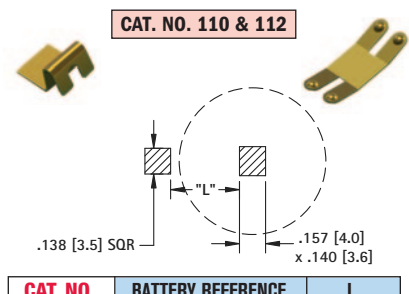

CAT. NO.	BATTERY REFERENCE	L
110 & 112	CR2025, CR2032	.370 (9.4)
	CR2325, CR2330	.429 (10.9)
	CR2430	.448 (11.4)
	CR2032	.567 (14.4)

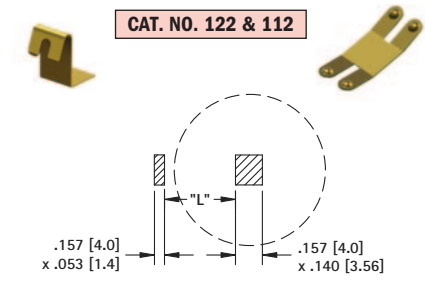

CAT. NO.	BATTERY REFERENCE	L
122 & 112	CR2354	.429 (10.9)
	CR2450, CR2477	.448 (11.4)
	CR3032	.567 (14.4)