

PCB Snap-In Capacitors

ALC10/40 series

Listed here are only samples of the range of PCB mounting Snap-In Capacitors we can produce.

Electrical characteristics and case size are just two parameters that can be optimised by our design engineers to achieve the exact product you require. Please contact our sales office for more details.



ALC10 Series

The ALC10 series of snap-in capacitors cover a wide range of case sizes and voltage ratings featuring high ripple currents and long life performance. They are ideally suited for industrial and commercial applications demanding high reliability and long life expectancy such as frequency converters, UPS systems and switch mode power supplies.

ALC40 Series

The ALC40 series of snap-in capacitors feature the same high ripple currents and long life characteristics as the ALC10 series but can operate at higher temperatures. They are similarly suited for high reliability and long life applications such as frequency converters, UPS systems and switch mode power supplies, but the extended temperature range allows increased ripple currents at lower temperatures.

ALC12/42


The ALC12 (85°C) and ALC42 (105°C) are high CV, snap-in, versions of the ALC10 and ALC40 ranges. Both series are designed for applications where high reliability and compact sizes are important such as switch mode power supplies and frequency converters. An overview of both series can be found on pages 43 to 46.

	ALC10	ALC40
Capacitance Range	39µF to 220,000µF	33µF to 220,000µF
Capacitance Tolerance	±20%	±20%
Voltage Range	10V to 500V d.c.	10V to 450V d.c.
Temperature range	-40°C to +85°C	-40°C to +105°C
Case sizes	22 x 30mm to 50 x 105mm	22 x 30mm to 50 x 105mm


PCB Snap-In Capacitors

ALC10/40 case sizes


STYLE A/D
2 Pin

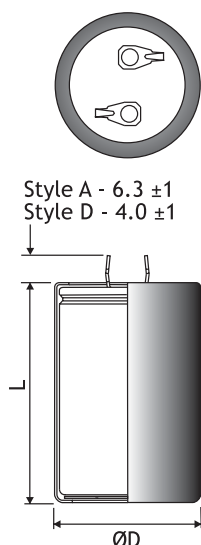




STYLE F
3 Pin

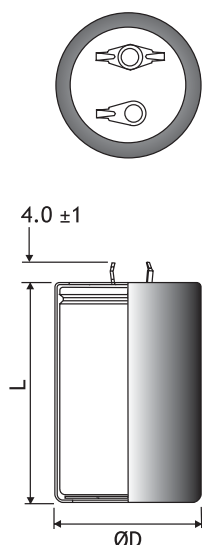



STYLE C/E
4 Pin

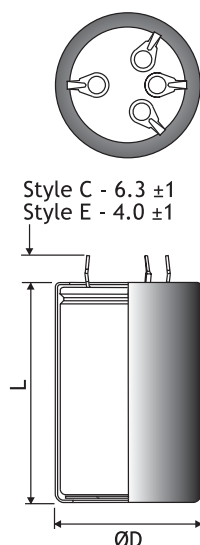

STYLE G/H
5 Pin

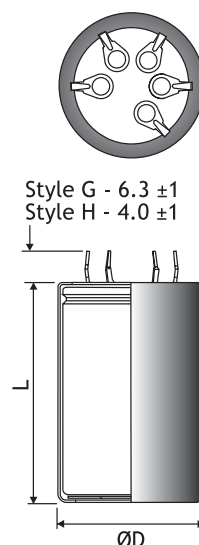

Negative denoted by line on sleeve



Mounting

These capacitors are designed to be mounted by their terminations alone, and may be used in any position. Dummy pins must be isolated on 4 and 5 pin styles.

CASE CODE (COMPONENT WEIGHT grams - nom.)

DIA. mm	LENGTH mm ±2									
-0+1	30	35	40	45	50	55	60	80	105	
22	AB (25)	AC (26)	AD (30)							
25	BB (28)	BC (30)	BD (35)							
30	CB (35)	CC (40)	CD (45)	CE (50)	CF (55)					
35	DB (42)	DC (50)	DD (55)	DE (65)	DF (70)	DG (75)	DH (80)	DL (105)		
40	EB (49)	EC (57)	ED (65)	EE (80)	EF (82)	EG (95)	EH (98)	EL (131)	EP (170)	
45	FB (62)	FC (72)	FD (82)	FE (92)	FF (103)	FG (113)	FH (123)	FL (164)	FP (215)	
50	KB (75)	KC (88)	KD (100)	KE (113)	KF (126)	KG (138)	KH (151)	KL (201)	KP (264)	

Other sizes available upon request

TERMINAL STYLE

DESCRIPTION	2 pin standard	2 pin short	3 pin short	4 pin standard	4 pin short	5 pin standard	5 pin short
PIN LENGTH	6.3±1	4.0±1	4.0±1	6.3±1	4.0±1	6.3±1	4.0±1
CODE	A	D	F	C	E	G	H
DIA. mm -0+1							
22	●						
25	●		●	●			
30	●	●	●				
35	●	●	●	●	●		
40	●	●		●	●	●	●
45				●	●	●	●
50				●	●	●	●

TECHNICAL DATA

Related documents

IEC 384-4

Temperature range

ALC10: Storage -55°C to +85°C
Operating -40°C to +85°C
Environmental classification 40/085/56

ALC40: Storage -55°C to +105°C
Operating -40°C to +105°C
Environmental classification 40/105/56

Surge voltage

1000 surges (30 seconds) at 85°C (ALC10) and 105°C (ALC40) with surge voltage applied. See electrical characteristics for more details.

Charge/discharge

10⁶ cycles at 25°C and rated voltage. One cycle per second with a time constant of 0.1.

D.C. leakage current

After application of rated d.c. voltage for 5 minutes at 20°C, the d.c. leakage current shall not exceed (0.006 C_r U_r) µA. Where C_r is the rated capacitance in µF and U_r is the rated d.c. voltage.

Vibration

10Hz to 500Hz at 0.75mm or 10g for 3x2hrs duration.
10Hz to 55Hz at 0.35mm or 5g for 3x0.5hrs duration (45/50mm diameter cans).

Insulation resistance

≥ 100MΩ at 100V d.c., across insulating sleeve.

Voltage proof

≥ 2500V d.c., across insulating sleeve.

Ripple current

The following values are approximate only, to give an indication of the effects of frequency and temperature on ripple current. More accurate data can be obtained by referring to the Application Notes available from BHC.

FREQUENCY CORRECTION - ALC10/40

Capacitors shall withstand the rated r.m.s. ripple current as given in the tables at upper category temperature in circulating air. For frequencies other than those shown the following formula should be used:

$$\text{Ripple current} = \sqrt{\frac{F \times A^2 \times B^2}{100 \times (B^2 - A^2) + (F \times A^2)}}$$

A = 100Hz ripple current

B = 10kHz ripple current

F = Required frequency (Hz)

TEMPERATURE CORRECTION - ALC10

For ambient temperatures other than 85°C the following correction factors should be employed.

AMBIENT TEMPERATURE	FACTOR
30°C	2.5
50°C	2.1
70°C	1.6
85°C	1.0

TEMPERATURE CORRECTION - ALC40

For ambient temperatures other than 105°C the following correction factors should be employed.

AMBIENT TEMPERATURE	FACTOR
50°C	2.5
60°C	2.4
70°C	2.2
85°C	1.8
105°C	1.0

N.B. The sum of the d.c. and a.c. voltage components should not exceed the d.c. voltage rating.

Life expectancy

At rated temperature with rated voltage and ripple current applied.

CAN DIAMETER (mm)	RANGE	LIFE EXPECTANCY (hours)
22	ALC10	8000
22	ALC40	4000
25	ALC10	10000
25	ALC40	6000
30	ALC10	13000
30	ALC40	7000
35	ALC10	15000
35	ALC40	8000
40, 45, 50	ALC10	18000
40, 45, 50	ALC40	9000

Capacitor marking

The capacitors are marked with items 1 to 6 from the following list as a minimum, and as much of the remaining information as is practical.

1. Rated capacitance in µF
2. Rated voltage d.c.
3. Polarity of terminations
4. Tolerance on rated capacitance
5. Date code/Batch number
6. BHC part number
7. Environmental classification

PCB Snap-In Capacitors

ALC10

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 85 °C		Type number
					100 Hz	10 KHz	
10V d.c. (11.5V surge)	8200	22x30	151	136	1.95	2.02	ALC10A822AB010
	12000	25x30	119	107	2.39	2.48	ALC10A123BB010
	12000	22x40	103	93	2.63	2.72	ALC10A123AD010
	15000	25x35	94	85	2.84	2.94	ALC10A153BC010
	18000	30x30	102	92	2.91	3.01	ALC10A183CB010
	18000	25x40	80	72	3.23	3.34	ALC10A183BD010
	22000	30x35	80	72	3.46	3.58	ALC10A223CC010
	27000	30x40	69	62	3.91	4.05	ALC10A273CD010
	33000	35x35	74	67	3.98	4.12	ALC10A333DC010
	39000	30x50	52	47	4.89	5.06	ALC10A393CF010
	39000	35x40	64	58	4.48	4.64	ALC10A393DD010
	47000	35x50	49	44	5.55	5.75	ALC10A473DF010
	56000	40x30	65	59	4.91	5.08	ALC10A563EB010
	68000	40x40	52	47	6.78	7.02	ALC10A683ED010
	82000	40x45	43	39	7.72	7.99	ALC10A823EE010
	100000	40x50	36	32	8.79	9.10	ALC10A104EF010
	120000	40x55	32	29	9.11	9.43	ALC10A124EG010
	150000	40x60	27	24	10.04	10.40	ALC10A154EH010
	180000	40x80	20	18	13.14	13.61	ALC10A184EL010
	220000	40x105	17	16	13.64	14.05	ALC10A224EP010
16V d.c. (18.5V surge)	6800	22x30	139	122	2.03	2.11	ALC10A682AB016
	8200	25x30	128	113	2.30	2.40	ALC10A822BB016
	10000	22x40	94	83	2.76	2.87	ALC10A103AD016
	10000	25x35	101	89	2.74	2.85	ALC10A103BC016
	12000	30x30	115	101	2.74	2.85	ALC10A123CB016
	12000	25x40	87	77	3.10	3.23	ALC10A123BD016
	18000	30x35	87	77	3.32	3.46	ALC10A183CC016
	22000	30x40	75	66	3.75	3.91	ALC10A223CD016
	22000	35x35	86	76	3.69	3.84	ALC10A223DC016
	27000	30x50	59	52	4.59	4.78	ALC10A273CF016
	27000	35x40	74	65	4.17	4.34	ALC10A273DD016
	33000	40x30	76	68	5.06	5.17	ALC10A333EB016
	39000	35x50	55	48	5.23	5.45	ALC10A393DF016
	39000	40x35	66	60	5.63	5.74	ALC10A393EC016
	47000	40x40	53	48	6.68	6.83	ALC10A473ED016
	56000	40x45	44	40	7.67	7.84	ALC10A563EE016
	68000	40x50	37	33	8.74	8.93	ALC10A683EF016
	82000	40x55	33	29	9.05	9.22	ALC10A823EG016
	100000	40x60	27	25	10.05	10.23	ALC10A104EH016
	120000	40x80	20	18	13.13	13.43	ALC10A124EL016
	220000	40x105	17	16	13.64	14.05	ALC10A224EP016
25V d.c. (28.5V surge)	4700	22x30	139	118	2.03	2.14	ALC10A472AB025
	5600	25x30	129	110	2.29	2.41	ALC10A562BB025
	6800	22x40	95	81	2.74	2.89	ALC10A682AD025
	8200	25x35	95	81	2.82	2.97	ALC10A822BC025
	10000	30x30	113	96	2.76	2.91	ALC10A103CB025
	10000	25x40	81	69	3.21	3.38	ALC10A103BD025
	12000	30x35	88	75	3.30	3.48	ALC10A123CC025
	15000	30x40	75	64	3.75	3.95	ALC10A153CD025
	18000	35x35	85	72	3.71	3.91	ALC10A183DC025
	18000	30x50	59	50	4.59	4.84	ALC10A183CF025
	22000	35x40	74	63	4.17	4.40	ALC10A223DD025
	27000	35x50	55	47	5.23	5.51	ALC10A273DF025
	27000	40x30	84	76	4.10	4.15	ALC10A273EB025
	39000	40x40	59	54	5.65	5.73	ALC10A393ED025
	47000	40x45	49	44	6.44	6.53	ALC10A473EE025
	56000	40x50	40	37	7.42	7.52	ALC10A563EF025
	68000	40x55	37	34	7.56	7.64	ALC10A683EG025
	100000	40x80	22	20	11.20	11.36	ALC10A104EL025
	120000	40x105	18	17	12.96	13.53	ALC10A124EP025

Ordering information

For details of ordering see pages 54 & 55.

ALC10

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 85 °C		Type number
					100 Hz	10 KHz	
35V d.c. (40V surge)	3300	22x30	145	120	2.00	2.14	ALC10A332AB035
	4700	25x30	127	107	2.31	2.47	ALC10A472BB035
	5600	22x40	98	82	2.70	2.88	ALC10A562AD035
	6800	25x35	97	81	2.80	2.99	ALC10A682BC035
	8200	30x30	114	95	2.75	2.94	ALC10A822CB035
	8200	25x40	83	70	3.17	3.39	ALC10A822BD035
	10000	30x35	89	75	3.28	3.50	ALC10A103CC035
	12000	30x40	76	64	3.73	3.99	ALC10A123CD035
	15000	35x35	86	72	3.70	3.95	ALC10A153DC035
	15000	30x50	59	49	4.59	4.90	ALC10A153CF035
	15000	40x30	87	78	4.24	4.31	ALC10A153EB035
	18000	35x40	75	63	4.16	4.44	ALC10A183DD035
	18000	40x35	77	70	4.66	4.73	ALC10A183EC035
	22000	35x50	55	46	5.23	5.59	ALC10A223DF035
	22000	40x40	61	55	5.56	5.65	ALC10A223ED035
	27000	40x45	51	46	6.30	6.40	ALC10A273EE035
	33000	40x50	42	38	7.16	7.27	ALC10A333EF035
	39000	40x60	33	30	8.75	8.91	ALC10A393EH035
	56000	40x80	23	21	10.94	11.14	ALC10A563EL035
	100000	40x105	17	16	12.67	13.34	ALC10A104EP035
40V d.c. (46V surge)	2700	22x30	148	121	1.97	2.14	ALC10A272AB040
	3900	25x30	125	103	2.33	2.53	ALC10A392BB040
	3900	22x40	101	83	2.66	2.89	ALC10A392AD040
	4700	25x35	99	81	2.77	3.01	ALC10A472BC040
	5600	30x30	115	94	2.74	2.98	ALC10A562CB040
	5600	25x40	85	70	3.14	3.42	ALC10A562BD040
	6800	30x35	90	74	3.26	3.55	ALC10A682CC040
	8200	30x40	77	63	3.70	4.03	ALC10A822CD040
	10000	35x35	86	71	3.69	4.01	ALC10A103DC040
	12000	30x50	59	48	4.59	4.99	ALC10A123CF040
	12000	35x40	75	62	4.14	4.50	ALC10A123DD040
	15000	40x30	89	79	4.42	4.51	ALC10A153EB040
	18000	35x50	55	45	5.23	5.69	ALC10A183DF040
	18000	40x35	78	70	4.88	4.97	ALC10A183EC040
	22000	40x40	62	56	5.81	5.92	ALC10A223ED040
	27000	40x50	43	38	7.23	7.36	ALC10A273EF040
	33000	40x60	33	30	8.74	8.91	ALC10A333EH040
	47000	40x80	23	21	10.96	11.17	ALC10A473EL040
	82000	40x105	18	17	12.63	13.44	ALC10A823EP040
50V d.c. (57V surge)	1800	22x30	175	140	1.85	2.07	ALC10A182AB050
	2700	25x30	137	110	2.23	2.49	ALC10A272BB050
	2700	22x40	125	100	2.43	2.72	ALC10A272AD050
	3300	25x35	114	91	2.60	2.91	ALC10A332BC050
	3900	30x30	113	91	2.75	3.07	ALC10A392CB050
	3900	25x40	99	80	2.94	3.29	ALC10A392BD050
	5600	30x35	91	73	3.25	3.63	ALC10A562CC050
	6800	30x40	80	65	3.63	4.06	ALC10A682CD050
	8200	35x35	81	65	3.82	4.27	ALC10A822DC050
	8200	30x50	68	54	4.33	4.84	ALC10A822CF050
	10000	35x40	73	59	4.23	4.73	ALC10A103DD050
	10000	40x30	81	72	4.15	4.24	ALC10A103EB050
	12000	35x50	60	48	5.05	5.65	ALC10A123DF050
	12000	40x40	65	57	5.75	5.89	ALC10A123ED050
	15000	40x45	53	47	6.48	6.64	ALC10A153EE050
	18000	40x50	44	39	7.41	7.59	ALC10A183EF050
	22000	40x55	40	36	7.60	7.75	ALC10A223EG050
	27000	40x60	33	30	8.41	8.56	ALC10A273EH050
	39000	40x80	23	21	10.49	10.68	ALC10A393EL050
	68000	40x105	18	16	12.42	13.30	ALC10A683EP050

Ordering information

For details of ordering see pages 54 & 55.

PCB Snap-In Capacitors

ALC10

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 85 °C		Type number
					100 Hz	10 KHz	
63V d.c. (72.5V surge)	1500	22x30	199	157	1.70	1.89	ALC10A152AB063
	2200	25x30	149	118	2.13	2.37	ALC10A222BB063
	2200	22x40	149	118	2.19	2.44	ALC10A222AD063
	2700	25x35	128	101	2.43	2.70	ALC10A272BC063
	3300	30x30	112	88	2.77	3.08	ALC10A332CB063
	3300	25x40	112	88	2.73	3.04	ALC10A332BD063
	4700	30x35	91	72	3.24	3.61	ALC10A472CC063
	5600	30x40	83	66	3.56	3.96	ALC10A562CD063
	6800	35x35	75	59	3.95	4.40	ALC10A682DC063
	6800	30x50	75	59	4.07	4.53	ALC10A682CF063
	8200	35x40	69	55	4.31	4.80	ALC10A822DD063
	8200	40x30	82	72	3.95	4.03	ALC10A822EB063
	10000	35x50	64	51	4.85	5.40	ALC10A103DF063
	10000	40x35	80	72	4.58	4.67	ALC10A103EC063
	12000	40x40	64	57	5.42	5.55	ALC10A123ED063
	15000	40x50	44	39	7.02	7.18	ALC10A153EF063
	18000	40x60	35	31	8.54	8.75	ALC10A183EH063
	27000	40x80	24	21	10.53	10.78	ALC10A273EL063
	39000	40x105	19	17	12.23	13.51	ALC10A393EP063
100V d.c. (115V surge)	680	22x30	355	266	1.27	1.55	ALC10A681AB100
	1000	25x30	243	182	1.67	2.04	ALC10A102BB100
	1200	22x40	203	152	1.88	2.30	ALC10A122AD100
	1200	25x35	203	152	1.93	2.36	ALC10A122BC100
	1500	30x40	163	122	2.30	2.81	ALC10A152CB100
	1500	25x40	163	122	2.27	2.78	ALC10A152BD100
	1800	30x35	137	103	2.64	3.23	ALC10A182CC100
	2200	30x40	113	85	3.05	3.73	ALC10A222CD100
	2700	35x35	92	69	3.57	4.37	ALC10A272DC100
	2700	40x30	121	104	3.72	3.88	ALC10A272EB100
	3300	30x50	76	57	4.05	4.95	ALC10A332CF100
	3300	35x40	76	57	4.11	5.03	ALC10A332DD100
	3300	40x35	106	92	4.09	4.24	ALC10A332EC100
	3900	40x40	85	74	4.88	5.08	ALC10A392ED100
	4700	35x50	55	41	5.23	6.40	ALC10A472DF100
	4700	40x45	70	61	5.60	5.83	ALC10A472EE100
	5600	40x50	59	51	6.41	6.68	ALC10A562EF100
	6800	40x55	53	46	6.61	6.84	ALC10A682EG100
	8200	40x60	44	39	7.36	7.61	ALC10A822EH100
	12000	40x80	31	27	9.14	9.45	ALC10A123EL100
	18000	40x105	19	17	11.34	12.61	ALC10A183EP100
200V d.c. (230V surge)	220	22x30	727	509	0.89	1.23	ALC10A221AB200
	330	25x30	486	340	1.18	1.63	ALC10A331BB200
	330	22x40	486	340	1.21	1.67	ALC10A331AD200
	390	25x35	412	288	1.36	1.87	ALC10A391BC200
	470	30x30	343	240	1.58	2.18	ALC10A471CB200
	470	25x40	343	240	1.56	2.15	ALC10A471BD200
	560	30x35	288	202	1.82	2.51	ALC10A561CC200
	680	30x40	238	167	2.10	2.89	ALC10A681CD200
	820	35x35	198	139	2.43	3.35	ALC10A821DC200
	820	40x30	178	142	3.06	3.63	ALC10A821EB200
	1000	30x50	163	114	2.76	3.80	ALC10A102CF200
	1000	35x40	163	114	2.81	3.87	ALC10A102DD200
	1000	40x35	153	124	3.43	3.99	ALC10A102EC200
	1200	35x50	135	82	3.06	4.01	ALC10A122DF200
	1200	40x40	124	99	4.02	4.69	ALC10A122ED200
	1500	35x50	110	77	3.70	5.10	ALC10A152DF200
	1500	40x45	101	81	4.61	5.38	ALC10A152EE200
	1800	40x50	84	68	5.27	6.15	ALC10A182EF200
	2200	40x60	67	53	6.29	7.43	ALC10A222EH200
	3300	40x80	46	37	7.83	9.17	ALC10A332EL200
	4700	40x105	45	32	8.08	11.73	ALC10A472EP200
	5600	45x105	42	29	8.51	12.16	ALC10G562FP200
	8200	50x105	33	25	9.17	11.76	ALC10G822KP200

Ordering information

For details of ordering see pages 54 & 55.

ALC10

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 85 °C		Type number
250V d.c. (287V surge)	180	22x30	888	577	0.80	1.17	ALC10A181AB250
	220	25x30	727	473	0.97	1.41	ALC10A221BB250
	270	22x40	593	385	1.10	1.60	ALC10A271AD250
	270	25x35	593	385	1.13	1.65	ALC10A271BC250
	330	30x30	486	316	1.33	1.94	ALC10A331CB250
	330	25x35	490	320	1.34	1.95	ALC10A331BC250
	330	25x40	486	316	1.31	1.91	ALC10A331BD250
	470	30x35	343	223	1.67	2.43	ALC10A471CC250
	560	30x40	288	187	1.91	2.78	ALC10A561CD250
	680	35x35	238	155	2.22	3.23	ALC10A681DC250
	680	30x50	238	155	2.29	3.34	ALC10A681CF250
	680	40x30	187	144	2.79	3.56	ALC10A681EB250
	820	35x40	198	129	2.55	3.72	ALC10A821DD250
	820	40x40	153	116	3.80	4.91	ALC10A821ED250
	1000	35x50	163	106	3.26	4.75	ALC10A102DF250
	1000	40x45	126	96	4.33	5.58	ALC10A102EE250
	1200	35x60	140	100	3.76	5.48	ALC10A122DH250
	1200	40x50	104	80	4.94	6.37	ALC10A122EF250
	1500	40x55	89	69	5.29	6.58	ALC10A152EG250
	1800	35x80	100	82	4.60	6.69	ALC10A182DL250
	1800	40x60	74	58	5.92	7.34	ALC10A182EH250
	2200	40x80	57	43	7.33	9.49	ALC10A222EL250
	3900	40x105	46	32	7.78	11.71	ALC10A392EP250
	4700	45x105	42	29	8.22	12.11	ALC10G472FP250
	5600	50x105	38	27	8.63	12.03	ALC10G562KP250
350V d.c. (385V surge)	100	22x30	1359	876	0.69	1.49	ALC10A101AB350
	120	25x30	1139	736	0.83	1.75	ALC10A121BB350
	150	22x40	908	585	0.95	2.03	ALC10A151AD350
	150	25x35	912	589	0.99	2.07	ALC10A151BC350
	180	25x40	761	492	1.13	2.37	ALC10A181BD350
	180	30x30	776	506	1.11	2.19	ALC10A181CB350
	270	30x35	527	346	1.41	2.65	ALC10A271CC350
	330	30x40	432	284	1.65	3.07	ALC10A331CD350
	330	40x30	424	277	2.02	3.97	ALC10A331EB350
	390	30x50	364	238	1.92	3.65	ALC10A391CF350
	390	35x35	386	259	1.82	3.07	ALC10A391DC350
	390	40x35	361	236	2.33	4.50	ALC10A391EC350
	470	35x40	321	216	2.07	3.47	ALC10A471DD350
	470	40x40	299	195	2.69	5.22	ALC10A471ED350
	560	35x50	268	180	2.80	4.80	ALC10A561DF350
	560	40x45	251	164	3.04	5.88	ALC10A561EE350
	680	40x50	207	136	3.46	6.65	ALC10A681EF350
	820	35x60	190	130	3.40	5.50	ALC10A821DH350
	820	40x55	174	114	3.84	7.16	ALC10A821EG350
	820	40x60	172	112	3.99	7.67	ALC10A821EH350
	1000	35x80	154	104	3.90	6.40	ALC10A102DL350
	1200	40x80	119	78	4.95	9.20	ALC10A122EL350
	1800	40x105	81	54	6.14	10.73	ALC10A182EP350
	2700	45x105	63	42	7.00	11.44	ALC10G272FP350
	3300	50x105	54	36	7.54	11.57	ALC10G332KP350

Ordering information

For details of ordering see pages 54 & 55.

PCB Snap-In Capacitors

ALC10

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 85 °C		Type number
					100 Hz	10 KHz	
400V d.c. (440V surge)	68	22x30	2042	1370	0.59	1.25	ALC10A680AB400
	100	25x30	1400	943	0.77	1.60	ALC10A101BB400
	100	22x40	1389	933	0.80	1.69	ALC10A101AD400
	120	25x35	1166	785	0.90	1.87	ALC10A121BC400
	150	30x30	950	645	1.04	2.03	ALC10A151CB400
	150	25x40	935	630	1.06	2.18	ALC10A151BD400
	180	30x35	791	536	1.20	2.36	ALC10A181CC400
	220	30x35	650	400	1.31	2.47	ALC10A221CC400
	220	30x40	648	440	1.41	2.74	ALC10A221CD400
	270	35x35	547	376	1.61	2.88	ALC10A271DC400
	270	40x30	441	284	1.85	3.67	ALC10A271EB400
	330	35x35	461	320	1.73	2.92	ALC10A331DC400
	330	30x50	438	299	1.82	3.42	ALC10A331CF400
	330	35x40	449	309	1.84	3.27	ALC10A331DD400
	330	40x35	378	252	2.29	4.21	ALC10A331EC400
	390	35x50	377	226	2.19	3.96	ALC10A391DF400
	390	40x40	312	203	2.62	4.86	ALC10A391ED400
	470	35x50	321	223	2.62	4.41	ALC10A471DF400
	470	40x40	230	156	2.74	5.21	ALC10A471ED400
	470	40x45	258	168	3.00	5.49	ALC10A471EE400
	560	35x50	278	180	2.57	4.04	ALC10A561DF400
	560	35x60	264	184	3.01	5.11	ALC10A561DH400
	560	40x50	216	141	3.41	6.19	ALC10A561EF400
	680	35x60	232	142	2.90	4.73	ALC10A681DH400
	680	40x60	177	114	3.99	7.14	ALC10A681EH400
	820	35x80	181	127	3.70	6.09	ALC10A821DL400
	1000	35x80	112	77	3.98	6.32	ALC10A102DL400
	1000	40x80	120	78	5.00	8.82	ALC10A102EL400
	1500	40x105	99	68	5.79	10.16	ALC10A152EP400
	2200	45x105	77	53	6.56	10.90	ALC10G222FP400
	2700	50x105	66	45	7.11	11.13	ALC10G272KP400
450V d.c. (495V surge)	56	22x30	2067	1372	0.57	1.27	ALC10A560AB450
	68	25x30	1708	1135	0.69	1.50	ALC10A680BB450
	82	22x40	1413	938	0.77	1.71	ALC10A820AD450
	100	25x35	1167	777	0.88	1.90	ALC10A101BC450
	120	30x30	989	663	1.00	2.03	ALC10A121CB450
	120	25x40	973	648	1.01	2.18	ALC10A121BD450
	150	25x40	785	524	1.12	2.35	ALC10A151BD450
	150	30x30	805	543	1.10	2.12	ALC10A151CB450
	150	30x35	792	531	1.17	2.38	ALC10A151CC450
	180	30x40	661	443	1.36	2.76	ALC10A181CD450
	220	35x35	559	379	1.56	2.89	ALC10A221DC450
	220	30x50	540	362	1.61	3.27	ALC10A221CF450
	220	40x30	517	311	1.77	3.68	ALC10A221EB450
	270	30x50	446	301	1.76	3.43	ALC10A271CF450
	270	35x35	470	322	1.68	2.91	ALC10A271DC450
	270	35x40	458	311	1.78	3.27	ALC10A271DD450
	270	40x35	427	259	2.07	4.22	ALC10A271EC450
	330	30x50	373	253	1.91	3.54	ALC10A331CF450
	330	35x50	373	253	2.41	4.38	ALC10A331DF450
	330	40x40	348	210	2.47	4.91	ALC10A331ED450
	390	35x50	240	166	2.60	4.41	ALC10A391DF450
	390	40x45	293	177	2.70	5.53	ALC10A391EE450
	470	35x50	252	155	2.43	4.03	ALC10A471DF450
	470	35x60	270	185	2.95	5.12	ALC10A471DH450
	470	40x50	243	147	3.08	6.25	ALC10A471EF450
	560	40x60	202	121	3.56	7.04	ALC10A561EH450
	680	35x80	190	131	3.61	6.09	ALC10A681DL450
	820	40x80	138	83	4.47	8.78	ALC10A821EL450
	1000	40x80	114	75	4.95	9.32	ALC10A102EL450
	1200	40x105	103	70	5.57	10.15	ALC10A122EP450
	1800	45x105	82	55	6.27	10.87	ALC10G182FP450
	2200	50x105	70	47	6.81	11.12	ALC10G222KP450

Ordering information

For details of ordering see pages 54 & 55.

ALC10

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 85 °C		Type number
					100 Hz	10 KHz	
500V d.c. (550V surge)	39	22x30	3150	2339	0.57	1.13	ALC10A390AB500
	56	25x30	2207	1642	0.74	1.44	ALC10A560BB500
	68	22x40	1811	1345	0.84	1.65	ALC10A680AD500
	68	25x35	1816	1351	0.87	1.70	ALC10A680BC500
	82	25x40	1507	1120	1.00	1.95	ALC10A820BD500
	82	30x30	1527	1140	0.99	1.84	ALC10A820CB500
	100	30x30	1000	765	1.08	1.94	ALC10A101CB500
	100	30x35	1220	840	1.15	2.16	ALC10A101CC500
	120	30x35	1052	786	1.25	2.28	ALC10A121CC500
	150	30x40	843	631	1.48	2.67	ALC10A151CD500
	180	30x50	699	522	1.78	3.27	ALC10A181CF500
	180	35x35	728	549	1.70	2.84	ALC10A181DC500
	180	40x30	699	522	1.76	3.22	ALC10A181EB500
	220	35x40	596	450	1.96	3.26	ALC10A221DD500
	220	40x35	571	426	2.07	3.82	ALC10A221EC500
	270	35x50	481	362	2.34	3.97	ALC10A271DF500
	270	40x40	466	348	2.41	4.42	ALC10A271ED500
	330	40x45	382	286	2.74	5.00	ALC10A331EE500
	390	35x60	340	258	2.87	4.67	ALC10A391DH500
	390	40x50	324	242	3.09	5.59	ALC10A391EF500
	470	40x60	269	201	3.56	6.43	ALC10A471EH500
	560	35x80	240	182	3.50	5.57	ALC10A561DL500
	680	40x80	187	140	4.40	7.77	ALC10A681EL500
	1000	40x105	130	98	5.43	9.18	ALC10A102EP500
	1500	45x105	110	82	5.97	9.76	ALC10G152FP500
	1800	50x105	94	70	6.45	10.09	ALC10G182KP500

Ordering information

For details of ordering see pages 54 & 55.

PCB Snap-In Capacitors

ALC40

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 105 °C		Type number
					100 Hz	10 KHz	
10V d.c. (11.5V surge)	12000	22x30	233	201	1.95	2.05	ALC40A123AB010
	15000	22x40	181	155	2.60	2.74	ALC40A153AD010
	18000	22x40	154	133	2.70	2.84	ALC40A183AD010
	18000	25x30	172	150	2.19	2.29	ALC40A183BB010
	22000	25x35	139	121	2.59	2.71	ALC40A223BC010
	27000	25x40	114	99	3.04	3.18	ALC40A273BD010
	27000	30x30	138	123	2.45	2.55	ALC40A273CB010
	33000	30x35	111	98	2.97	3.09	ALC40A333CC010
	39000	30x40	92	82	3.40	3.54	ALC40A393CD010
	47000	35x35	98	89	3.26	3.39	ALC40A473DC010
	56000	30x50	66	58	4.41	4.59	ALC40A563CF010
	56000	35x40	81	74	3.74	3.90	ALC40A563DD010
	56000	40x30	65	59	4.91	5.00	ALC40A563EB010
	68000	35x50	61	55	4.85	5.03	ALC40A683DF010
	68000	40x40	52	47	6.78	6.91	ALC40A683ED010
	82000	35x50	58	53	4.85	5.05	ALC40A823DF010
	82000	40x45	43	39	7.72	7.87	ALC40A823EE010
	100000	40x50	36	32	8.79	8.95	ALC40A104EF010
	120000	40x55	32	29	9.11	9.25	ALC40A124EG010
	150000	40x60	27	24	10.04	10.19	ALC40A154EH010
	180000	40x80	19	18	13.18	13.48	ALC40A184EL010
	220000	40x105	17	16	14.15	14.61	ALC40A224EP010
16V d.c. (18.5V surge)	8200	22x30	228	195	1.83	1.94	ALC40A822AB016
	10000	22x40	177	151	2.47	2.63	ALC40A103AD016
	12000	22x40	154	131	2.53	2.69	ALC40A123AD016
	12000	25x30	179	156	2.01	2.12	ALC40A123BB016
	15000	25x35	142	124	2.39	2.51	ALC40A153BC016
	18000	25x40	118	103	2.80	2.95	ALC40A183BD016
	18000	30x30	153	136	2.23	2.34	ALC40A183CB016
	22000	30x35	122	108	2.70	2.84	ALC40A223CC016
	27000	30x40	100	89	3.10	3.26	ALC40A273CD016
	33000	30x50	75	67	4.02	4.22	ALC40A333CF016
	33000	35x35	113	102	2.97	3.12	ALC40A333DC016
	33000	40x30	76	68	5.06	5.17	ALC40A333EB016
	39000	35x40	94	85	3.41	3.58	ALC40A393DD016
	39000	40x35	66	60	5.63	5.74	ALC40A393EC016
	47000	35x50	69	62	4.41	4.63	ALC40A473DF016
	47000	40x40	53	48	6.68	6.83	ALC40A473ED016
	56000	35x50	68	61	4.41	4.63	ALC40A563DF016
	56000	40x45	44	40	7.67	7.84	ALC40A563EE016
	68000	40x50	37	33	8.74	8.93	ALC40A683EF016
	82000	40x55	33	29	9.05	9.22	ALC40A823EG016
	100000	40x60	27	25	10.05	10.23	ALC40A104EH016
	120000	40x80	20	18	13.13	13.43	ALC40A124EL016
	220000	40x105	17	16	14.15	14.61	ALC40A224EP016
25V d.c. (28.5V surge)	5600	22x30	233	196	1.80	1.94	ALC40A562AB025
	6800	22x40	182	151	2.42	2.63	ALC40A682AD025
	8200	22x40	157	132	2.48	2.68	ALC40A822AD025
	8200	25x30	183	157	1.97	2.11	ALC40A822BB025
	10000	25x35	148	126	2.33	2.50	ALC40A103BC025
	12000	25x40	123	105	2.74	2.93	ALC40A123BD025
	12000	30x30	157	138	2.18	2.33	ALC40A123CB025
	15000	30x35	125	109	2.65	2.83	ALC40A153CC025
	18000	30x40	103	91	3.04	3.24	ALC40A183CD025
	22000	35x35	116	104	2.91	3.10	ALC40A223DC025
	27000	30x50	73	64	3.94	4.21	ALC40A273CF025
	27000	35x40	96	86	3.34	3.56	ALC40A273DD025
	27000	40x30	75	69	4.03	4.09	ALC40A273EB025
	33000	35x50	70	63	4.32	4.61	ALC40A333DF025
	33000	40x35	66	62	4.83	4.90	ALC40A333EC025
	39000	35x50	69	62	4.32	4.61	ALC40A393DF025
	39000	40x40	53	49	5.57	5.65	ALC40A393ED025
	47000	40x50	41	37	7.30	7.40	ALC40A473EF025
	56000	40x55	38	35	7.51	7.61	ALC40A563EG025
	82000	40x80	22	20	11.06	11.24	ALC40A823EL025
	120000	40x105	18	17	13.41	14.05	ALC40A124EP025

Ordering information

For details of ordering see pages 54 & 55.

ALC40

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 105 °C		Type number
35V d.c. (40V surge)	3900	22x30	239	196	1.75	1.93	ALC40A392AB035
	4700	22x40	187	152	2.35	2.63	ALC40A472AD035
	5600	22x40	163	133	2.41	2.67	ALC40A562AD035
	5600	25x30	190	159	1.93	2.10	ALC40A562BB035
	6800	25x35	153	128	2.27	2.49	ALC40A682BC035
	8200	25x40	127	106	2.67	2.92	ALC40A822BD035
	8200	30x30	162	140	2.13	2.32	ALC40A822CB035
	10000	30x35	130	112	2.59	2.82	ALC40A103CC035
	12000	30x40	107	92	2.96	3.23	ALC40A123CD035
	15000	35x35	120	105	2.84	3.09	ALC40A153DC035
	15000	40x30	87	78	4.24	4.31	ALC40A153EB035
	18000	30x50	76	66	3.85	4.19	ALC40A183CF035
	18000	35x40	99	87	3.25	3.55	ALC40A183DD035
	18000	40x35	77	70	4.66	4.73	ALC40A183EC035
	22000	35x50	73	64	4.22	4.59	ALC40A223DF035
	22000	40x40	61	55	5.49	5.58	ALC40A223ED035
	27000	35x50	71	63	4.22	4.59	ALC40A273DF035
	27000	40x45	51	46	6.30	6.40	ALC40A273EE035
	33000	40x50	42	38	7.16	7.27	ALC40A333EF035
	39000	40x60	33	30	8.75	8.91	ALC40A393EH035
40V d.c. (46V surge)	56000	40x80	23	21	10.94	11.14	ALC40A563EL035
	100000	40x105	17	16	13.04	13.77	ALC40A104EP035
	2700	22x30	259	207	1.69	1.92	ALC40A272AB040
	3300	22x40	202	160	2.26	2.60	ALC40A332AD040
	3900	25x30	202	166	1.87	2.09	ALC40A392BB040
	4700	22x40	154	124	2.38	2.69	ALC40A472AD040
	5600	25x35	149	124	2.23	2.49	ALC40A562BC040
	5600	30x30	171	144	2.08	2.31	ALC40A562CB040
	6800	25x40	123	102	2.61	2.92	ALC40A682BD040
	6800	30x35	145	120	2.55	2.84	ALC40A682CC040
	8200	30x35	129	110	2.53	2.81	ALC40A822CC040
	10000	30x40	107	91	2.90	3.22	ALC40A103CD040
	12000	30x50	80	68	3.75	4.18	ALC40A123CF040
	12000	35x35	121	106	2.77	3.08	ALC40A123DC040
	12000	40x30	88	79	4.13	4.22	ALC40A123EB040
	15000	35x40	100	87	3.18	3.53	ALC40A153DD040
	15000	40x40	63	56	5.66	5.78	ALC40A153ED040
	18000	35x50	73	64	4.12	4.58	ALC40A183DF040
	18000	40x45	53	47	6.46	6.60	ALC40A183EE040
	22000	40x50	43	39	7.34	7.50	ALC40A223EF040
50V d.c. (57.5V surge)	27000	40x55	39	35	7.50	7.63	ALC40A273EG040
	47000	40x80	23	21	10.42	10.59	ALC40A473EL040
	68000	40x105	17	16	12.71	13.47	ALC40A683EP040
	1800	22x30	282	218	1.60	1.90	ALC40A182AB050
	2200	22x40	222	170	2.13	2.57	ALC40A222AD050
	2700	22x40	187	145	2.22	2.64	ALC40A272AD050
	2700	25x30	213	169	1.80	2.09	ALC40A272BB050
	3300	25x35	172	136	2.13	2.47	ALC40A332BC050
	3900	25x35	156	126	2.15	2.48	ALC40A392BC050
	3900	30x30	178	147	2.01	2.31	ALC40A392CB050
	4700	25x40	129	104	2.52	2.90	ALC40A472BD050
	5600	30x35	135	112	2.44	2.80	ALC40A562CC050
	6800	30x40	112	93	2.80	3.21	ALC40A682CD050
	8200	30x50	84	69	3.63	4.16	ALC40A822CF050
	8200	35x35	126	107	2.68	3.07	ALC40A822DC050
	8200	40x30	91	80	4.15	4.26	ALC40A822EB050
	10000	30x50	104	88	3.40	4.04	ALC40A103CF050
	10000	35x40	104	88	3.08	3.52	ALC40A103DD050
	12000	35x50	77	65	3.98	4.56	ALC40A123DF050
	12000	40x40	64	57	5.42	5.53	ALC40A123ED050
50V d.c. (57.5V surge)	15000	35x50	57	44	4.73	5.42	ALC40A153DF050
	15000	40x45	53	47	6.11	6.23	ALC40A153EE050
	18000	40x50	44	39	6.98	7.12	ALC40A183EF050
	22000	40x60	34	30	8.45	8.63	ALC40A223EH050
	33000	40x80	24	21	10.41	10.62	ALC40A333EL050
	56000	40x105	18	16	12.64	13.72	ALC40A563EP050

Ordering information

For details of ordering see pages 54 & 55.

PCB Snap-In Capacitors

ALC40

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 105 °C		Type number
					100 Hz	10 KHz	
63V d.c. (72V surge)	1800	22x30	256	200	1.55	1.83	ALC40A182AB063
	2200	25x30	227	180	1.69	1.98	ALC40A222BB063
	2700	22x40	170	132	2.15	2.55	ALC40A272AD063
	3300	25x35	165	133	2.01	2.35	ALC40A332BC063
	3900	25x40	138	111	2.36	2.75	ALC40A392BD063
	3900	30x30	185	154	1.88	2.18	ALC40A392CB063
	4700	30x35	148	123	2.28	2.65	ALC40A472CC063
	5600	30x40	122	102	2.61	3.03	ALC40A562CD063
	5600	40x30	102	90	3.82	3.91	ALC40A562EB063
	6800	30x50	92	75	3.39	3.93	ALC40A682CF063
	6800	35x35	141	119	2.50	2.90	ALC40A682DC063
	6800	40x35	91	81	4.18	4.26	ALC40A682EC063
	8200	30x50	48	35	3.33	3.98	ALC40A822CF063
	8200	35x40	116	99	2.87	3.33	ALC40A822DD063
	8200	40x40	72	64	5.01	5.12	ALC40A822ED063
	10000	35x50	85	72	3.71	4.31	ALC40A103DF063
	10000	40x45	60	53	5.69	5.81	ALC40A103EE063
	12000	40x50	50	44	6.50	6.64	ALC40A123EF063
	15000	40x60	39	34	7.81	7.99	ALC40A153EH063
	22000	40x80	27	24	9.70	9.92	ALC40A223EL063
	33000	40x105	18	17	12.01	13.01	ALC40A333EP063
100V d.c. (115V surge)	560	22x30	383	276	1.22	1.67	ALC40A561AB100
	680	22x40	302	214	1.60	2.26	ALC40A681AD100
	820	22x40	259	186	1.68	2.31	ALC40A821AD100
	820	25x30	294	220	1.39	1.82	ALC40A821BB100
	1000	25x35	238	177	1.65	2.16	ALC40A102BC100
	1200	25x40	198	147	1.93	2.53	ALC40A122BD100
	1200	30x30	245	191	1.57	2.01	ALC40A122CB100
	1500	30x35	195	151	1.90	2.44	ALC40A152CC100
	1800	30x40	162	125	2.18	2.80	ALC40A182CD100
	2200	30x50	123	94	2.82	3.63	ALC40A222CF100
	2200	35x35	177	142	2.10	2.67	ALC40A222DC100
	2200	40x30	128	110	3.58	3.80	ALC40A222EB100
	2700	35x40	146	118	2.41	3.07	ALC40A272DD100
	2700	40x40	95	80	4.92	5.24	ALC40A272ED100
	3300	35x50	108	86	3.12	3.97	ALC40A332DF100
	3300	40x45	78	66	5.59	5.95	ALC40A332EE100
	3900	40x50	65	55	6.41	6.83	ALC40A392EF100
	4700	40x55	58	50	6.67	7.04	ALC40A472EG100
	5600	40x60	49	42	7.46	7.87	ALC40A562EH100
	8200	40x80	34	29	9.28	9.78	ALC40A822EL100
	10000	40x105	24	21	11.33	13.12	ALC40A103EP100
200V d.c. (230V surge)	220	22x30	644	442	0.88	1.41	ALC40A221AB200
	270	25x30	542	377	1.01	1.56	ALC40A271BB200
	330	22x40	428	294	1.21	1.95	ALC40A331AD200
	390	25x35	386	271	1.24	1.86	ALC40A391BC200
	470	25x40	320	224	1.45	2.19	ALC40A471BD200
	470	30x30	369	270	1.24	1.76	ALC40A471CB200
	560	30x35	301	219	1.50	2.13	ALC40A561CC200
	680	30x40	249	181	1.72	2.44	ALC40A681CD200
	680	40x30	202	158	2.97	3.67	ALC40A681EB200
	820	30x50	196	140	2.18	3.16	ALC40A821CF200
	820	35x35	252	191	1.70	2.34	ALC40A821DC200
	820	40x35	173	137	3.35	4.06	ALC40A821EC200
	1000	35x40	208	158	1.95	2.69	ALC40A102DD200
	1000	40x40	140	110	3.92	4.80	ALC40A102ED200
	1200	35x50	159	119	2.50	3.48	ALC40A122DF200
	1200	40x45	116	91	4.50	5.50	ALC40A122EE200
	1500	40x50	94	74	5.13	6.23	ALC40A152EF200
	1800	40x60	76	60	6.10	7.53	ALC40A182EH200
	2700	40x80	52	41	7.62	9.32	ALC40A272EL200
	3900	40x105	49	34	7.90	12.31	ALC40A392EP200
	5600	45x105	40	28	8.68	12.54	ALC40G562FP200
	6800	50x105	36	26	9.08	12.29	ALC40G682KP200

Ordering information

For details of ordering see pages 54 & 55.

ALC40

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 105 °C		Type number
					100 Hz	10 KHz	
250V d.c. (287V surge)	150	22x30	823	552	0.76	1.32	ALC40A151AB250
	180	22x40	674	448	0.96	1.73	ALC40A181AD250
	220	22x40	559	374	1.04	1.82	ALC40A221AD250
	220	25x30	592	405	0.93	1.50	ALC40A221BB250
	270	25x35	480	327	1.10	1.77	ALC40A271BC250
	330	25x40	393	268	1.29	2.08	ALC40A331BD250
	330	30x30	441	312	1.13	1.69	ALC40A331CB250
	390	30x35	364	256	1.36	2.04	ALC40A391CC250
	470	30x40	302	212	1.56	2.34	ALC40A471CD250
	470	40x30	258	193	2.59	3.49	ALC40A471EB250
	560	30x50	243	168	1.96	3.02	ALC40A561CF250
	560	35x35	297	217	1.57	2.25	ALC40A561DC250
	560	40x35	221	166	3.05	4.16	ALC40A561EC250
	680	35x40	245	179	1.80	2.59	ALC40A681DD250
	680	40x40	180	134	3.49	4.76	ALC40A681ED250
	820	35x50	190	137	3.12	4.66	ALC40A821DF250
	820	40x45	149	111	4.01	5.46	ALC40A821EE250
	1000	35x60	164	125	3.61	5.78	ALC40A102DH250
	1000	40x50	123	92	4.58	6.22	ALC40A102EF250
	1200	40x55	106	80	4.93	6.51	ALC40A122EG250
	1500	35x80	112	90	4.43	6.88	ALC40A152DL250
	1800	40x80	67	50	6.77	9.27	ALC40A182EL250
	2700	40x105	62	42	7.05	12.03	ALC40A272EP250
	3900	45x105	50	33	7.90	12.43	ALC40G392FP250
	4700	50x105	44	30	8.36	12.30	ALC40G472KP250
350V d.c. (385V surge)	82	22x30	1233	789	0.67	1.69	ALC40A820AB350
	100	22x40	1002	638	0.83	2.12	ALC40A101AD350
	120	22x40	841	537	0.91	2.27	ALC40A121AD350
	120	25x30	868	562	0.88	2.07	ALC40A121BB350
	150	25x35	694	449	1.04	2.46	ALC40A151BC350
	180	25x40	578	374	1.20	2.81	ALC40A181BD350
	180	30x30	618	410	1.17	2.46	ALC40A181CB350
	220	30x35	502	332	1.36	2.88	ALC40A221CC350
	270	30x40	410	272	1.59	3.33	ALC40A271CD350
	270	40x30	448	291	1.97	4.36	ALC40A271EB350
	330	35x35	378	260	1.79	3.24	ALC40A331DC350
	390	30x50	287	191	2.02	4.02	ALC40A391CF350
	390	35x40	317	218	2.02	3.67	ALC40A391DD350
	390	40x40	312	203	2.64	5.73	ALC40A391ED350
	470	35x50	251	170	2.72	4.90	ALC40A471DF350
	470	40x45	258	168	3.00	6.46	ALC40A471EE350
	560	35x50	224	155	2.57	4.44	ALC40A561DF350
	560	35x60	224	155	3.11	5.70	ALC40A561DH350
	560	40x50	216	141	3.41	7.27	ALC40A561EF350
	680	40x60	177	114	3.99	8.39	ALC40A681EH350
	820	35x80	150	102	3.82	6.72	ALC40A821DL350
	1000	40x80	120	78	5.00	9.98	ALC40A102EL350
	1500	40x105	99	68	6.00	11.47	ALC40A152EP350
	2200	45x105	77	53	6.79	12.06	ALC40G222FP350
	2700	50x105	66	45	7.34	12.08	ALC40G272KP350

Ordering information

For details of ordering see pages 54 & 55.

PCB Snap-In Capacitors

ALC40

Rated voltage d.c.	Cap (μ F)	Case Size (mm)	ESR ($m\Omega$) at 20 °C 100Hz (max)	Impedance ($m\Omega$) at 20 °C 10 KHz (max)	Ripple current (A) at 105 °C		Type number
					100 Hz	10 KHz	
400V d.c. (440V surge)	68	22x30	1717	1123	0.65	1.71	ALC40A680AB400
	82	22x40	1415	923	0.80	2.14	ALC40A820AD400
	100	22x40	1166	762	0.88	2.30	ALC40A101AD400
	100	25x30	1193	788	0.85	2.09	ALC40A101BB400
	120	25x35	991	653	1.00	2.45	ALC40A121BC400
	150	25x40	794	524	1.17	2.83	ALC40A151BD400
	150	30x30	835	562	1.14	2.46	ALC40A151CB400
	180	30x35	690	463	1.31	2.88	ALC40A181CC400
	220	30x40	565	379	1.54	3.33	ALC40A221CD400
	220	40x30	521	320	1.88	4.36	ALC40A221EB400
	270	35x35	470	322	1.73	3.23	ALC40A271DC400
	270	40x35	430	266	2.21	4.95	ALC40A271EC400
	330	30x50	383	258	1.98	4.02	ALC40A331CF400
	330	35x40	386	266	1.98	3.64	ALC40A331DD400
	330	40x40	350	216	2.56	5.76	ALC40A331ED400
	390	35x50	323	221	2.64	4.66	ALC40A391DF400
	390	40x45	295	182	2.88	6.48	ALC40A391EE400
	470	35x50	277	192	2.51	4.40	ALC40A471DF400
	470	35x60	270	185	3.04	5.78	ALC40A471DH400
	470	40x50	245	151	3.28	7.30	ALC40A471EF400
	560	40x55	209	130	3.62	7.78	ALC40A561EG400
	680	35x80	200	131	3.72	6.69	ALC40A681DL400
	680	40x60	173	107	4.08	8.58	ALC40A681EH400
	1000	40x80	118	73	4.85	10.16	ALC40A102EL400
	1200	40x105	103	70	5.76	11.46	ALC40A122EP400
	1800	45x105	82	55	6.48	12.04	ALC40G182FP400
	2200	50x105	70	47	7.02	12.08	ALC40G222KP400
450V d.c. (495V surge)	33	22x30	2851	1971	0.51	1.38	ALC40A330AB450
	47	22x40	2002	1385	0.67	1.84	ALC40A470AD450
	47	25x30	2011	1392	0.66	1.74	ALC40A470BB450
	56	25x35	1687	1168	0.76	2.03	ALC40A560BC450
	68	25x40	1391	963	0.88	2.34	ALC40A680BD450
	68	30x30	1403	974	0.87	2.19	ALC40A680CB450
	82	30x35	1163	807	1.01	2.54	ALC40A820CC450
	100	30x40	955	663	1.18	2.95	ALC40A101CD450
	120	35x35	810	565	1.36	3.11	ALC40A121DC450
	150	30x50	642	446	1.54	3.67	ALC40A151CF450
	150	35x40	651	454	1.57	3.53	ALC40A151DD450
	150	40x30	642	447	1.73	4.14	ALC40A151EB450
	180	35x50	541	377	1.88	4.27	ALC40A181DF450
	180	40x35	538	374	2.01	4.70	ALC40A181EC450
	220	35x50	449	315	2.28	4.71	ALC40A221DF450
	220	40x40	440	306	2.34	5.47	ALC40A221ED450
	270	40x50	356	248	2.80	6.74	ALC40A271EF450
	330	35x60	285	198	2.91	5.53	ALC40A331DH450
	330	40x55	293	204	3.14	7.29	ALC40A331EG450
	390	40x60	249	174	3.50	8.04	ALC40A391EH450
	470	35x80	203	138	3.51	6.68	ALC40A471DL450
	560	40x80	175	122	4.32	9.57	ALC40A561EL450
	820	40x105	121	85	5.34	11.05	ALC40A821EP450
	1200	45x105	105	71	5.84	11.64	ALC40G122FP450
	1500	50x105	86	59	6.44	11.85	ALC40G152KP450

Ordering information

For details of ordering see pages 54 & 55.