
REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	C	ECO-15414	01/16/2026	DMAY	DGUST

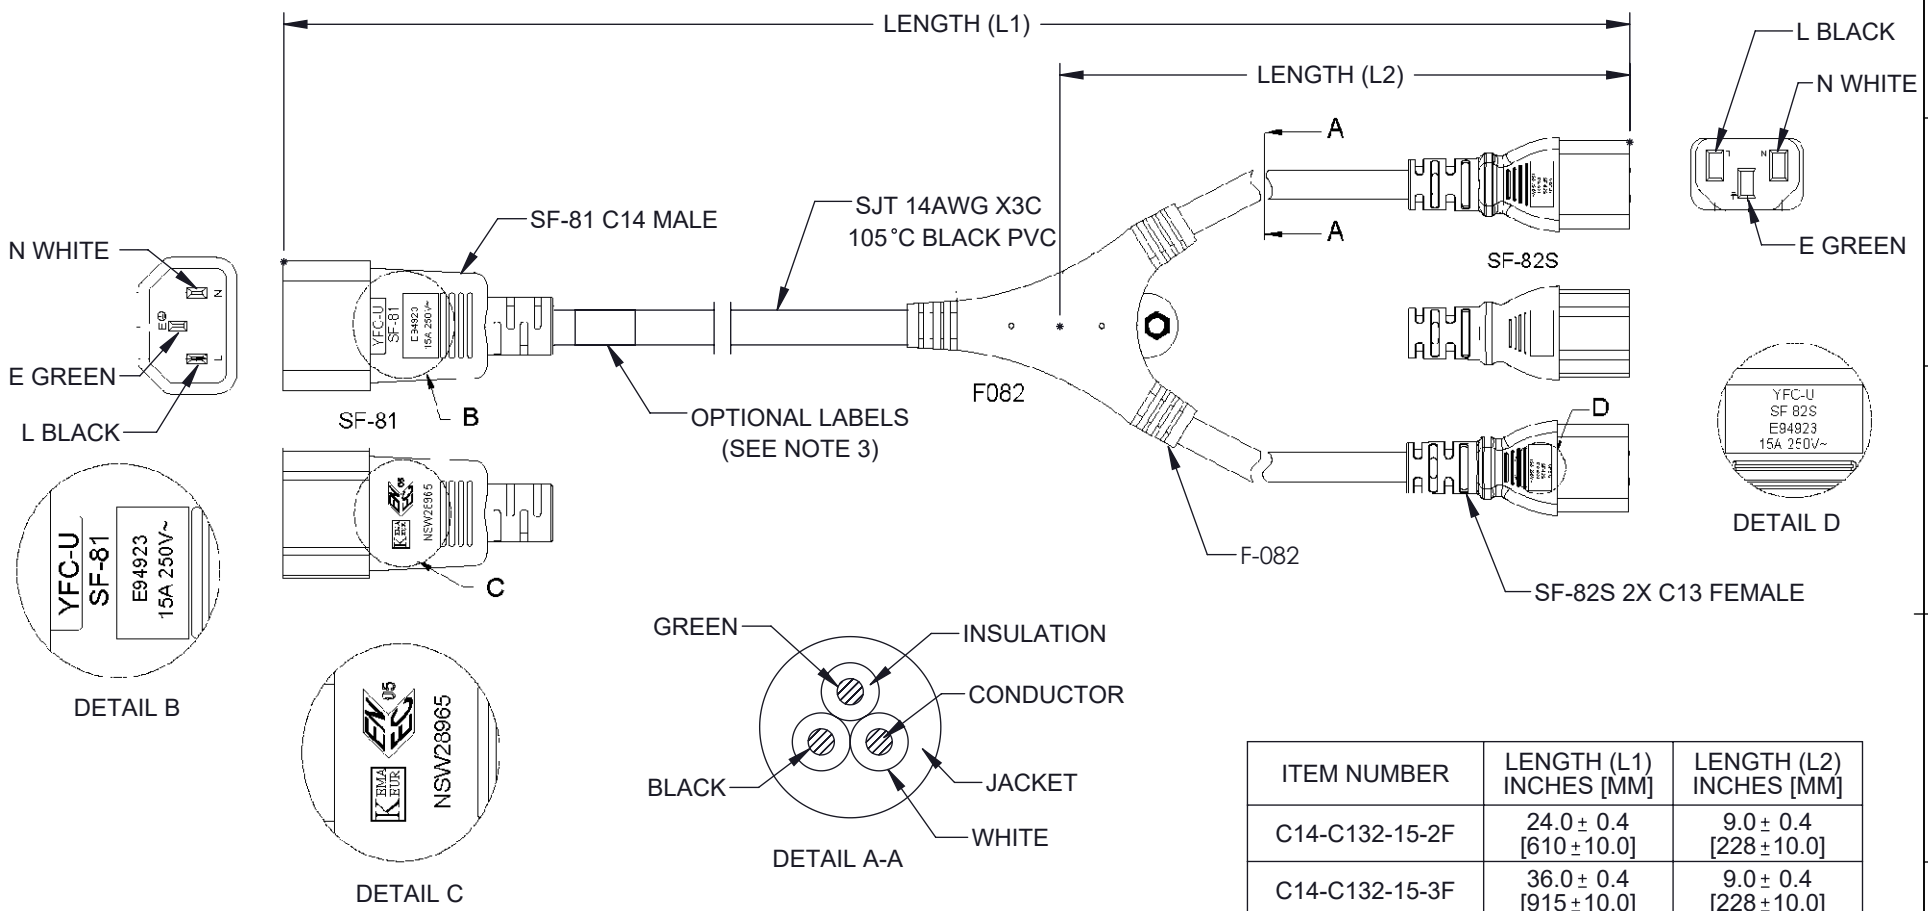

ITEM NUMBER	LENGTH (L1) INCHES [MM]	LENGTH (L2) INCHES [MM]
C14-C132-15-2F	24.0 ± 0.4 [610 ± 10.0]	9.0 ± 0.4 [228 ± 10.0]
C14-C132-15-3F	36.0 ± 0.4 [915 ± 10.0]	9.0 ± 0.4 [228 ± 10.0]
C14-C132-15-4F	48.0 ± 0.8 [1220 ± 20.0]	9.0 ± 0.4 [228 ± 10.0]
C14-C132-15-6F	72.0 ± 0.8 [1830 ± 20.0]	24.0 ± 0.4 [609 ± 10.0]

NOTES:

1. VOLTAGE RATING:
   DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec
   CONDUCTOR RESISTANCE ≤ 8.88Ω/1000M
   VOLTAGE RATING AC 300V
2. CABLE MARKING :
   (UL) E135710-F5 SJT 3×14AWG 105°C 300V VW-1
   c(UL)SJT 3×2.08 mm² (14AWG) 105°C 300V FT2
3. OPTIONAL LABELS:
   OPTIONAL LABEL(S) MAY INCLUDE
   UL, CURRENT AND/OR WARNING
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [ ] ARE MILLIMETERS
TOLERANCES:
.X = ±.2 [5] | FRACTIONS ± 1/32
.XX = ±.02 [0.5] | ANGLES ± 1°
.XXX = ±.005 [0.13]
CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com®
an INFINITE brand
Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION
C14 - 2C13 SPLIT POWER CORD, 15A, 250V

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	MVEERAPPAN	C14-C132-15	C

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.