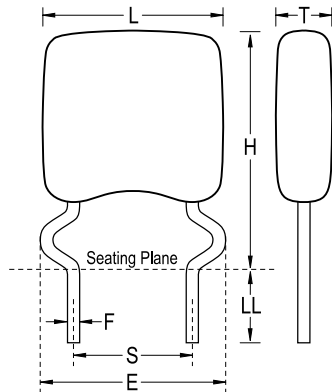


GoldMax 300 Comm C0G, Ceramic, 3.6 pF, +/-0.5 pF, 25 VDC, C0G, GoldMax, Commercial Standard, Lead Spacing = 5.08mm

**Dimensions**

L	5.08mm MAX
H	8.13mm MAX
T	3.18mm MAX
S	5.08mm +/-0.78mm
LL	5.08mm MIN
F	0.51mm +0.1/-0.025mm
E	6.86mm NOM

**Packaging Specifications**

Packaging:	Bulk, Bag
Packaging Quantity:	500

**General Information**

Supplier:	KEMET
Series:	GoldMax 300 Comm C0G
Style:	Radial
Description:	GoldMax, Commercial Standard
RoHS:	Yes
Termination:	Tin
Failure Rate:	N/A
Halogen Free:	Yes

**Specifications**

Capacitance:	3.6 pF
Capacitance Tolerance:	+/-0.5 pF
Voltage DC:	25 VDC
Dielectric Withstanding Voltage:	62.5 V
Temperature Range:	-55/+125C
Temperature Coefficient:	C0G
Dissipation Factor:	0.10% 25C
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	100 GOhms