



Features:

- 55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 0.1 pF to 0.1 uF
- 100% RoHS compliant and lead free without exemption
- Halogen free
- REACH compliant



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Type/Code	Dielectric Code	Standard Tolerance		Capacitance Range	
		Code	Description	50V	100V
CML0402	C0G	C	± 0.25 pF	0.1 pF - 8.2 pF	-
		J	± 5%	10 pF - 1000 pF	-
CML0603	C0G	C	± 0.25 pF	0.1 pF - 6.8 pF	0.5 pF - 8.2 pF
		J	± 5%	10 pF - 6800 pF	10 pF - 1000 pF
CML0805	C0G	C	± 0.25 pF	0.3 pF - 6.8 pF	0.5 pF - 8.2 pF
		J	± 5%	10 pF - 0.022 uF	10 pF - 3300 pF
CML1206	C0G	C	± 0.25 pF	0.3 pF - 8.2 pF	0.5 pF - 8.2 pF
		J	± 5%	10 pF - 3300 pF 3900 pF - 4700 pF	10 pF - 3300 pF -
CML1210	C0G	C	± 0.25 pF	-	1 pF - 8.2 pF
		J	± 5%	10 pF - 0.1 uF	10 pF - 6800 pF
CML1812	C0G	C	± 0.25 pF	-	3 pF - 8.2 pF
		J	± 5%	10 pF - 0.1 uF	10 pF - 0.01 uF

Note: Capacitance values < 10 pF: B = ± 0.1 pF may be available
Capacitance values ≥ 10 pF: G = ± 2% may be available

How to Order

C	M	L	0	4	0	2	C	0	G	1	0	0	J	T	5	0	V
Product Series		Size	Dielectric	Capacitance Range		Tolerance (*)		Packaging			Max Working Voltage						
Code	Description	Code	Code	0.1pF to 0.10uF (E12)		Code	Description	Code	Description	Size and Quantity							
CML	Multilayer Ceramic	0402	C0G	EIA Code	Capacitance	B	± 0.1 pF	T	7" Paper Reel	Refer to Packaging Specifications	50V						
		0603		0R1	0.1 pF	C	± 0.25 pF		7" Plastic Tape		100V						
		0805		100	10 pF	G	± 2%										
		1206		101	100 pF	J	± 5%										
		1210		102	1000 pF												
		1812		103	0.01 uF												
				104	0.1 uF												
												(*) Other tolerances may be available. Contact Stackpole.					


(*) Other tolerances may be available. Contact Stackpole.

Capacitance and Voltage Available												
Dielectric		C0G										
EIA Code	Size VDCW	0402 50V	0603 50V	0603 100V	0805 50V	0805 100V	1206 50V	1206 100V	1210 50V	1210 100V	1812 50V	1812 100V
0R1	0.1 pF											
0R2	0.2 pF											
0R3	0.3 pF											
0R4	0.4 pF											
0R5	0.5 pF											
0R6	0.6 pF											
0R7	0.7 pF											
0R8	0.8 pF											
0R9	0.9 pF											
1R0	1 pF											
1R2	1.2 pF											
1R5	1.5 pF											
1R8	1.8 pF											
2R0	2 pF											
2R2	2.2 pF											
2R7	2.7 pF											
3R0	3 pF											
3R3	3.3 pF											
3R9	3.9 pF											
4R7	4.7 pF											
5R0	5 pF											
5R6	5.6 pF											
6R8	6.8 pF											
8R2	8.2 pF											
100	10 pF											
120	12 pF											
150	15 pF											
180	18 pF											
220	22 pF											
270	27 pF											
330	33 pF											
390	39 pF											
470	47 pF											
560	56 pF											
680	68 pF											
820	82 pF											
101	100 pF											
121	120 pF											
151	150 pF											
181	180 pF											
221	220 pF											
271	270 pF											
331	330 pF											
391	390 pF											
471	470 pF											
561	560 pF											
681	680 pF											
751	750 pF											
821	820 pF											
102	1000 pF											
122	1200 pF											
152	1500 pF											
182	1800 pF											
222	2200 pF											
272	2700 pF											
332	3300 pF											
392	3900 pF											
472	4700 pF											
562	5600 pF											
682	6800 pF											
822	8200 pF											
103	0.01 uF											


Capacitance and Voltage Available (cont.)

Dielectric		C0G										
EIA	Size	0402	0603		0805		1206		1210		1812	
Code	VDCW	50V	50V	100V	50V	100V	50V	100V	50V	100V	50V	100V
123	0.012 uF											
153	0.015 uF											
183	0.018 uF											
223	0.022 uF											
273	0.027 uF											
333	0.033 uF											
473	0.047 uF											
563	0.056 uF											
683	0.068 uF											
823	0.082 uF											
104	0.1 uF											

Mechanical Specifications and Packaging Specifications

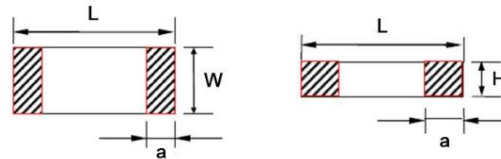


Type/Code	Voltage	Capacitance Value	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402C0G	50V	0.1 pF - 1000 pF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603C0G	50V - 100V	0.1 pF - 6800 pF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.012 ± 0.004 0.30 ± 0.10	inches mm	4000	-
CML0805C0G	50V	0.3 pF - 1500 pF 4700 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		1800 pF - 3900 pF	0.079 ± 0.008	0.049 ± 0.008	0.031 ± 0.004	0.020 ± 0.008	inches	4000	-
		5600 pF - 8200 pF	2.00 ± 0.20	1.25 ± 0.20	0.80 ± 0.09	0.50 ± 0.20	mm	-	2000
		0.01 uF - 0.022 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	100V	0.5 pF - 3300 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
CML1206C0G	50V	0.3 pF - 8200 pF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.028 ± 0.002 0.70 ± 0.05	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.01 uF - 0.1 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	100V	0.5 pF - 3300 pF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.09	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
CML1210C0G	50V	10 pF - 0.1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
	100V	1 pF - 6800 pF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812C0G	50V	10 pF - 0.1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	100V	3 pF - 0.01 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000

Environmental Characteristics					
Test	Test Specification		Test Condition		
Capacitance	Should be within the specified tolerance.		C0G: (Class I) Cap ≤ 1000 pF 1.0 ± 0.2 Vrms, 1 MHz ± 10% Cap > 1000 pF 1.0 ± 0.2 Vrms, 1 KHz ± 10%		
Dissipation Factor (DF)	C0G (Class I)	DF	Capacitance	Measuring Frequency	1 ± 0.2 Vrms
		≤ 0.56%	Cr < 5 pF	1 MHz ± 10%	
		1.5 [(150 / Cr) + 7] x 10 - 4	5 pF ≤ Cr < 50 pF		
		≤ 0.15%	50 pF ≤ Cr ≤ 1000 pF		
		≤ 0.15%	> 1000 pF	1 KHZ ± 10%	
Insulation Resistance	C0G (Class I)	C ≤ 10 nF, Ri ≥ 50000 MΩ C > 10 nF, Ri*CR ≥ 500 S	Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA		
Dielectric Withstanding Voltage	No breakdown or damage.		Measuring voltage: Class I: 300% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.		
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.		Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds		
			Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds		
			Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds		
Resistance to Soldering Heat	Item	C0G	Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.		
	Δ C/C	≤ ± 0.5% or ± 0.5 pF whichever is larger			
	DF	Same to initial value			
	IR	Same to initial value			
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.				
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%		Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm/second The measurement should be made with the board in the bending position.  Unit: mm		
Termination Adhesion	No visible damage		Applied Force: 5 N Duration: 10 ± 1 seconds		
Temperature Cycle	C0G: Δ C/C: ≤ ± 1% or ± 1 pF, whichever is larger		Preheating Conditions: up-category Temperature: 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:		
			Step	Temp. (°C)	Time (min.)
			1	Low-category temp. C0G: -55°C	30 ± 3
			2	Normal temp. (+20)	2 - 3
			3	Up-category temp. C0G: +125°C	30 ± 3
			4	Normal temp. (+20°C)	2 - 3
			Recovery time after test: 24 ± 2 hours		

Environmental Characteristics (cont.)


Test	Test Specification	Test Condition
Moisture Resistance	C0G: $\Delta C/C: \leq \pm 2\%$ or ± 1 pF, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 2500$ M Ω or $R_i \cdot CR \geq 25$ S whichever is smaller Appearance: No visible damage	Temperature: $40^\circ\text{C} \pm 2^\circ\text{C}$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I)
Life Test	C0G: $\Delta C/C: \leq \pm 2\%$ or ± 1 pF, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 4000$ M Ω or $R_i \cdot CR \geq 40$ S whichever is smaller Appearance: No visible damage	Low-voltage ($< 100\text{V}$) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 125°C (C0G) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I)
Middle and High Voltage Life Test	C0G: $\Delta C/C: \leq \pm 2\%$ or ± 1 pF, whichever is larger DF: Not more than twice of initial value. IR: C0G: $R_i \geq 4000$ M Ω or $R_i \cdot CR \geq 40$ S whichever is smaller Appearance: No visible damage	Applied voltage: $100\text{V} \leq \text{rated voltage} < 500\text{V}$: 2 multiple $500\text{V} \leq \text{rated voltage} \leq 1000\text{V}$: 1.5 multiple $> 1000\text{V}$ rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: 125°C (C0G) Recovery Conditions: Room temperature Recovery Time: 24 hours (Class I)

Reel Specifications



Type/Code	A	B	C	D	E	F	G	Unit
CML_C0G (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

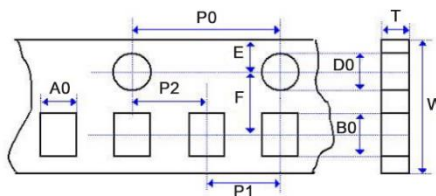


Type/Code	A ₀	B ₀	T	W	P ₀	Unit
CML0402C0G	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603C0G	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805C0G	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206C0G	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm

Paper Tape Specifications (cont.)

Type/Code	P ₁	P ₂	D ₀	E	F	Unit
CML0402C0G	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603C0G	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805C0G	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206C0G	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm

Plastic Tape Specifications

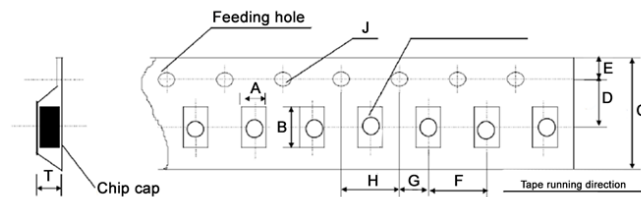


Type/Code	A	B	C	D	E	Unit
CML0805C0G	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206C0G	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210C0G	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812C0G	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805C0G	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206C0G	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210C0G	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812C0G	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

Recommended Solder Pad for Wave Soldering

Type	0603	0805	1206	1210	Unit
Length (L)	0.063 1.60	0.079 2.00	0.126 3.20	0.126 3.20	inches mm
Width (W)	0.031 0.80	0.049 1.25	0.063 1.60	0.098 2.50	inches mm
a	0.031 ~ 0.039 0.80 ~ 1.00	0.039 ~ 0.055 1.00 ~ 1.40	0.071 ~ 0.098 1.80 ~ 2.50	0.071 ~ 0.098 1.80 ~ 2.50	inches mm
b	0.020 ~ 0.031 0.50 ~ 0.80	0.031 ~ 0.059 0.80 ~ 1.50	0.031 ~ 0.067 0.80 ~ 1.70	0.031 ~ 0.067 0.80 ~ 1.70	inches mm
c	0.024 ~ 0.031 0.60 ~ 0.80	0.035 ~ 0.047 0.90 ~ 1.20	0.047 ~ 0.063 1.20 ~ 1.60	0.071 ~ 0.098 1.80 ~ 2.50	inches mm

NOTE: Solder pad information is for reference only.

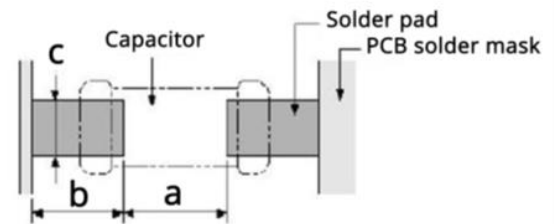

Recommended Solder Pad for Reflow Soldering

Type	0402	0603	0805	1206	1210	1812	Unit
Length (L)	0.043	0.063	0.079	0.126	0.126	0.177	inches
	1.10	1.60	2.00	3.20	3.20	4.50	mm
Width (W)	0.020	0.031	0.049	0.063	0.098	0.126	inches
	0.50	0.80	1.25	1.60	2.50	3.20	mm
a	0.018 ~ 0.022	0.024 ~ 0.031	0.031 ~ 0.047	0.071 ~ 0.098	0.071 ~ 0.098	0.098 ~ 0.138	inches
	0.45 ~ 0.55	0.60 ~ 0.80	0.80 ~ 1.20	1.80 ~ 2.50	1.80 ~ 2.50	2.50 ~ 3.50	mm
b	0.016 ~ 0.020	0.024 ~ 0.031	0.024 ~ 0.047	0.024 ~ 0.059	0.024 ~ 0.059	0.039 ~ 0.071	inches
	0.40 ~ 0.50	0.60 ~ 0.80	0.60 ~ 1.20	0.60 ~ 1.50	0.60 ~ 1.50	1.00 ~ 1.80	mm
c	0.018 ~ 0.022	0.024 ~ 0.031	0.035 ~ 0.063	0.047 ~ 0.079	0.071 ~ 0.126	0.091 ~ 0.138	inches
	0.45 ~ 0.55	0.60 ~ 0.80	0.90 ~ 1.60	1.20 ~ 2.00	1.80 ~ 3.20	2.30 ~ 3.50	mm

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YYMMWW)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to "REACH"


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- 55°C to 85°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 0.047 uF to 100 uF
- 100% RoHS compliant and lead free without exemption
- Halogen free
- REACH compliant



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Electrical Specifications									
Type / Code	Dielectric	Standard Tolerance		Capacitance Range					
	Code	Code	Description	10V	16V	25V	50V		
CML0402	X5R	K	± 10%	120 pF - 0.039 uF					
				0.047 uF - 0.1 uF					-
				0.12 uF - 0.47 uF			-		
CML0603	X5R	K	± 10%	0.47 uF - 1 uF					
				1.2 uF - 2.2 uF					-
CML0805	X5R	K	± 10%	150 pF - 0.39 uF					
				0.47 uF - 2.2 uF					-
CML1206	X5R	K	± 10%	150 pF - 4.7 uF					
				10 uF	-				
CML1210	X5R	K	± 10%	4.7 uF - 22 uF					-
				33 uF - 47 uF			-		
				68 uF - 100 uF	-				
CML1812	X5R	K	± 10%	-	4.7 uF - 6.8 uF			-	
				10 uF					-
				15 uF - 22 uF			-		
				33 uF - 47 uF	-				

Note: J = ± 5% tolerance may be available

How to Order


C	M	L	0	4	0	2	X	5	R	1	0	4	K	T	5	0	V
Product Series		Size	Dielectric	Capacitance Range		Tolerance (*)		Packaging				Max Working Voltage					
Code	Description	Code	Code	0.1pF to 0.10uF (E12)		Code	Description	Code	Description	Size	Quantity						
CML	Multilayer Ceramic	0402	X5R	EIA Code	Capacitance	J	± 5%	T	7" Paper Reel	Refer to Packaging Specifications		10V					
		0603		473	0.047 uF	K	± 10%		7" Plastic Tape	16V							
		0805		104	0.1 uF				25V								
		1206		105	1 uF			50V									
		1210		106	10 uF												
		1812		107	100 uF												
(*) Other tolerances may be available. Contact Stackpole.																	

(*) Other tolerances may be available. Contact Stackpole.

Capacitance and Voltage Available

Dielectric		X5R																						
EIA	Size	0402				0603				0805			1206				1210			1812				
Code	VDCW	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	10V	16V	25V	50V	10V	16V	25V	10V	16V	25V		
473	0.047 uF																							
563	0.056 uF																							
683	0.068 uF																							
823	0.082 uF																							
104	0.1 uF																							
154	0.15 uF																							
224	0.22 uF																							
334	0.33 uF																							
474	0.47 uF																							
684	0.68 uF																							
105	1 uF																							
155	1.5 uF																							
225	2.2 uF																							
335	3.3 uF																							
475	4.7 uF																							
685	6.8 uF																							
106	10 uF																							
156	15 uF																							
226	22 uF																							
336	33 uF																							
476	47 uF																							
686	68 uF																							
107	100 uF																							

Mechanical Specifications and Packaging Specifications

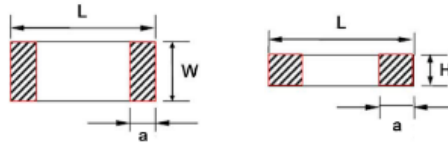


Type / Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402X5R	10V - 50V	0.1 uF - 4.7 uF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603X5R	10V - 50V	0.47 uF - 10 uF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.012 ± 0.004 0.30 ± 0.10	inches mm	4000	-
CML0805X5R	10V - 16V	1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	25V	1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		3.3 uF - 10 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000

Mechanical Specifications and Packaging Specifications (cont.)


Type / Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML1206X5R	10V	2.2 uF - 3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 22 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		47 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	16V - 25V	2.2 uF - 3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 22 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	50V	2.2 uF - 3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1210X5R	10V	4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		6.8 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		15 uF - 100 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	16V	4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		6.8 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		15 uF - 47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	25V	4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		6.8 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		15 uF - 22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
CML1812X5R	10V - 25V	4.7 uF - 47 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000

Environmental Characteristics

Test	Test Specification					Test Condition
Capacitance	Should be within the specified tolerance.					X5R: (Class II) Cap ≤ 10 uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10 uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%
Dissipation Factor (DF)	X5R (Class II)	X5R (≥ 0402)	≥ 50V ≤ 2.5%	25V ≤ 3.5% (C < 0.47 uF) ≤ 10.0% (C ≥ 0.47 uF)	16V ≤ 5% (C < 0.15 uF) ≤ 10.0% (C ≥ 0.15)	Cap ≤ 10 uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10 uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%
Insulation Resistance	X5R (Class II)	C ≤ 25 nF, Ri ≥ 10,000 MΩ C > 25 nF, Ri*CR > 100 S				Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA
Dielectric Withstanding Voltage	No breakdown or damage.					Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.


Environmental Characteristics (cont.)				
Test	Test Specification	Test Condition		
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.	Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds		
		Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds		
		Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds		
Resistance to Soldering Heat	Item	X5R		
	Δ C/C	-5 ~ + 10%		
	DF	Same to initial value		
	IR	Same to initial value		
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.			
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%	Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm 		
Termination Adhesion	No visible damage	Applied Force: 5 N Duration: 10 ± 1 seconds		
Temperature Cycle	X5R: Δ C/C: ≤ ± 10%	Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:		
		Step	Temp. (°C)	Time (min.)
		1	Low-category temp. X5R: -55°C	30 ± 3
		2	Normal temp. (+20°C)	2 - 3
		3	Up-category temp. X5R: +85°C	30 ± 3
		4	Normal temp. (+20°C)	2 - 3
		Recovery time after test: 24 ± 2 hours		
Moisture Resistance	X5R: Δ C/C: ≤ ± 10% DF: Not more than twice of initial value. IR: X5R: Ri ≥ 1000 MΩ or Ri*CR ≥ 25 S whichever is smaller Appearance: No visible damage	Temperature: 40°C ± 2°C Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)		
Life Test	X5R: Δ C/C: ≤ ± 20% DF: Not more than twice of initial value. IR: X5R: Ri ≥ 2000 MΩ or Ri*CR ≥ 50 S whichever is smaller Appearance: No visible damage	Low-voltage (< 100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 85°C (X5R) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)		

Reel Specifications

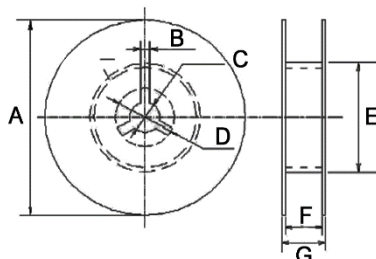


Type/Code	A	B	C	D	E	F	G	Unit
CML_X5R (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

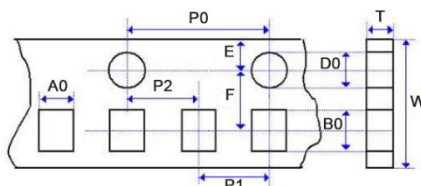

Type/Code	A0	B0	T	W	P0	Unit
CML0402X5R	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603X5R	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805X5R	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206X5R	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm
Type/Code	P1	P2	D0	E	F	Unit
CML0402X5R	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603X5R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805X5R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206X5R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm


Plastic Tape Specifications

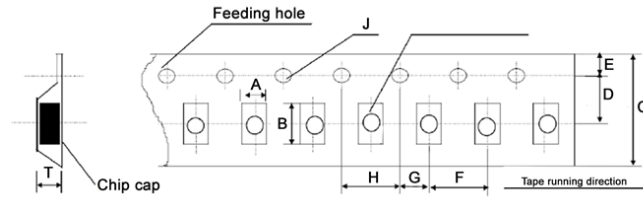

Type/Code	A	B	C	D	E	Unit
CML0805X5R	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206X5R	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210X5R	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812X5R	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805X5R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206X5R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210X5R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812X5R	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

Recommended Solder Pad for Wave Soldering

Type	0603	0805	1206	1210	Unit
Lengh (L)	0.063 1.60	0.079 2.00	0.126 3.20	0.126 3.20	inches mm
Width (W)	0.031 0.80	0.049 1.25	0.063 1.60	0.098 2.50	inches mm
a	0.031 ~ 0.039 0.80 ~ 1.00	0.039 ~ 0.055 1.00 ~ 1.40	0.071 ~ 0.098 1.80 ~ 2.50	0.071 ~ 0.098 1.80 ~ 2.50	inches mm
b	0.020 ~ 0.031 0.50 ~ 0.80	0.031 ~ 0.059 0.80 ~ 1.50	0.031 ~ 0.067 0.80 ~ 1.70	0.031 ~ 0.067 0.80 ~ 1.70	inches mm
c	0.024 ~ 0.031 0.60 ~ 0.80	0.035 ~ 0.047 0.90 ~ 1.20	0.047 ~ 0.063 1.20 ~ 1.60	0.071 ~ 0.098 1.80 ~ 2.50	inches mm

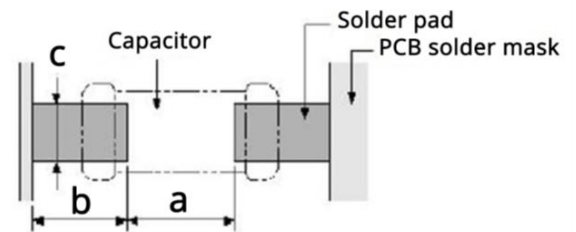

NOTE: Solder pad information is for reference only.

Recommended Solder Pad for Reflow Soldering

Type	0402	0603	0805	1206	1210	1812	Unit
Lengh (L)	0.043 1.10	0.063 1.60	0.079 2.00	0.126 3.20	0.126 3.20	0.177 4.50	inches mm
Width (W)	0.020 0.50	0.031 0.80	0.049 1.25	0.063 1.60	0.098 2.50	0.126 3.20	inches mm
a	0.018 ~ 0.022 0.45 ~ 0.55	0.024 ~ 0.031 0.60 ~ 0.80	0.031 ~ 0.047 0.80 ~ 1.20	0.071 ~ 0.098 1.80 ~ 2.50	0.071 ~ 0.098 1.80 ~ 2.50	0.098 ~ 0.138 2.50 ~ 3.50	inches mm
b	0.016 ~ 0.020 0.40 ~ 0.50	0.024 ~ 0.031 0.60 ~ 0.80	0.024 ~ 0.047 0.60 ~ 1.20	0.024 ~ 0.059 0.60 ~ 1.50	0.024 ~ 0.059 0.60 ~ 1.50	0.039 ~ 0.071 1.00 ~ 1.80	inches mm
c	0.018 ~ 0.022 0.45 ~ 0.55	0.024 ~ 0.031 0.60 ~ 0.80	0.035 ~ 0.063 0.90 ~ 1.60	0.047 ~ 0.079 1.20 ~ 2.00	0.071 ~ 0.126 1.80 ~ 3.20	0.091 ~ 0.138 2.30 ~ 3.50	inches mm

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to "REACH"


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- -55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 100 pF to 47 uF
- 100% RoHS compliant and lead free without exemption
- Halogen free
- REACH compliant



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Type/Code	Dielectric Code	Standard Tolerance		Capacitance Range				
		Code	Description	10V	16V	25V	50V	100V
CML0402	X7R	K	± 10%	120 pF - 0.039 uF			-	
				0.012 uF - 0.1 uF			-	
CML0603	X7R	K	± 10%	150 pF - 0.1 uF			-	
				0.012 uF - 0.18 uF			-	
				0.12 uF - 0.33 uF			-	
CML0805	X7R	K	± 10%	150 pF - 0.1 uF			-	
				0.12 uF - 0.39 uF			-	
				0.12 uF - 2.2 uF			-	
CML1206	X7R	K	± 10%	150 pF - 0.1 uF			-	
				2.2 uF - 4.7 uF			-	
				-			150 pF - 2.2 uF	
CML1210	X7R	K	± 10%	220 pF - 10 uF			-	
				-			-	
				47 uF			-	
CML1812	X7R	K	± 10%	-			270 pF - 1 uF	
				-			-	
				6.8 uF			-	

Note: J = 5% tolerance may be available

How to Order


C	M	L	0	4	0	2	X	7	R	1	0	3	K	T	5	0	V
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Product Series		Size	Dielectric		Capacitance Range		Tolerance (*)		Packaging				Max Working Voltage
Code	Description	Code	Code		0.1pF to 0.10uF (E12)		Code	Description	Code	Description	Size	Quantity	
CML	Multilayer Ceramic	0402	X7R		EIA Code	Capacitance	J	± 5%	T	7" Paper Reel	Refer to Packaging Specifications		10V
		0603			101	100 pF	K	± 10%		7" Plastic Tape			16V
		0805			102	1000 pF							25V
		1206			103	0.01 uF							50V
		1210			104	0.1 uF							100V
		1812			105	1 uF							
					106	10 uF							

(*) Other tolerances may be available. Contact Stackpole.

Capacitance and Voltage Available																													
Dielectric		X7R																											
EIA	Size	0402				0603				0805				1206				1210				1812							
Code	VDCW	10V	16V	25V	50V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	16V	25V	50V	100V
101	100 pF																												
121	120 pF																												
151	150 pF																												
181	180 pF																												
201	200 pF																												
221	220 pF																												
271	270 pF																												
331	330 pF																												
391	390 pF																												
471	470 pF																												
561	560 pF																												
681	680 pF																												
751	750 pF																												
821	820 pF																												
102	1000 pF																												
122	1200 pF																												
152	1500 pF																												
182	1800 pF																												
222	2200 pF																												
272	2700 pF																												
332	3300 pF																												
392	3900 pF																												
472	4700 pF																												
562	5600 pF																												
682	6800 pF																												
822	8200 pF																												
103	0.01 uF																												
123	0.012 uF																												
153	0.015 uF																												
183	0.018 uF																												
223	0.022 uF																												
273	0.027 uF																												
333	0.033 uF																												
393	0.039 uF																												
473	0.047 uF																												
563	0.056 uF																												
683	0.068 uF																												
823	0.082 uF																												
104	0.1 uF																												
124	0.12 uF																												
154	0.15 uF																												
184	0.18 uF																												
224	0.22 uF																												
274	0.27 uF																												
334	0.33 uF																												
394	0.39 uF																												
474	0.47 uF																												
564	0.56 uF																												
684	0.68 uF																												
824	0.82 uF																												
105	1 uF																												
125	1.2 uF																												
155	1.5 uF																												
225	2.2 uF																												
335	3.3 uf																												
475	4.7 uF																												
685	6.8 uF																												
106	10 uF																												
226	22 uf																												
476	47 uF																												

Mechanical Specifications and Packaging Specifications

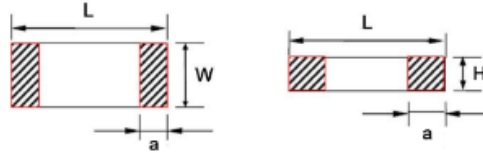


Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402X7R	10V - 50V	100 pF - 0.47 uF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603X7R	10V - 100V	150 pF - 2.2 uF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.006 0.80 ± 0.15	0.016 ± 0.008 0.40 ± 0.20	inches mm	4000	-
CML0805X7R	10V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 10 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	16V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
	25V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
		3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000

Mechanical Specifications and Packaging Specifications (cont.)

Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0805X7R	50V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	100V	100 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.020 0.70 ± 0.50	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		150 pF - 0.047 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.056 uF - 0.1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
CML1206X7R	10V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 22 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	16V - 25V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	50V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	100V	150 pF - 0.056 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.068 uF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.47 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000


Mechanical Specifications and Packaging Specifications (cont.)									
Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML1210X7R	10V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	16V - 25V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	50V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	100V	150 pF - 0.22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.055 ± 0.004 1.40 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.33 uF - 2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812X7R	16V - 25V	470 pF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		1.5 uF - 6.8 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	50V	470 pF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		1.5 uF - 4.7 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	100V	270 pF - 0.56 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		0.68 uF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.009 1.60 ± 0.24	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500

Environmental Characteristics									
Test	Test Specification						Test Condition		
Capacitance	Should be within the specified tolerance.						X7R: (Class II) Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Dissipation Factor (DF)	X7R (Class II)	X7R (≥ 0402)	≥ 50V ≤ 2.5%	25V ≤ 3.5% (C < 0.47uF) ≤ 10.0% (C ≥ 0.47uF)	16V ≤ 5% (C < 0.15uF) ≤ 10.0% (C ≥ 0.15 uF)	10V	Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Insulation Resistance	X7R (Class II)	C ≤ 25nF, Ri ≥ 10000M Ω C > 25nF, Ri*CR > 100S				Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA			
Dielectric Withstanding Voltage	No breakdown or damage.						Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.		
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.						Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds		
							Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds		
							Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds		
Resistance to Soldering Heat	Item	X7R					Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.		
	Δ C/C	-5 ~ + 10%							
	DF	Same to initial value							
	IR	Same to initial value							
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.								
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%						Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm 		
Termination Adhesion	No visible damage						Applied Force: 5 N Duration: 10 ± 1 seconds		
Temperature Cycle	X7R: Δ C/C: ≤ ± 10%						Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:		
							Step	Temp. (°C)	Time (min.)
							1	Low-category temp. X7R: -55°C	30 ± 3
							2	Normal temp. (+20°C)	2 - 3
							3	Up-category temp. X7R: +125°C	30 ± 3
							4	Normal temp. (+20°C)	2 - 3
							Recovery time after test: 24 ± 2 hours		

Environmental Characteristics (cont.)


Test	Test Specification	Test Condition
Moisture Resistance	X7R: $\Delta C/C: \leq \pm 10\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 1000M \Omega$ or $R_i^*CR \geq 25S$ whichever is smaller Appearance: No visible damage	Temperature: $40^\circ C \pm 2^\circ C$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Life Test	X7R: $\Delta C/C: \leq \pm 20\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 2000M \Omega$ or $R_i^*CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Low-voltage ($< 100V$) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: $125^\circ C$ (X7R) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Middle and High Voltage Life Test	X7R: $\Delta C/C: \leq \pm 20\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 2000M \Omega$ or $R_i^*CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Applied voltage: $100V \leq \text{rated voltage} < 500V$: 2 multiple $500V \leq \text{rated voltage} \leq 1000V$: 1.5 multiple $> 1000V$ rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: $125^\circ C$ (X7R) Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)

Reel Specifications

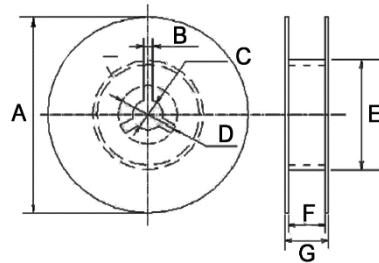

Type/Code	A	B	C	D	E	F	G	Unit
CML_X7R (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

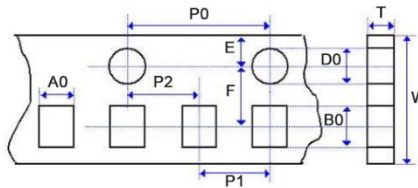


Type/Code	A0	B0	T	W	P0	Unit
CML0402X7R	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603X7R	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805X7R	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206X7R	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm

Paper Tape Specifications (cont.)

Type/Code	P1	P2	D0	E	F	Unit
CML0402X7R	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm


Plastic Tape Specifications

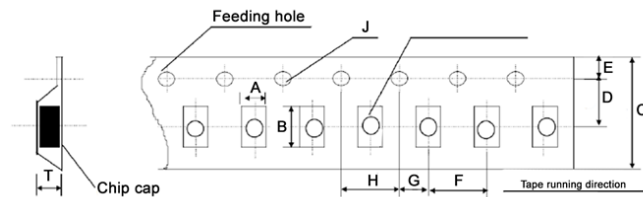

Type/Code	A	B	C	D	E	Unit
CML0805X7R	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206X7R	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210X7R	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812X7R	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812X7R	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

Recommended Solder Pad for Wave Soldering

Type	0603	0805	1206	1210	Unit
Length (L)	0.063 1.60	0.079 2.00	0.126 3.20	0.126 3.20	inches mm
Width (W)	0.031 0.80	0.049 1.25	0.063 1.60	0.098 2.50	inches mm
a	0.031 ~ 0.039 0.80 ~ 1.00	0.039 ~ 0.055 1.00 ~ 1.40	0.071 ~ 0.098 1.80 ~ 2.50	0.071 ~ 0.098 1.80 ~ 2.50	inches mm
b	0.020 ~ 0.031 0.50 ~ 0.80	0.031 ~ 0.059 0.80 ~ 1.50	0.031 ~ 0.067 0.80 ~ 1.70	0.031 ~ 0.067 0.80 ~ 1.70	inches mm
c	0.024 ~ 0.031 0.60 ~ 0.80	0.035 ~ 0.047 0.90 ~ 1.20	0.047 ~ 0.063 1.20 ~ 1.60	0.071 ~ 0.098 1.80 ~ 2.50	inches mm

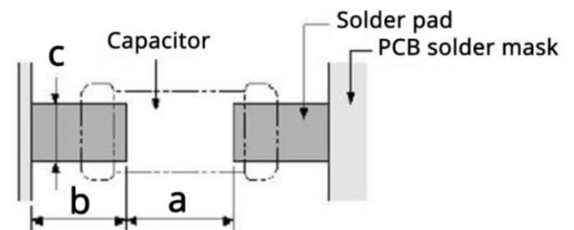

NOTE: Solder pad information is for reference only.

Recommended Solder Pad for Reflow Soldering

Type	0402	0603	0805	1206	1210	1812	Unit
Length (L)	0.043	0.063	0.079	0.126	0.126	0.177	inches
	1.10	1.60	2.00	3.20	3.20	4.50	mm
Width (W)	0.020	0.031	0.049	0.063	0.098	0.126	inches
	0.50	0.80	1.25	1.60	2.50	3.20	mm
a	0.018 ~ 0.022	0.024 ~ 0.031	0.031 ~ 0.047	0.071 ~ 0.098	0.071 ~ 0.098	0.098 ~ 0.138	inches
	0.45 ~ 0.55	0.60 ~ 0.80	0.80 ~ 1.20	1.80 ~ 2.50	1.80 ~ 2.50	2.50 ~ 3.50	mm
b	0.016 ~ 0.020	0.024 ~ 0.031	0.024 ~ 0.047	0.024 ~ 0.059	0.024 ~ 0.059	0.039 ~ 0.071	inches
	0.40 ~ 0.50	0.60 ~ 0.80	0.60 ~ 1.20	0.60 ~ 1.50	0.60 ~ 1.50	1.00 ~ 1.80	mm
c	0.018 ~ 0.022	0.024 ~ 0.031	0.035 ~ 0.063	0.047 ~ 0.079	0.071 ~ 0.126	0.091 ~ 0.138	inches
	0.45 ~ 0.55	0.60 ~ 0.80	0.90 ~ 1.60	1.20 ~ 2.00	1.80 ~ 3.20	2.30 ~ 3.50	mm

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/MM)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to "REACH"


We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy


It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

Features:

- 30°C to 85°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 1000 pF to 22 uF
- 100% RoHS compliant and lead free without exemption
- Halogen free
- REACH compliant



Construction



- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

Electrical Specifications

Type / Code	Dielectric Code	Standard Tolerance		Capacitance Range					
		Code	Description	10V	16V	25V	50V	100V	
CML0402	Y5V	Z	+80% / - 20%	1000 pF - 0.1 uF					-
				0.12 uF - 0.18 uF			-		
				0.12 uF - 0.47 uF		-			
				0.12 uF - 1 uF	-				
CML0603	Y5V	Z	+80% / - 20%	10000 pF - 0.1 uF					
				10000 pF - 0.82 uF					-
				0.18 uF - 2.2 uF			-		
CML0805	Y5V	Z	+80% / - 20%	0.012 uF - 0.1 uF					
				1 uF - 4.7 uF			-		
CML1206	Y5V	Z	+80% / - 20%	10000 pF - 1 uF					
				2.2 uF - 4.7 uF			-		
				10 uF		-			
CML1210	Y5V	Z	+80% / -						0.015 uF - 1 uF
CML1812	Y5V	Z	+80% / -						0.15 uF - 2.2 uF


Note: M = ±20% tolerance may be available

How to Order


C	M	L	0	4	0	2	Y	5	V	1	0	3	Z	T	5	0	V
Product Series		Size	Dielectric	Capacitance Range		Tolerance (*)		Packaging				Max Working Voltage					
Code	Description	Code	Code	0.1pF to 0.10uF (E6)		Code	Description	Code	Description	Size	Quantity						
CML	Multilayer Ceramic	0402	Y5V	EIA Code	Capacitance	M	± 20%	T	7" Paper Reel	Refer to Packaging Specifications							
		0603		102	1000 pF	Z	+80%/-20%		7" Plastic Tape								
		0805		103	0.01 uF												
		1206		104	0.1 uF												
		1210		105	1 uF												
		1812	106	10 uF													
												(*) Other tolerances may be available. Contact		10V			
														16V			
														25V			
														50V			
														100V			

Capacitance and Voltage Available																						
Dielectric		Y5V																				
EIA	Size	0402				0603					0805					1206					1210	1812
Code	VDCW	10V	16V	25V	50V	10V	16V	25V	50V	100	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V
102	1000 pF																					
122	1200 pF																					
152	1500 pF																					
182	1800 pF																					
222	2200 pF																					
272	2700 pF																					
332	3300 pF																					
392	3900 pF																					
472	4700 pF																					
562	5600 pF																					
682	6800 pF																					
822	8200 pF																					
103	0.01 uF																					
123	0.012 uF																					
153	0.015 uF																					
183	0.018 uf																					
223	0.022 uF																					
273	0.027 uF																					
333	0.033 uF																					
393	0.039 uF																					
473	0.047 uF																					
563	0.056 uF																					
683	0.068 uF																					
823	0.082 uF																					
104	0.1 uF																					
124	0.12 uF																					
154	0.15 uF																					
224	0.22 uF																					
334	0.33 uF																					
394	0.39 uF																					
474	0.47 uF																					
564	0.56 uF																					
684	0.68 uF																					
824	0.82 uF																					
105	1 uF																					
125	1.2 uF																					
135	1.3 uF																					
155	1.5 uF																					
225	2.2 uF																					
335	3.3 uF																					
475	4.7 uF																					
685	6.8 uF																					
106	10 uF																					
226	22 uF																					

Mechanical Specifications and Packaging Specifications

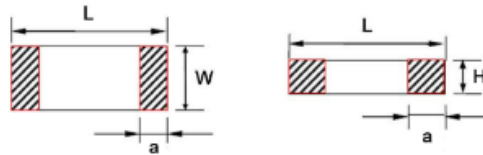


Type / Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402Y5V	10V - 50V	1000 pF - 1 uF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603Y5V	10V - 100V	1000 pF - 10 uF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.004 0.80 ± 0.09	0.012 ± 0.004 0.30 ± 0.10	inches mm	4000	-
CML0805Y5V	10V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.020 0.70 ± 0.50	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	16V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 10 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	25V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	50V	1000 pF - 0.22 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.33 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
	100V	0.01 uF - 0.1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.002 0.70 ± 0.05	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
CML1206Y5V	10V - 16V	1000 pF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		22 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
	25V	1000 pF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
	50V - 100V	1000 pF - 4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
CML1210Y5V	100V	0.015 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.039 ± 0.004 1.00 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812Y5V	100V	0.15 uF - 2.2 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000

Environmental Characteristics						
Test	Test Specification			Test Condition		
Capacitance	Should be within the specified tolerance.			Y5V: (Class II) Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%		
Dissipation Factor (DF)	Y5V (Class II)	≥ 25V ≤ 7% (C < 1uF) ≤ 9% (C ≥ 1uF)	16V ≤ 15%	10V ≤ 15%		
Insulation Resistance	Y5V (Class II)	C ≤ 25 nF, Ri ≥ 4,000 MΩ C > 25 nF, Ri*CR > 100 S		Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA		
Dielectric Withstanding Voltage	No breakdown or damage.			Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.		
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.			Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds		
				Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds		
				Solder Temperature: 245°C ± 5 °C (Lead-free) Duration: 2 ± 0.5 seconds		
Resistance to Soldering Heat	Item	Y5V		Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.		
	Δ C/C	-10 ~ +20%				
	DF	Same to initial value				
	IR	Same to initial value				
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.					
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%			Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm 		
Termination Adhesion	No visible damage			Applied Force: 5 N Duration: 10 ± 1 seconds		
Temperature Cycle	Y5V: Δ C/C: ≤ ± 20%			Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement Cycling times: 5 times, 1 cycle, 4 steps:		
				Step	Temp. (°C)	Time (min.)
				1	Low-category temp. Y5V: -25 °C	30 ± 3
				2	Normal temp. (+20°C)	2 - 3
				3	Up-category temp. Y5V: +85°C	30 ± 3
				4	Normal temp. (+20°C)	2 - 3
				Recovery time after test: 24 ± 2 hours		

Environmental Characteristics (cont.)


Test	Test Specification	Test Condition
Moisture Resistance	Y5V: $\Delta C/C: \leq \pm 30\%$ DF: Not more than twice of initial value. IR: Y5V: $R_i \geq 1000 \text{ M}\Omega$ or $R_i \cdot CR \geq 25 \text{ S}$ whichever is smaller Appearance: No visible damage	Temperature: $40^\circ\text{C} \pm 2^\circ\text{C}$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Life Test	Y5V: $\Delta C/C: \leq \pm 30\%$ DF: Not more than twice of initial value. IR: Y5V: $R_i \geq 2000 \text{ M}\Omega$ or $R_i \cdot CR \geq 50 \text{ S}$ whichever is smaller Appearance: No visible damage	Low-voltage (<100V) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: 85°C (Y5V) Charge/Discharge Current: 50mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Middle and High Voltage Life Test	Y5V: $\Delta C/C: \leq \pm 30\%$ DF: Not more than twice of initial value. IR: Y5V: $R_i \geq 2000 \text{ M}\Omega$ or $R_i \cdot CR \geq 50 \text{ S}$ whichever is smaller Appearance: No visible damage	Applied voltage: $100 \text{ V} \leq \text{rated voltage} < 500 \text{ V}$: 2 multiple $500 \text{ V} \leq \text{rated voltage} \leq 1000 \text{ V}$: 1.5 multiple $> 1000 \text{ V}$ rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: 85°C (Y5V) Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)

Reel Specifications



Type/Code	A	B	C	D	E	F	G	Unit
CML_Y5V (all sizes)	7.008 ± 0.079 178.00 ± 2.00	0.118 3.00	0.512 ± 0.020 13.00 ± 0.50	0.827 ± 0.031 21.00 ± 0.80	1.969 or more 50.00 or more	0.394 ± 0.059 10.00 ± 1.50	0.472 max 12.00 max	inches mm

Paper Tape Specifications

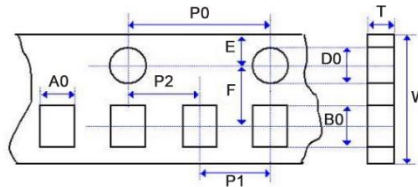


Type/Code	A0	B0	T	W	P0	Unit
CML0402Y5V	0.026 ± 0.004 0.65 ± 0.10	0.045 ± 0.004 1.15 ± 0.10	0.031 below 0.80 below	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0603Y5V	0.043 ± 0.004 1.10 ± 0.10	0.075 ± 0.004 1.90 ± 0.10	0.043 max 1.10 max	0.315 ± 0.004 8.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML0805Y5V	0.057 ± 0.006 1.45 ± 0.15	0.091 ± 0.006 2.30 ± 0.15	0.043 max 1.10 max	0.315 ± 0.006 8.00 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
CML1206Y5V	0.071 ± 0.008 1.80 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.043 max 1.10 max	0.315 ± 0.008 8.00 ± 0.20	0.157 ± 0.004 4.00 ± 0.10	inches mm

Paper Tape Specifications (cont.)

Type/Code	P1	P2	D0	E	F	Unit
CML0402Y5V	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603Y5V	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805Y5V	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206Y5V	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm


Plastic Tape Specifications

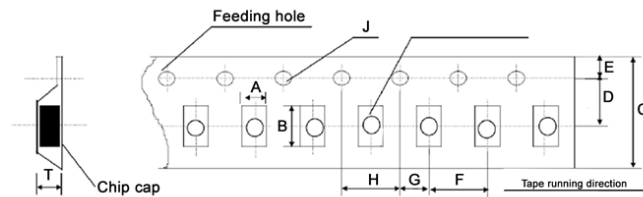

Type/Code	A	B	C	D	E	Unit
CML0805Y5V	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206Y5V	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210Y5V	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812Y5V	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805Y5V	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206Y5V	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210Y5V	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812Y5V	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

Recommended Solder Pad for Wave Soldering

Type	0603	0805	1206	1210	Unit
Length (L)	0.063 1.60	0.079 2.00	0.126 3.20	0.126 3.20	inches mm
Width (W)	0.031 0.80	0.049 1.25	0.063 1.60	0.098 2.50	inches mm
a	0.031 ~ 0.039 0.80 ~ 1.00	0.039 ~ 0.055 1.00 ~ 1.40	0.071 ~ 0.098 1.80 ~ 2.50	0.071 ~ 0.098 1.80 ~ 2.50	inches mm
b	0.020 ~ 0.031 0.50 ~ 0.80	0.031 ~ 0.059 0.80 ~ 1.50	0.031 ~ 0.067 0.80 ~ 1.70	0.031 ~ 0.067 0.80 ~ 1.70	inches mm
c	0.024 ~ 0.031 0.60 ~ 0.80	0.035 ~ 0.047 0.90 ~ 1.20	0.047 ~ 0.063 1.20 ~ 1.60	0.071 ~ 0.098 1.80 ~ 2.50	inches mm

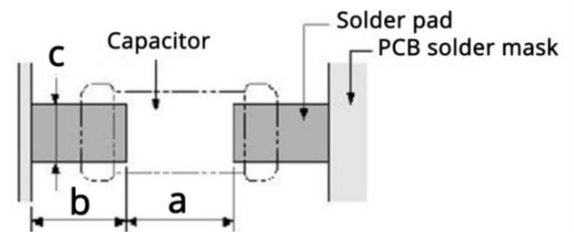

NOTE: Solder pad information is for reference only.

Recommended Solder Pad for Reflow Soldering

Type	0402	0603	0805	1206	1210	1812	Unit
Length (L)	0.043	0.063	0.079	0.126	0.126	0.177	inches
	1.10	1.60	2.00	3.20	3.20	4.50	mm
Width (W)	0.020	0.031	0.049	0.063	0.098	0.126	inches
	0.50	0.80	1.25	1.60	2.50	3.20	mm
a	0.018 ~ 0.022	0.024 ~ 0.031	0.031 ~ 0.047	0.071 ~ 0.098	0.071 ~ 0.098	0.098 ~ 0.138	inches
	0.45 ~ 0.55	0.60 ~ 0.80	0.80 ~ 1.20	1.80 ~ 2.50	1.80 ~ 2.50	2.50 ~ 3.50	mm
b	0.016 ~ 0.020	0.024 ~ 0.031	0.024 ~ 0.047	0.024 ~ 0.059	0.024 ~ 0.059	0.039 ~ 0.071	inches
	0.40 ~ 0.50	0.60 ~ 0.80	0.60 ~ 1.20	0.60 ~ 1.50	0.60 ~ 1.50	1.00 ~ 1.80	mm
c	0.018 ~ 0.022	0.024 ~ 0.031	0.035 ~ 0.063	0.047 ~ 0.079	0.071 ~ 0.126	0.091 ~ 0.138	inches
	0.45 ~ 0.55	0.60 ~ 0.80	0.90 ~ 1.60	1.20 ~ 2.00	1.80 ~ 3.20	2.30 ~ 3.50	mm

NOTE: Solder pad information is for reference only.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.