


Wirewound Resistors, Commercial Power, Radial Terminals



FEATURES

- Direct mounting on printed circuit board
- Circuit board lock-in mounting tabs
- High performance for low cost
- Meets or exceeds requirements of EIA Standard RS-344
- Special inorganic potting compound and ceramic case provide high thermal conductivity in a fireproof package

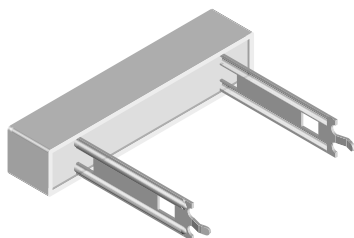

RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{40\text{ }^{\circ}\text{C}}$ W	RESISTANCE RANGE Ω $\pm 5\%, \pm 10\%$	WEIGHT (TYPICAL) g
CPR03	CPR-3	3	0.1 - 1K	5.6
CPR05	CPR-5	5	0.1 - 1K	6.6
CPR07	CPR-7	7	0.1 - 1.429K	9.4
CPR10	CPR-10	10	0.1 - 2K	10.0
CPR15	CPR-15	15	0.1 - 2K	20.3
CPR20	CPR-20	20	0.15 - 2.855K	25.6

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	CPR RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	± 600 below 1.0 Ω , ± 300 1.0 Ω and above
Short Time Overload	-	5 x rated power for 5 seconds
Terminal Strength	lb	10 minimum
Dielectric Withstanding Voltage	V_{AC}	1000
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Operating Temperature Range	$^{\circ}\text{C}$	- 65/+ 275

Note

- Wirewound CPR resistors can reliably function as a fuse and as a resistor. Such components involve compromise between fusing and resistive functions; therefore, each design should be tailored to the application to ensure optimum performance. Contact factory by using the e-mail address at the bottom of this page for design assistance.

GLOBAL PART NUMBER INFORMATION


New Global Part Numbering: CPR0515R00JE14 (preferred part number format)

C	P	R	0	5	1	5	R	0	0	J	E	1	4			
GLOBAL MODEL			VALUE			TOLERANCE			PACKAGING				SPECIAL			
CPR03 CPR05 CPR07 CPR10 CPR15 CPR20			R = Decimal K = Thousand R1500 = 0.15 Ω 1K500 = 1500 Ω			H = ± 3.0 % J = ± 5.0 % K = ± 10.0 %			E14 = Lead (Pb)-free bulk E31 = Lead (Pb)-free four layer bulk E10 = Lead (Pb)-free foam pack B14 = Tin/lead bulk B31 = Tin/lead four layer bulk F10 = Tin/lead foam pack				(Dash Number) (up to 3 digits) From 1 - 999 as applicable			

Historical Part Number example: CPR-5 15 Ω 5 % B14 (will continue to be accepted)

CPR-5	15 Ω	5 %	B14
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING

* Pb containing terminations are not RoHS compliant, exemptions may apply

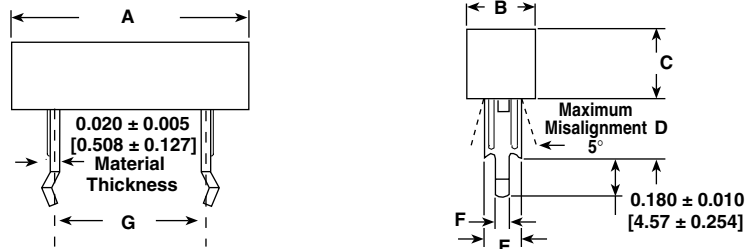DIMENSIONS in inches [millimeters]


GLOBAL MODEL	DIMENSIONS in inches [millimeters]						
	A ± 0.040 [1.02]	B ± 0.031 [0.787]	C ± 0.031 [0.787]	D + 0.080 [2.03] - 0.040 [1.02]	E ± 0.012 [0.305]	F ± 0.008 [0.203]	G ± 0.060 [1.52]
CPR03	0.906 [23.01]	0.375 [9.53]	0.375 [9.53]	0.394 [10.01]	0.287 [7.29]	0.055 [1.40]	0.500 [12.70]
CPR05	1.060 [26.92]	0.375 [9.53]	0.360 [9.14]	0.394 [10.01]	0.287 [7.29]	0.055 [1.40]	0.590 [14.99]
CPR07	1.398 [35.51]	0.375 [9.53]	0.360 [9.14]	0.984 [24.99]	0.287 [7.29]	0.055 [1.40]	0.886 [22.50]
CPR10	1.888 [47.96]	0.375 [9.53]	0.360 [9.14]	0.984 [24.99]	0.287 [7.29]	0.055 [1.40]	1.380 [35.05]
CPR15	1.888 [47.96]	0.500 [12.70]	0.500 [12.70]	1.180 [29.97]	0.394 [10.01]	0.106 [2.69]	1.280 [32.51]
CPR20	2.498 [63.45]	0.500 [12.70]	0.500 [12.70]	1.180 [29.97]	0.394 [10.01]	0.106 [2.69]	1.870 [47.50]

MATERIAL SPECIFICATIONS


Element: Copper-nickel alloy or nickel-chrome alloy, depending on resistance value

Core: Woven fiberglass

Body: Steatite ceramic case with inorganic potting compound

Terminals: Tin/lead plated CRS (Lead (Pb)-free will be 100 % tin)

Part Marking: DALE, Model, Wattage, Value, Tolerance, Date Code

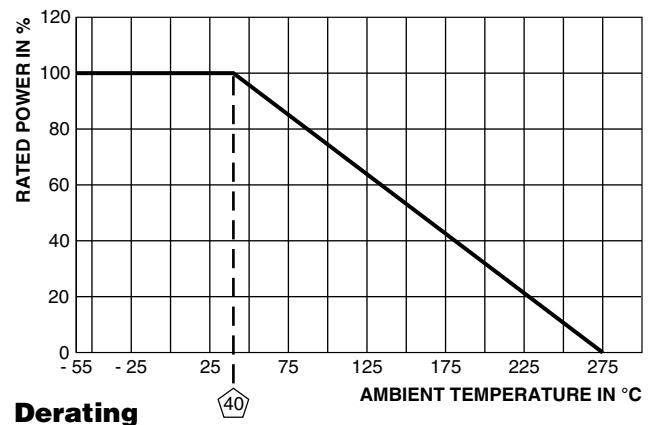

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS (EIA RS-344)
Thermal Shock	- 55 °C to + 275 °C, 5 cycles, 30 minute dwell time	± (5.0 % + 0.05 Ω) ΔR
Short Time Overload	5 x rated power for 5 seconds	± (4.0 % + 0.05 Ω) ΔR
Dielectric Withstanding Voltage	1000 Vrms for one minute	± (2.0 % + 0.05 Ω) ΔR
Low Temperature Operation	- 65 °C, full rated working voltage for 45 minutes	± (3.0 % + 0.05 Ω) ΔR
Humidity	75 °C, 90 % - 100 % RH, 240 hours	± (5.0 % + 0.05 Ω) ΔR
Load Life	1000 hours at rated power, + 40 °C, 1.5 hours "ON", 0.5 hours "OFF"	± (10.0 % + 0.05 Ω) ΔR
Terminal Strength	10 pounds in axial direction for 30 seconds	± (2.0 % + 0.05 Ω) ΔR
Resistance to Solder Heat	Terminal immersed 3.5 seconds in molten solder at 1/8" to 3/16" from body	± (4.0 % + 0.05 Ω) ΔR



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.