


Data Sheet

Chip Monolithic Ceramic Capacitors

Safety Standard Certified Type GF (IEC60384-14 Class Y2, X1/Y2)

GA352QR7GF102KW01L (2211, X7R, 1000pF, AC250V(r.m.s.))

RoHS regulation conformity parts

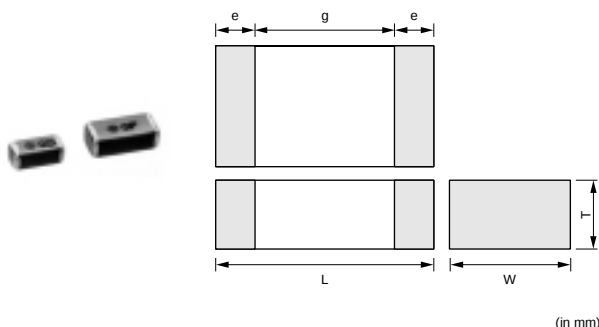

■ Dimensions

Length L	5.7mm±0.4mm
Width W	2.8mm±0.3mm
Thickness T	1.5mm+0/-0.3mm
Electrode e	0.3mm min.
Electrode g (min.)	4.0mm

■ Rated Value

	Murata PN Code	Spec
Temperature Char.	R7	X7R (EIA), ±15%
Capacitance	102	1000pF
Capacitance Tol.	K	±10%
Rated Voltage	GF	AC250V(r.m.s.)

■ Packaging

Code	Packaging	Minimum Quantity
L	180mm Embossed Tape	1000

■ Specifications

Please refer to
'Safety Standard Certified Type GC/GD/GF/GB
Specifications and Test Methods'
PDF file.

■ Standard Certification

	Standard No.	Class	Status of Certification		Rated Voltage
			Size : 4.5×2.0mm	Size : 5.7×2.8mm and over	
UL	UL1414	X1, Y2	—	⊙	AC250V (r.m.s.)
	UL 60950-1	—	⊙	—	
VDE	IEC 60384-14	X1, Y2	—	⊙	
SEMKO	EN 60384-14	Y2	⊙	⊙	

Applications

Size	Switching power supplies	Communication network devices such as a modem
4.5×2.0mm	—	⊙
5.7×2.8mm and over	⊙	⊙

● This data sheet is applied to SAFETY STANDARD CERTIFIED CHIP MONOLITHIC CERAMIC CAPACITOR Type GF for your design.

<Notice>

- Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.
- Please refer to 'Caution' and 'Notice' for the other details.

- The RoHS compliance means that we judge from EU Directive 2002/95/EC the products do not contain lead, cadmium, mercury, hexavalent chromium, PBB and PBDE, except exemptions stated in EU Directive 2002/95/EC annex and impurities existing in natural world.
- This statement does not insure the compliance of any of the listed parts with any laws or legal imperatives developed by any EU members individually with regards to the RoHS Directive.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.