


X7R Dielectric, KGM Series

General Specifications



The X7R dielectric is the most popular of the intermediate EIA class II materials due to its relative temperature stability. While the capacitance change is non-linear, temperature variation is within $\pm 15\%$ from -55°C to $+125^{\circ}\text{C}$.

Capacitance for X7R varies under the influence of electrical operating conditions such as voltage and frequency. X7R dielectric chip usage covers a broad spectrum of industrial applications where known changes in capacitance due to applied voltages are acceptable.

SpiCAT is an additional online resource that KAVX offers to help create engineering simulations. Please visit spicat.kyocera-avx.com for more information.







HOW TO ORDER

KGM	03	A	R7	1E	101	M	N
Series	Size	Thickness	Dielectric	Voltage	Capacitance Code Code (in pF)	Capacitance Tolerance	Packaging
General Purpose Tin/Nickel Finish	02= 0101 03= 0201 05= 0402 15= 0603 21= 0805 31= 1206	See Cap Chart	X7R = R7	0G= 4.0V 0J= 6.3V 1A= 10V 1C= 16V 1E= 25V	2 Significant Digits +Number of zeros eg. $10\mu\text{F} = 106$ $10\text{nF} = 103$ $47\text{pF} = 470$	J* = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$	See Table Below
	32=1210 43=1812 44=1825 55=2220 56=2225			1H=50V 2A= 100V 2D= 200V 2E=250V 2H=500V			



PACKAGING CODES

Code	EIA (inch)	IEC(mm)	7" Paper	7" Embossed	13" Paper	13" Embossed
02	0101	0402				
03	0201	0603	H		N	
05	0402	1005	H		N	
15	0603	1608	T	U	M	L
21	0805	2012	T	U	M	L
31	1206	3216	T	U	M	L
32	1210	3225		U		L
43	1812	4532		V		S
44	1825	4564		V		S
55	2220	5750		V		S
56	2225	5763		V		S

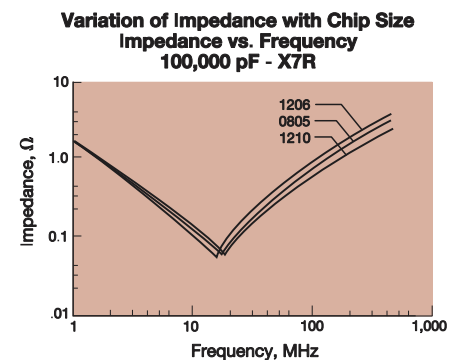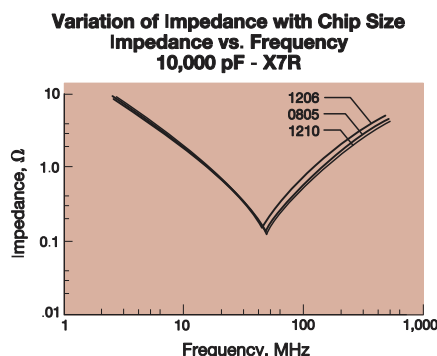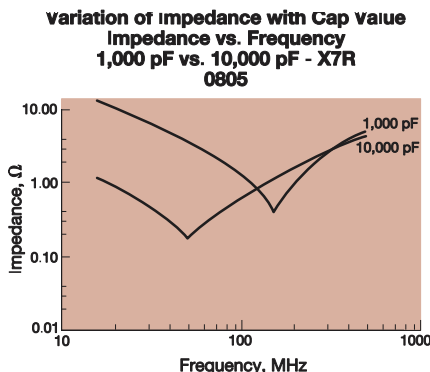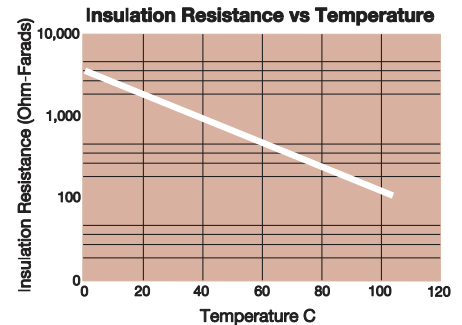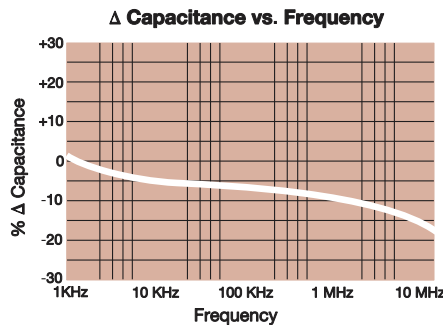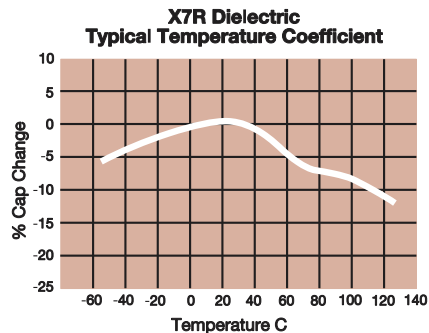

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TDS-SMDMLCC-0038 | Rev 1

– SURFACE MOUNT CERAMIC CAPACITOR PRODUCTS –

X7R Dielectric, KGM Series


Specifications and Test Methods



Parameter/Test		X7R Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +125°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz $\pm$ 10% Voltage: 1.0Vrms $\pm$.2V For Cap > 10 μ F, 0.5Vrm @ 120Hz	
Dissipation Factor		$\leq$ 10% for $\geq$ 50V DC ratings $\leq$ 12.5% for 25V DC rating $\leq$ 12.5% for 25V and 16V DC rating $\leq$ 12.5% for $\leq$ 10V DC rating Contact Factory for DF by PN		
Insulation Resistance		10,000M Ω or 500M Ω - μ F, whichever is less	Charge device with rated voltage for 120 $\pm$ 5 secs @ room temp/humidity	
Dielectric Strength		No breakdown or visual defects	Charge device with 250% of rated voltage for 1-5 seconds, w/ charge and discharge current limited to 50 mA (max) Note: Charge device with 150% of rated voltage for 500V devices.	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds	
	Capacitance Variation	$\leq \pm 12\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	$\geq$ Initial Value x 0.3		
Solderability		$\geq$ 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 $\pm$ 5°C for 5.0 $\pm$ 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 $\pm$ 2 hours before measuring electrical properties.	
	Capacitance Variation	$\leq \pm 7.5\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55°C $\pm$ 2°	30 $\pm$ 3 minutes
	Capacitance Variation	$\leq \pm 7.5\%$	Step 2: Room Temp	$\leq$ 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +125°C $\pm$ 2°	30 $\pm$ 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	$\leq$ 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 $\pm$ 2 hours at room temperature	
Load Life	Appearance	No visual defects	Pre-treatment: After mounting, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	$\leq$ Initial Value x 2.0 (See Above)	Charge device with $\geq$ rated voltage in test chamber set at 125°C $\pm$ 2°C for 1000 hours (+48, -0).	
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)	Pre-treatment: After remove from test chamber, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure.	
	Dielectric Strength	Meets Initial Values (As Above)	Contact KYOCERA AVX for datasheet of specific parts.	
Load Humidity	Appearance	No visual defects	Pre-treatment: After mounting, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	$\leq$ Initial Value x 2.0 (See Above)	Store in a test chamber set at 85°C $\pm$ 2°C/ 85% $\pm$ 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied.	
	Insulation Resistance	$\geq$ Initial Value x 0.3 (See Above)	Pre-treatment: After remove from test chamber, perform heat treatment 150+0/-10C for 2 hour, then stabilise for 24+/-2 hour at room temp, then measure.	
	Dielectric Strength	Meets Initial Values (As Above)		

X7R Dielectric, KGM Series

Capacitance Range



SIZE	0101*		0201				0402					0603					0805					1206							
Soldering	Reflow Only		Reflow Only				Reflow/Wave					Reflow/Wave					Reflow/Wave					Reflow/Wave							
Packaging	Paper		All Paper				All Paper					Paper/Embossed					Paper/Embossed					Paper/Embossed							
(L) Length	mm (in.)	0.40 ± 0.02 (0.016 ± 0.0008)	0.60 ± 0.03 (0.024 ± 0.001)				1.00 ± 0.10 (0.040 ± 0.004)					1.60 ± 0.15 (0.063 ± 0.006)					2.01 ± 0.20 (0.079 ± 0.008)					3.20 ± 0.30 (0.126 ± 0.012)							
(W) Width	mm (in.)	0.20 ± 0.02 (0.008 ± 0.0008)	0.30 ± 0.03 (0.011 ± 0.001)				0.50 ± 0.10 (0.020 ± 0.004)					0.81 ± 0.15 (0.032 ± 0.006)					1.25 ± 0.20 (0.049 ± 0.008)					1.60 ± 0.30 (0.063 ± 0.012)							
(t) Terminal	mm (in.)	0.10± 0.04 (0.004 ± 0.0016)	0.15 ± 0.05 (0.006 ± 0.002)				0.25 ± 0.15 (0.010 ± 0.006)					0.35 ± 0.15 (0.014 ± 0.006)					0.50 ± 0.25 (0.020 ± 0.010)					0.50 ± 0.25 (0.020 ± 0.010)							
WVDC	16	6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	500
Cap	100 101	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B								
(pF)	150 151	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B								
	220 221	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	330 331	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	470 471	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	680 681	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	1000 102	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	1500 152		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	2200 222		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	N	N	N
	3300 332		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	3900 392		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	4700 472		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	5600 562		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	6800 682		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
Cap	0.01 103		A	A	A	A		A	A	A	A	A	A	A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
(μF)	0.012 123							A	A	A	A	C		A	A	A	A	A	A	B	B		N	N	N	N	N	A	A
	0.015 153							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.018 183							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.022 223		A	A	A			A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.027 273							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.033 333							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.039 393							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.047 473							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.068 683							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.082 823							A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.1 104		A					A	A	A	A	C		A	A	A	A	A	A	B	B	N	N	N	N	N	A	A	B
	0.12 124							A	A	A	A			A	A	A	A	A	A	B	B	N	N	N	N	E	A		B
	0.15 154							A	A	A	A			A	A	A	A	B	B			E	E	E	E	A		V	
	0.22 224							A	A	A	A			A	B	B	B	B				A	A	A	A	A		V	
	0.33 334													B	B	B	B	B				A	A	A	A	A		V	
	0.47 474							A	A					B	B	B	B	B				A	A	A	A	A		H	
	0.68 684													B	B	B	B					A	A	A	A	A		H	
	1.0 105							A	A					B	B	B	B	C				A	A	A	A	A		H	
	2.2 225													B	B	C						A	A	A	A			H	
	4.7 475													C								A	A	A				H	
	10 106																					A	A					H	
	22 226																											H	
	47 476																												
	100 107																												
WVDC	16	6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	500
SIZE	0101*	0201				0402					0603					0805					1206								


Case Size	0101 (KGM 02)	0201 (KGM03)	0402 (KGM05)		0603 (KGM15)			0805 (KGM21)			1206 (KGM31)							
Thickness Letter	A	A	A	C	A	B	C	A	E	N	A	B	D	H	M	P	T	M
Max Thickness (mm)	0.22	0.33	0.55	0.70	0.90	0.95	1.00	1.45	1.35	1.00	1.80	0.94	1.45	1.90	1.25	1.40	1.35	1.25
Carrier Tape	PAPER	PAPER	PAPER		PAPER	PAPER	PAPER	EMB	EMB	PAPER	EMB	PAPER	EMB	EMB	EMB	EMB	EMB	EMB
Packaging Code 7*reel	H	H	H	H	T	T	T	U	U	T	U	T	U	U	U	U	U	U
Packaging Code 13*reel	n/a	N	N	N	M	M	M	L	L	M	L	M	L	L	L	L	L	L
	PAPER							EMBOSSED (EMB)										

X7R Dielectric, KGM Series

Capacitance Range



SIZE	1210							1812							1825			2220					2225							
Soldering	Reflow Only							Reflow Only							Reflow Only			Reflow Only					Reflow Only							
Packaging	Paper/Embossed							All Embossed							All Embossed			All Embossed					All Embossed							
(L) Length	mm	3.30 ± 0.4 (0.130± 0.016)							mm	4.50 ± 0.40 (0.177 ± 0.016)							mm	4.50 ± 0.40 (0.177 ± 0.016)			mm	5.70 ± 0.50 (0.224 ± 0.020)					mm	5.70 ± 0.40 (0.224 ± 0.016)		
(W) Width	mm	2.50 ± 0.30 (0.098 ± 0.012)							mm	3.20 ± 0.40 (0.126 ± 0.016)							mm	6.40 ± 0.40 (0.252 ± 0.016)			mm	5.00 ± 0.40 (0.197 ± 0.016)					mm	6.30 ± 0.40 (0.248 ± 0.016)		
(t) Terminal	mm	0.50 ± 0.25 (0.020 ± 0.010)							mm	0.61 ± 0.36 (0.024 ± 0.014)							mm	0.61 ± 0.36 (0.024 ± 0.014)			mm	0.64 ± 0.39 (0.025 ± 0.015)					mm	0.64 ± 0.39 (0.025 ± 0.015)		
WVDC	10	16	25	50	100	200	500	16	25	50	100	200	500	50	100	200	25	50	100	200	500	50	100	200						
Cap 100	101																													
(pF) 150	151																													
220	221	R	R	R	R	R	R	D																						
330	331	R	R	R	R	R	R	D	A	A	A	A	A	A																
470	471	R	R	R	R	R	R	D	A	A	A	A	A	A	A															
680	681	R	R	R	R	R	R	D	A	A	A	A	A	A	A															
1000	102	R	R	R	R	R	R	D	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
1500	152	R	R	R	R	R	R	D	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
2200	222	R	R	R	R	R	R	D	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
3300	332	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
3900	392	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
4700	472	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
5600	562	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
6800	682	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
Cap 0.010	103	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
(μF) 0.012	123	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.015	153	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.018	183	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.022	223	R	R	R	R	R	R	E	A	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.027	273	R	R	R	R	R	R	E	H	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.033	333	R	R	R	R	R	R	E	H	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.039	393	R	R	R	R	R	R	E	H	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.047	473	R	R	R	R	R	R	E	H	A	A	A	A	B	C	C	C	Z	Z	Z	Z	Z	D	D	D					
0.068	683	R	R	R	R	R	R	H	P	A	A	A	A	B	F	C	C	C	Z	Z	Z	Z	D	D	D					
0.082	823	R	R	R	R	R	R	H	P	A	A	A	A	B	F	C	C	C	Z	Z	Z	Z	D	D	D					
0.100	104	R	R	R	R	R	R	H	P	A	A	A	B	B	F	C	C	C	Z	Z	Z	Z	D	D	D					
0.120	124	R	R	R	R	R	R	H		A	A	A	B	B	J	C	C	C	Z	Z	Z	Z	D	D	D					
0.150	154	E	E	E	E	E	L			A	A	A	B	F	J	C	C	C	Z	Z	Z	Z	D	D	D					
0.220	224	E	E	E	E	E	L			A	A	A	B	F	J	C	C	C	Z	Z	Z	Z	D	D	D					
0.330	334	E	E	E	E	H	L			A	A	A	B	F	J	C	C	C	Z	Z	Z	Z	D	D	D					
0.470	474	E	E	E	E	L	L			A	A	A	F	F	J	C	C	C	Z	Z	Z	Z	D	D	D					
0.680	684	E	E	E	E	L	L			F	F	F	F	J		C	C	C	Z	Z	Z	Z	C	D	D	D				
1.000	105	E	E	E	E	L				F	F	F	F	J		C	C	C	Z	Z	Z	Z	D	D	D	D				
2.200	225	L	L	L	L	L				F	F	F	J			C	C	F	Z	Z	Z	C		D	D	G				
4.700	475	L	L	L	L					J	J	J	J			C	F		Z	Z	Z			D	G					
10	106	L	L	L	L					J	J	J				F	F		C	C	C			G	G					
22	226	L	L	L															D											
47	476	L																												
100	107																													
WVDC		10	16	25	50	100	200	500	16	25	50	100	200	500	50	100	200	25	50	100	200	500	50	100	200					
SIZE		1210							1812							1825			2220					2225						



Case Size	1210 (KGM 32)							1812 (KGM 43)				1825 (KGM 44)		2220 (KGM 55)			2225 (KGM56)	
Thickness Letter	D	E	H	L	P	R		A	B	F	J	C	F	D	C	Z	D	G
Max Thickness (mm)	1.4	1.45	1.8	2.80	2.2	1.05		1.4	1.45	2.21	2.80	2.21	2.80	3.3	2.80	2.21	2.21	2.80
Carrier Tape	EMB	EMB	EMB	EMB	EMB	EMB		EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB
Packaging Code 7"reel	U	U	U	U	U	U		V	V	V	V	V	V	V	V	V	V	V
Packaging Code 13"reel	L	L	L	L	L	L		S	S	S	S	S	S	S	S	S	S	S
EMBOSSED(EMB)																		