LFWLT200-CK COVER KIT

Features

- Noncorrosive
- Easy assembly
- Low weight
- Fully safe



FOR WLT200, MWLT200 SERIES

Derating Guidelines

WLT200/MWLT200: De-rate to 70% of values mentioned in temperature de-rating curves of open frame models at all load and ambient conditions.

Contents

Mounting Base, Cover, Insulator, Fixing Screws

Mechanical Dimensions

Cover and Base Material	EG(Zintec)/CRCA/GI 1.0mm thick (Powder coating/ Passivation/ ED coating black)
Marked	A: PCB MTG; B: COVER MTG; C: SYSTEM MTG, M3 Thread

All dimensions are in mm. General tolerance : +/−1.0

Mechanical Drawing

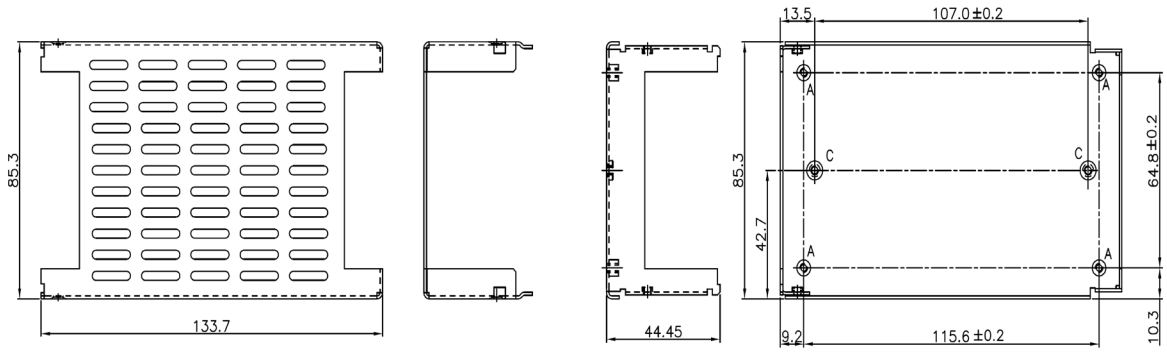

	PARTS	DETAIL	QTY	LOCATION
1	COVER KIT BASE	SCREW,PNHD,M3x6MM	4 NOS	AT "A"
2	COVER KIT TOP COVER	SCREW,CSK M3x6MM,130DEG	2 NOS	AT "B"
3*	INSULATOR MYLAR MYLAR M031	TO BE PLACED UNDER THE PSU IN CK	1 NO	BETWEEN PCB & CK BASE
4	SYSTEM MTG (NOT SUPPLIED WITH COVER KIT)	SCREW THREAD M3x0.5 3.0 MM MAX.PENETRATION	2 NOS	AT "C"

*ITEM NO 3 PART DETAILS.

MANUFACTURER	MPN	DESCRIPTION
DUPONT TEIJIN FILMS USLP	MYLAR M031	POLYETHYLENE TERPHTHALTE(PET)MYLAR MIN THK 0.25MM,VTM−2

WLT200 & WLT300.
MECHANICAL OUTLINE DIMENSIONS.

Innovations in Power

Please read our datasheet & drawing disclaimer here.