



M300 Connectors

Female PC Tail

- ❑ 4-finger Beryllium Copper contact.
- ❑ Positive keyway polarisation features.
- ❑ 10A current capacity, resists high vibration and shock.
- ❑ Withstands extremes of temperature: -65°C to +175°C.
- ❑ Scoop-proof contacts.
- ❑ No. 1 position ident on housing.

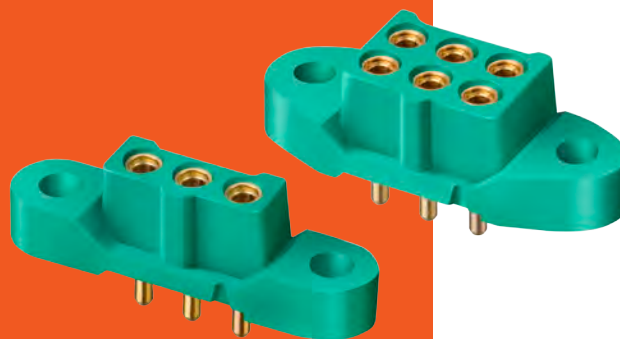


SINGLE ROW

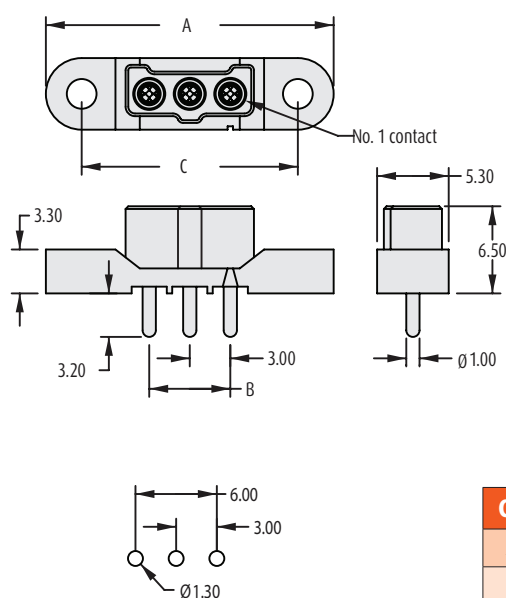

Recommended PC Board Pattern

DOUBLE ROW

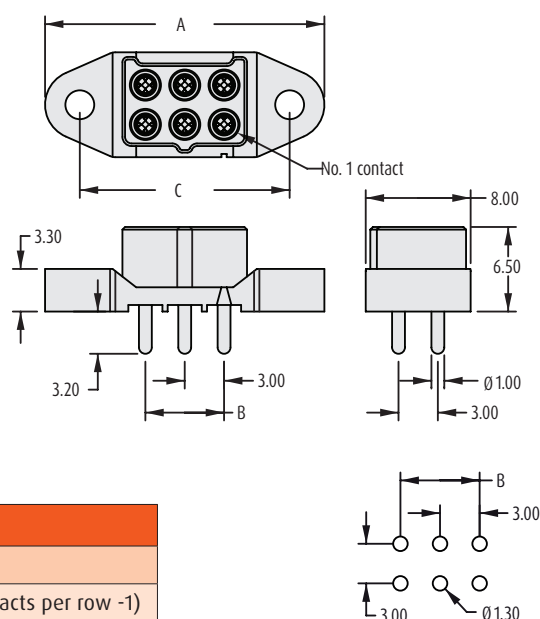

Recommended PC Board Pattern

CALCULATION

A	$B + 15.3$
B	$3 \times (\text{No. of contacts per row} - 1)$
C	$B + 10$

HOW TO ORDER

M300 - F VX XX 45 00

SERIES CODE

GENDER

F Female

TYPE

V1 Single Row
V3 Double Row

TYPE

00 No Jackscrew

FINISH

45 Gold

TOTAL NO. OF CONTACTS

03 Single Row
06, 10 Double Row

All dimensions in mm.