
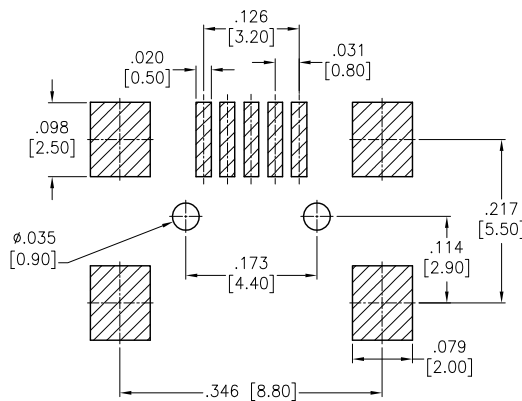

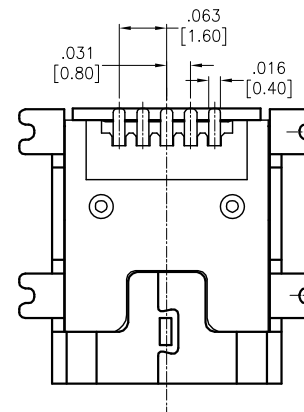
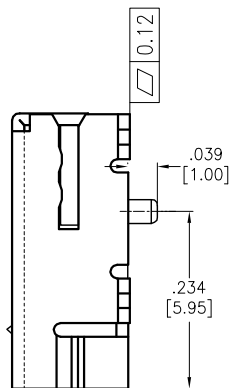


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/10/06	
A		ADDED SHT 2, TAPE & REEL SPEC	12/6/06	
B		REDRAWN	7/24/14	AY/GC
C		UPDATE SPEC.	6/21/16	AY/NC

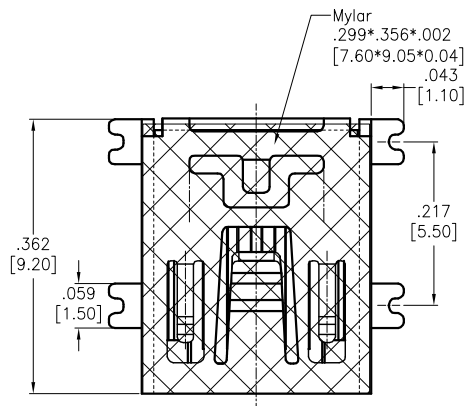

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on solder tails

Electrical:

Voltage rating: 30 VAC.

Current rating: 1 Amp.

Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 100 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +60°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
		TITLE MINI USB, TYPE B, 5 pin, SINGLE PORT RIGHT ANGLE, SMT, TAPE AND REEL			
		SIZE X	PART NO. MUSB-B5-S-RA-SMT-PP-T/R	REV. C	
		REF: S00005C	SCALE: NTS	SHEET 1 OF 2	
APPROVALS		DATE			
DRAWN	SS	10/4/04			
CHECKED					
APPROVED					

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

SEE SHT 1 OF 2 FOR REVISION

D

D

C





C

B

B

A

A

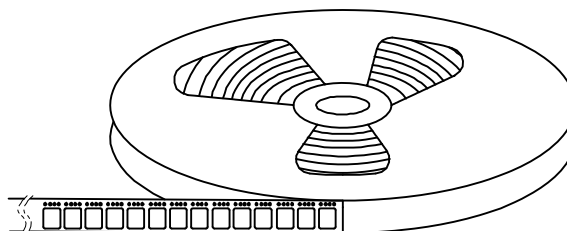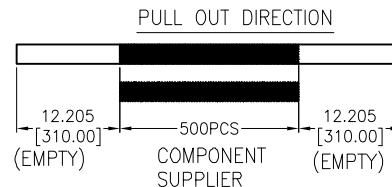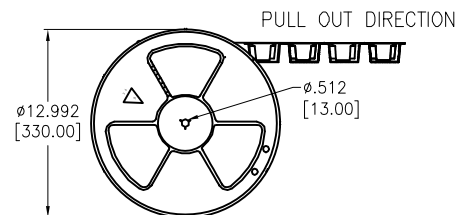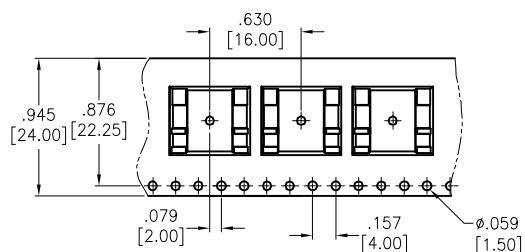

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

SS

10/4/04

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MINI USB, TYPE B, 5 pin, SINGLE PORT
RIGHT ANGLE, SMT, TAPE AND REEL

SIZE
X

PART NO.

MUSB-B5-S-RA-SMT-PP-T/R

REV.
C

REF: S00005C

SCALE: NTS

SHEET 2 OF 2

6

5

4

3

2

1