

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Features:

- RMEF – standard power ratings
- RMEP – high power ratings
- Nickel barrier terminations standard
- Power derating from 100% at 70°C to zero at +155°C
- RoHS compliant, REACH compliant, lead free, and halogen free
- AEC-Q200 compliant



## Electrical Specifications - RMEF

Type/Code	Power Rating (W) @ 70°C	Max. Working Voltage (V)	Max. Overload Voltage (V)	Max. Jumper Current (A)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance <sup>(1)</sup>	
						1%	5%
RMEF0402	0.063	50	100	1	± 400	1 - 9.76	
					± 100	10 - 10M	
RMEF0603	0.1	75	150	1	± 100	1 - 10M	
RMEF0805	0.125	150	300	2	± 100	1 - 10M	
RMEF1206	0.25	200	400	2	± 100	1 - 10M	
RMEF1210	0.5			3	± 100	1 - 10M	
RMEF1812	0.75			3	± 100	1 - 10M	
RMEF2010	0.75			3	± 100	1 - 10M	
RMEF2512	1			3	± 100	1 - 10M	

(1) Tighter tolerances available. Contact Stackpole Electronics.  
Operating temperature range is -55 to +155°C

## Electrical Specifications - RMEP

Type/Code	Power Rating (W) @ 70°C	Max. Working Voltage (V)	Max. Overload Voltage (V)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance	
					0.1%, 0.5%	1%, 5%, 10%
RMEP0402	0.1	50	100	± 400	-	1 - 9.76
				± 250	1 - 97.6K	10 - 97.6K
				± 100	100K - 1M	100K - 30M
RMEP0603	0.125	75	150	± 100	-	1 - 9.76
				± 250	1 - 97.6K	10 - 97.6K
				± 100	100K - 1M	100K - 30M
RMEP0805	0.25	150	300	± 100	-	1 - 9.76
				± 200	1 - 97.6K	10 - 97.6K
				± 100	100K - 1M	100K - 30M
RMEP1206	0.5	200	400	± 100	-	1 - 9.76
				± 200	1 - 97.6K	10 - 97.6K
				± 100	100K - 1M	100K - 30M
RMEP1210	0.66			± 100	-	1 - 9.76
				± 200	1 - 97.6K	10 - 97.6K
				± 100	100K - 1M	100K - 30M
RMEP1812	1			± 100	-	1 - 9.76
				± 200	1 - 97.6K	10 - 97.6K
				± 100	100K - 1M	100K - 10M
RMEP2010	1			± 100	-	1 - 9.76
		± 200	1 - 97.6K	10 - 97.6K		
		± 100	100K - 1M	100K - 30M		
RMEP2512	2	± 100	-	1 - 9.76		
		± 200	1 - 97.6K	10 - 97.6K		
		± 100	100K - 1M	100K - 30M		

Operating temperature range is -55 to +155°C

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions


## Jumper Electrical Specifications – RMEF

Type/Code	Max Overload Current (A) <1 second and 1 time	Jumper Resistance Value (Ω)
RMEF0402	3	0.05 Max.
RMEF0603		
RMEF0805		
RMEF1206	10	
RMEF1210		
RMEF2010		
RMEF2512		

## Jumper Electrical Specifications - RMEP

Type/Code	Max Overload Current (A) <1 second and 1 time	Jumper Rated Current (A)	Jumper Resistance Value (Ω)
RMEP0402	6	1.8	0.02 Max.
RMEP0603	9	2.5	
RMEP0805	13	3.5	
RMEP1206	16	4.4	
RMEP1210	19	5.2	
RMEP1812	22	6	
RMEP2010	22	6	
RMEP2512	30	8	

## Mechanical Specifications - RMEF

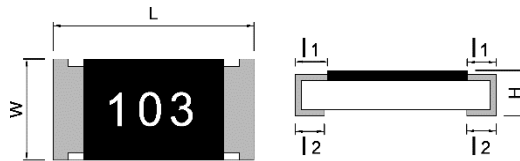


Type/Code	L	W	H	l <sub>1</sub>	l <sub>2</sub>	Unit
RMEF0402	0.039 ± 0.0039	0.020 ± 0.0020	0.012 ± 0.0020	0.006 ± 0.004	0.008 ± 0.004	inches
	1.00 ± 0.10	0.50 ± 0.05	0.30 ± 0.05	0.15 ± 0.10	0.20 ± 0.10	mm
RMEF0603	0.063 ± 0.008	0.031 ± 0.006	0.016 ± 0.004	0.012 ± 0.008	0.012 ± 0.004	inches
	1.60 ± 0.20	0.80 ± 0.15	0.40 ± 0.10	0.30 ± 0.20	0.30 ± 0.10	mm
RMEF0805	0.079 ± 0.008	0.049 ± 0.006	0.020 ± 0.006	0.012 ± 0.006	0.016 ± 0.006	inches
	2.00 ± 0.20	1.25 ± 0.15	0.50 ± 0.15	0.30 ± 0.15	0.40 ± 0.15	mm
RMEF1206	0.120 ± 0.004	0.063 ± 0.008	0.022 ± 0.006	0.016 ± 0.008	0.020 ± 0.008	inches
	3.05 ± 0.10	1.60 ± 0.20	0.55 ± 0.15	0.40 ± 0.20	0.50 ± 0.20	mm
RMEF1210	0.120 ± 0.004	0.098 ± 0.008	0.022 ± 0.006	0.020 ± 0.008	0.020 ± 0.008	inches
	3.05 ± 0.10	2.50 ± 0.20	0.55 ± 0.15	0.50 ± 0.20	0.50 ± 0.20	mm
RMEF1812	0.177 ± 0.004	0.122 ± 0.008	0.022 ± 0.002	0.022 ± 0.008	0.028 ± 0.008	inches
	4.50 ± 0.10	3.10 ± 0.20	0.55 ± 0.05	0.55 ± 0.20	0.70 ± 0.20	mm
RMEF2010	0.197 ± 0.008	0.098 ± 0.008	0.022 ± 0.004	0.024 ± 0.008	0.024 ± 0.008	inches
	5.00 ± 0.20	2.50 ± 0.20	0.55 ± 0.10	0.60 ± 0.20	0.60 ± 0.20	mm
RMEF2512	0.248 ± 0.008	0.126 ± 0.008	0.022 ± 0.004	0.024 ± 0.008	0.024 ± 0.008	inches
	6.30 ± 0.20	3.20 ± 0.20	0.55 ± 0.10	0.60 ± 0.20	0.60 ± 0.20	mm

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Mechanical Specifications - RMEP

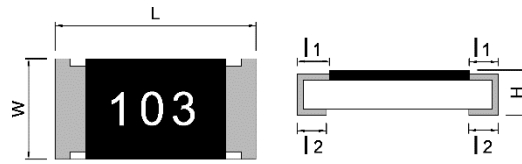

Type/Code	L	W	H	l <sub>1</sub>	l <sub>2</sub>	Unit
RMEP0402	0.039 ± 0.0020	0.020 ± 0.0020	0.012 ± 0.0020	0.006 ± 0.004	0.008 ± 0.004	inches
	1.00 ± 0.05	0.50 ± 0.05	0.30 ± 0.05	0.15 ± 0.10	0.20 ± 0.10	mm
RMEP0603	0.063 ± 0.004	0.031 ± 0.004	0.016 ± 0.004	0.012 ± 0.008	0.012 ± 0.004	inches
	1.60 ± 0.10	0.80 ± 0.10	0.40 ± 0.10	0.30 ± 0.20	0.30 ± 0.10	mm
RMEP0805	0.079 ± 0.004	0.049 ± 0.004	0.020 ± 0.006	0.012 ± 0.006	0.016 ± 0.006	inches
	2.00 ± 0.10	1.25 ± 0.10	0.50 ± 0.15	0.30 ± 0.15	0.40 ± 0.15	mm
RMEP1206	0.120 ± 0.004	0.063 ± 0.004	0.022 ± 0.006	0.016 ± 0.008	0.020 ± 0.008	inches
	3.05 ± 0.10	1.60 ± 0.10	0.55 ± 0.15	0.40 ± 0.20	0.50 ± 0.20	mm
RMEP1210	0.120 ± 0.004	0.098 ± 0.006	0.022 ± 0.006	0.020 ± 0.008	0.020 ± 0.008	inches
	3.05 ± 0.10	2.50 ± 0.15	0.55 ± 0.15	0.50 ± 0.20	0.50 ± 0.20	mm
RMEP1812	0.177 ± 0.004	0.122 ± 0.006	0.022 ± 0.006	0.022 ± 0.008	0.028 ± 0.008	inches
	4.50 ± 0.10	3.10 ± 0.15	0.55 ± 0.15	0.55 ± 0.20	0.70 ± 0.20	mm
RMEP2010	0.197 ± 0.004	0.098 ± 0.006	0.022 ± 0.006	0.024 ± 0.008	0.024 ± 0.008	inches
	5.00 ± 0.10	2.50 ± 0.15	0.55 ± 0.15	0.60 ± 0.20	0.60 ± 0.20	mm
RMEP2512	0.248 ± 0.004	0.126 ± 0.006	0.026 ± 0.006	0.024 ± 0.012	0.024 ± 0.012	inches
	6.30 ± 0.10	3.20 ± 0.15	0.65 ± 0.15	0.60 ± 0.30	0.60 ± 0.30	mm

## Performance Characteristics

Test	Test Method	Procedure	Requirements
Temperature Coefficient of Resistance (TCR)	JIS-C-5201-1 4.8 IEC-60115-1 4.8	At 25/-55°C and 25°C/+155°C, 25°C is the reference temperature	As per specification
RMEF Short Time Overload	JIS-C-5201-1 4.13 IEC-60115-1 4.13	2.5 times RCWV or Max. overload voltage whichever is less for 5 seconds. Jumper: Overload current for 5 seconds 0402/0603/0805 = 2.5A 1206/1210/1812/2010/2512 = 5A	1%: ± (1 + 0.05Ω) 5%: ± (2% + 0.1Ω) Jumper: Max 0.05Ω after test
RMEP Short Time Overload	JIS-C-5201-1 4.13 IEC-60115-1 4.13	2.5 times RCWV or Max. overload voltage whichever is less for 2 seconds. Jumper: Overload current for 5 seconds 0402=13A, 1812=15A, 2010=15A, 2512=20A	1% and below: ± (1 + 0.05Ω) 5%: ± (2% + 0.1Ω) Jumper: Max 0.02Ω after test
Leaching	JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1	260 ± 5°C for 30 seconds	Individual leaching area ≤ 5% Total leaching area ≤ 10%
RMEF Resistance to Soldering Heat	JIS-C-5201-1 4.18 IEC-60115-1 4.18	260 ± 5°C for 10 seconds	1%: ± (0.5% + 0.05Ω) 5%: ± (1% + 0.05Ω)
RMEP Resistance to Soldering Heat	JIS-C-5201-1 4.18 IEC-60115-1 4.18	260 ± 5°C for 10 seconds	1% and below: ± (0.5% + 0.05Ω) 5%: ± (1% + 0.05Ω)
RMEF Rapid Change of Temperature	JIS-C-5201-1 4.19 IEC-60115-1 4.19	-55°C to +155°C, 5 cycles	1%: ± (0.5% + 0.05Ω) 5%: ± (1% + 0.05Ω)
RMEP Rapid Change of Temperature	JIS-C-5201-1 4.19 IEC-60115-1 4.19	-55°C to +155°C, 5 cycles	1% and below: ± (0.5% + 0.05Ω) 5%: ± (1% + 0.1Ω)
RMEF Resistance to Solvent	JIS-C-5201-1 4.29	The tested resistor is immersed into isopropyl alcohol of 20~25°C for 60 seconds. Then the resistor is left in the room for 48 hours.	1%: ± (0.5% + 0.05Ω) 5%: ± (0.5% + 0.05Ω) Jumper: Max. 0.05Ω after test
RMEP Resistance to Solvent	JIS-C-5201-1 4.29	The tested resistor is immersed into isopropyl alcohol of 20~25°C for 60 seconds. Then the resistor is left in the room for 48 hours.	1% and below: ± (0.5% + 0.05Ω) 5%: ± (0.5% + 0.05Ω) Jumper: Max. 0.02Ω after test


# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

Performance Characteristics (cont.)			
Test	Test Method	Procedure	Requirements
RMEF Damp Heat with Load	JIS-C-5201-1 4.24 IEC-60115-1 4.24	40 ± 2°C, 90~95% R.H. RCWV or Max working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF".	1%: ± (1% + 0.05Ω) 5%: ± (2% + 0.05Ω) Jumper: Max. 0.1Ω after test
RMEP Damp Heat with Load	JIS-C-5201-1 4.24 IEC-60115-1 4.24	40 ± 2°C, 90~95% R.H. RCWV or Max working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF".	1% and below: ± (1% + 0.05Ω) 5%: ± (2% + 0.05Ω) Jumper: Max. 0.05Ω after test
RMEF Load Life (Endurance)	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1	70 ± 2°C, RCWV or Max working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF"	1%: ± (1% + 0.05Ω) 5%: ± (3% + 0.1Ω) Jumper: Max. 0.1Ω after test
RMEP Load Life (Endurance)	JIS-C-5201-1 4.25 IEC-60115-1 4.25.1	70 ± 2°C, RCWV or Max working voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF"	1% and below: ± (1% + 0.05Ω) 5%: ± (3% + 0.1Ω) Jumper: Max. 0.05Ω after test
Insulation Resistance	JIS-C-5201-1 4.6 IEC-60115-1 4.6	Apply 100 VDC for 1 minute.	≥ 10GΩ
RMEF Bending Strength	JIS-C-5201-1 4.33 IEC-60115-1 4.33	Bending once for 5 seconds D: 0402, 0603, 0805 = 5 mm 1206, 1210, 1812 = 3 mm 2010, 2512 = 2 mm	± (1% + 0.05Ω)

## Power Derating Curve:

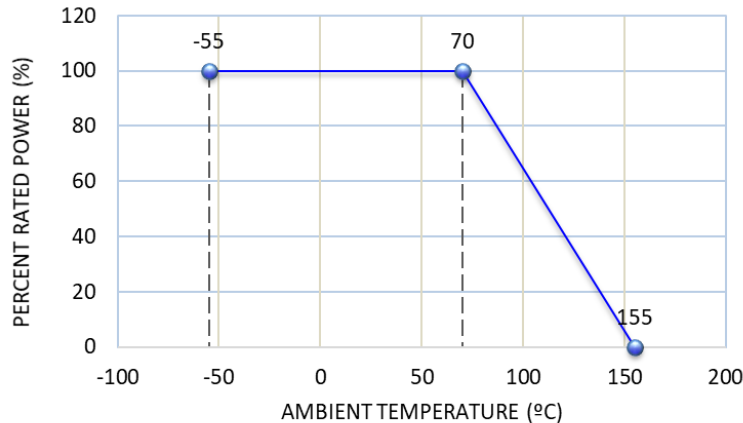

Power rating or current rating is in the case based on continuous full-load at ambient temperature of 70°C. For operation at ambient temperature in excess of 70°C, the load should be derated in accordance with figure of derating curve.

## Voltage Rating or Current Rating

Resistance range ≥ 1Ω

Rated Voltage: The resistor shall have a DC continuous working voltage of a RMS AC continuous working voltage at commercial line frequency and have form corresponding to the power rating, as determined formula as following:

$$E(RCWV) = \sqrt{P \times R}$$

E=Rated voltage (V)

P=Power rating (W)


R=Nominal resistance (Ω)

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption


Stackpole Electronics, Inc.  
Resistive Product Solutions

## Recommended Pad Layout



Size	A	B	C	Unit
0402	0.024	0.063	0.028	inches
	0.60	1.60	0.70	mm
0603	0.031	0.094	0.039	inches
	0.80	2.40	1.00	mm
0805	0.051	0.114	0.055	inches
	1.30	2.90	1.40	mm
1206	0.087	0.165	0.067	inches
	2.20	4.20	1.70	mm
1210	0.079	0.173	0.106	inches
	2.00	4.40	2.70	mm
1812	0.122	0.233	0.118	inches
	3.11	5.91	3.00	mm
2010	0.150	0.260	0.106	inches
	3.80	6.60	2.70	mm
2512	0.193	0.319	0.134	inches
	4.90	8.10	3.40	mm

## Recommended Solder Profile

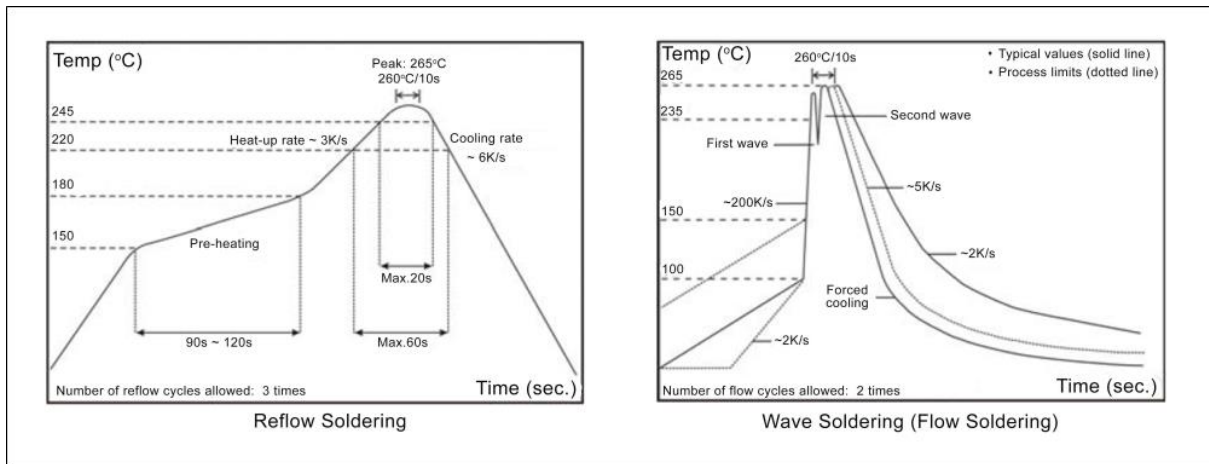

Rework temperature (hot air equipment): 350°C, 3~5 seconds

Recommended reflow methods: IR, vapor phase oven, hot air oven

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Repetitive Pulse Information

(This information is for reference only and is not guaranteed performance.)


If repetitive pulses are applied to resistors, pulse wave form must be less than “Pulse Limiting Voltage”, “Pulse Limiting Current” or “Pulse Limiting Wattage” calculated by the formula below.

$$V_p = K\sqrt{P \times R \times T / t}$$

$$I_p = K\sqrt{P / R \times T / t}$$

$$P_p = K^2 \times P \times T / t$$

Where:  $V_p$ : Pulse limiting voltage (V)  
 $I_p$ : Pulse limiting current (A)  
 $P_p$ : Pulse limiting wattage (W)  
 $P$ : Power rating (W)  
 $R$ : Nominal resistance (ohm)  
 $T$ : Repetitive period (sec)  
 $t$ : Pulse duration (sec)  
 $K$ : Coefficient by resistors type (refer to below matrix)  
 $[V_r$ : Rated Voltage (V),  $I_r$ : Rated Current (A)]

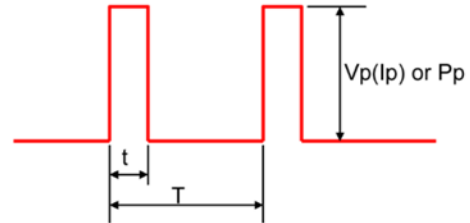

Note 1: If  $T > 10 \rightarrow T = 10$  (sec),  $T/t > 1000 \rightarrow T/t = 1000$

Note 2: If  $T > 10$  and  $T/t > 1000$ , “Pulse Limiting power (Single pulse) is applied

Note 3: If  $V_p < V_r$  ( $I_p < I_r$  or  $P_p < P$ ),  $V_r$  ( $I_r$ ,  $P$ ) is  $V_p$  ( $I_p$ ,  $P_p$ )

Note 4: Pulse limiting voltage (current, wattage) is applied at less than rated ambient temperature. If ambient temperature is more than the rated temperature (70°C), please decrease power rating according to “Power Derating Curve”

Note 5: Please assure sufficient margin for use period and conditions for “Pulse Limiting Voltage”


Note 6: If the pulse waveform is not square wave, please judge after transform the waveform into square wave according to the “Waveform Transformation to Square Wave”.

### Coefficient (K) Matrix


Ohmic Value	K
$R < 10\Omega$	0.50
$10\Omega \leq R < 100\Omega$	0.45
$100\Omega \leq R < 1K\Omega$	0.35
$1K\Omega \leq R < 10K\Omega$	0.25
$10K\Omega \leq R$	0.20

## Waveform Transformation to Square Wave


1. Discharge curve wave with time constant "t" → Square wave

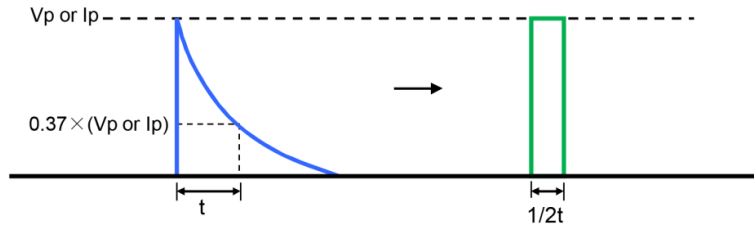


2. Damping oscillation wave with time constant of envelope "t" → Square wave

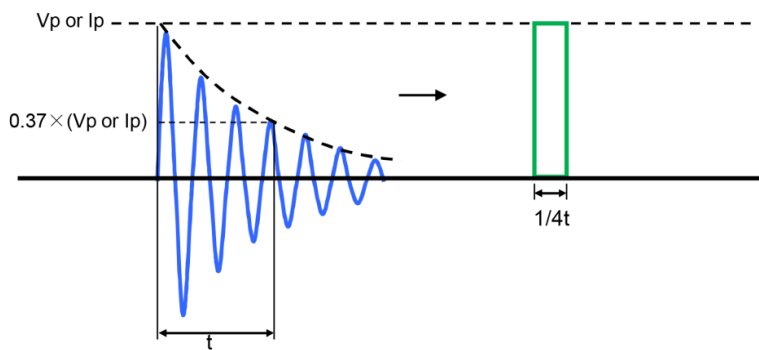


3. Half-wave rectification wave → Square wave

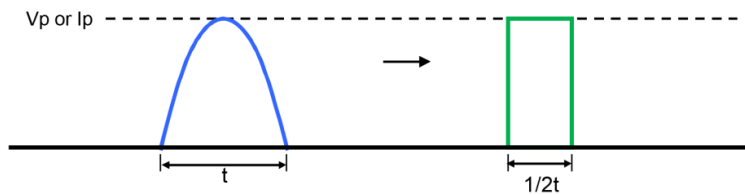

4. Triangular wave → Square wave

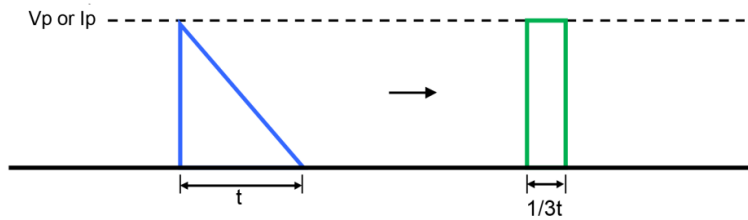


5. Special wave → Square wave

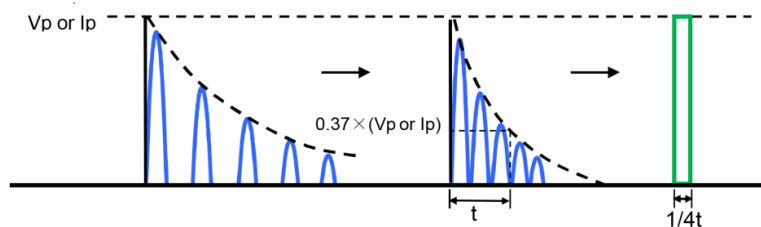

# RMEF / RMEP Series


General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

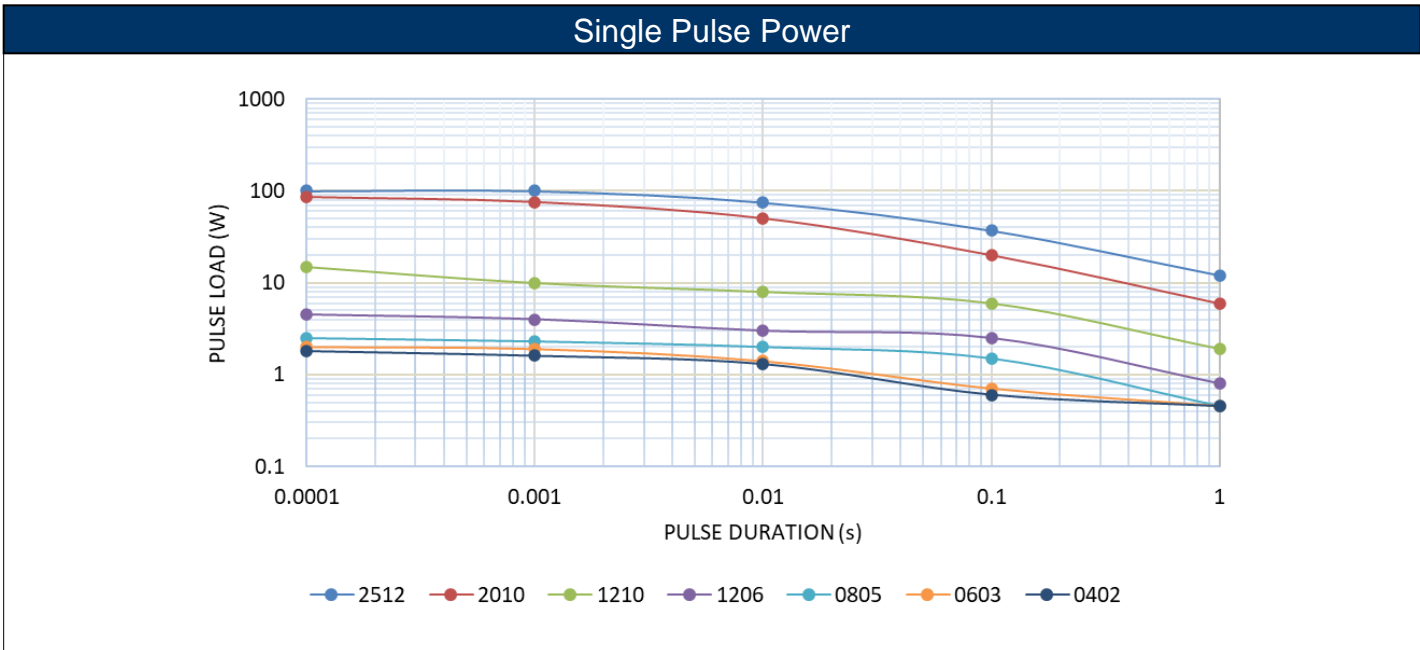

The data provided are for reference only. They are typical performance for this product but are not guaranteed. The actual pulse handling of each individual resistor may vary depending on a variety of factors including resistance tolerance and resistance value. Stackpole Electronics, Inc. assumes no liability for the use of this information. Customers should validate the performance of these products in their applications. Contact Stackpole marketing to discuss specific pulse application requirements.

## Reel Specifications

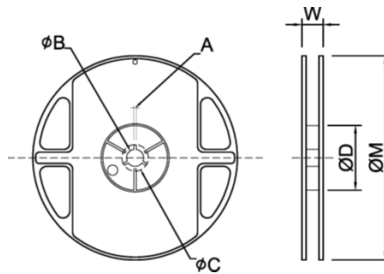

Type	Size(*)	A	ØB	ØC	ØD	W	ØM	Unit
0402	7" 10 K/Reel	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.453 ± 0.079	7.008 ± 0.079	inches
						11.50 ± 2.00		mm
0603, 0805, 1206, 1210	7" 5 K/Reel					0.453 ± 0.079		inches
						11.50 ± 2.00		mm
2010, 2512, 1812	7" 4 K/Reel					0.630 ± 0.079		inches
						16.00 ± 2.00		mm

(\*) Larger reel sizes may be available. Contact Stackpole Electronics.




# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.


Resistive Product Solutions

## Taping Specifications – Paper Tape

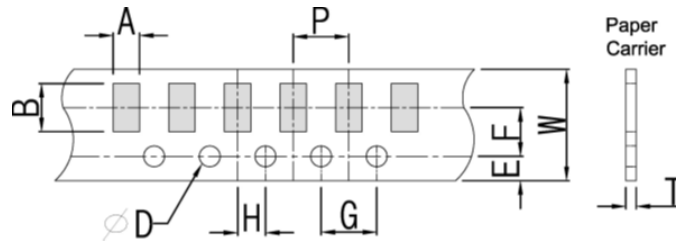

Size	A	B	W	E	F	Unit												
0402	0.028 ± 0.004	0.047 ± 0.004	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002	inches												
	0.70 ± 0.10	1.20 ± 0.10				mm												
0603	0.041 ± 0.008	0.071 ± 0.008			0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002	inches										
	1.05 ± 0.20	1.80 ± 0.20						mm										
0805	0.061 ± 0.008	0.091 ± 0.008					0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	3.50 ± 0.05	inches								
	1.55 ± 0.20	2.30 ± 0.20								mm								
1206	0.075 ± 0.008	0.138 ± 0.008							0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	3.50 ± 0.05	inches						
	1.90 ± 0.20	3.50 ± 0.20										mm						
1210	0.112 ± 0.008	0.138 ± 0.008									0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	3.50 ± 0.05	inches				
	2.85 ± 0.20	3.50 ± 0.20												mm				
Size	G	H	T	ØD									P	Unit				
0402	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.018 ± 0.004	0.059 +0.004/-0 1.50 +0.10/-0									0.079 ± 0.004	inches				
			0.45 ± 0.10		2.00 ± 0.10	mm												
0603			0.157 ± 0.004 4.00 ± 0.10		0.079 ± 0.002 2.00 ± 0.05	0.024 ± 0.004							0.059 +0.004/-0 1.50 +0.10/-0	0.157 ± 0.004	inches			
						0.60 ± 0.10	4.00 ± 0.10	mm										
0805						0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.030 ± 0.004						0.059 +0.004/-0 1.50 +0.10/-0	0.157 ± 0.004	inches		
								0.75 ± 0.10	4.00 ± 0.10	mm								
1206								0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.030 ± 0.004					0.059 +0.004/-0 1.50 +0.10/-0	0.157 ± 0.004	inches	
										0.75 ± 0.10	4.00 ± 0.10	mm						
1210										0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.030 ± 0.004				0.059 +0.004/-0 1.50 +0.10/-0	0.157 ± 0.004	inches
												0.75 ± 0.10						4.00 ± 0.10

## Taping Specifications – Plastic Tape

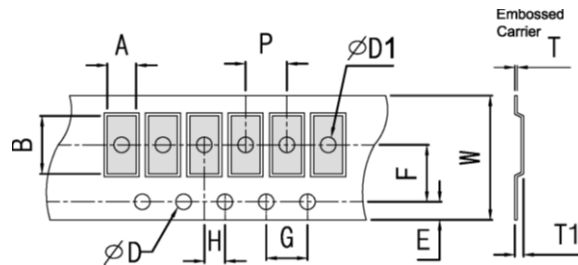

Size	A	B	W	E	F	G	Unit
2010	0.110 ± 0.008	0.220 ± 0.008	0.472 ± 0.004 12.00 ± 0.10	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	inches
	2.80 ± 0.20	5.60 ± 0.20					mm
2512	0.134 ± 0.008	0.264 ± 0.008					0.472 ± 0.004 12.00 ± 0.10
	3.40 ± 0.20	6.70 ± 0.20	mm				
1812	0.130 ± 0.008	0.181 ± 0.008	0.472 ± 0.004 12.00 ± 0.10	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	
	3.30 ± 0.20	4.60 ± 0.20					mm

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.  
Resistive Product Solutions

## Taping Specifications – Plastic Tape (cont.)


Size	H	T	ØD	ØD1	T1	P	Unit
2010	0.079 ± 0.002 2.00 ± 0.05	0.009 ± 0.004 0.23 ± 0.10	0.059 +0.004/-0 1.50 +0.10/-0	0.059 ± 0.004 1.50 ± 0.10	0.033 ± 0.006 0.85 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches
RMEF2512					0.033 ± 0.006 0.85 ± 0.15		mm
RMEP2512					0.037 ± 0.006 0.95 ± 0.15		inches
1812					0.033 ± 0.006 0.85 ± 0.15		mm

## Part Marking Instructions


### E96 and E24 Values for 0805-2512 (0.1%, 0.5% and 1% tolerances)

The nominal resistance is marked on the surface of the overcoating with the use of **four character markings**.

- Values <100Ω will use "R" as the decimal holder.



1.21Ω



100Ω


### E24 Values for 0805-2512 (5% and 10% tolerances)

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.

- Values between 1Ω and 9.1Ω will use "R" as the decimal holder.



1Ω




1.2 KΩ


### E24 Values for 0603 (5% and 10% tolerances)

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.

- Values between 1Ω and 9.1Ω will use "R" as the decimal holder.



1Ω




10Ω

### E96 Values for 0603 size (0.1%, 0.5% and 1% tolerances)

A two character number is assigned to each standard R-Value (E96) as shown in the chart below. This is followed by one alpha character which is used as a multiplier.

Each letter from "Y" - "F" represents a specific multiplier.



10.5Ω

Alpha Character = Multiplier		Chip Marking = Value	
Y = 0.1	C = 1000	01Y = 10.0 x 0.1 = 1Ω	
X = 1	D = 10000	01B = 10.0 x 100 = 1KΩ	
A = 10	E = 100000	25C = 17.8 x 1000 = 17.8KΩ	
B = 100	F = 1000000	01F = 10.0 x 100000 = 10MΩ	

### E96

#	R-Value	#	R-Value	#	R-Value	#	R-Value	#	R-Value	#	R-Value
01	10.0	17	14.7	33	21.5	49	31.6	65	46.4	81	68.1
02	10.2	18	15.0	34	22.1	50	32.4	66	47.5	82	69.8
03	10.5	19	15.4	35	22.6	51	33.2	67	48.7	83	71.5
04	10.7	20	15.8	36	23.2	52	34.0	68	49.9	84	73.2
05	11.0	21	16.2	37	23.7	53	34.8	69	51.1	85	75.0
06	11.3	22	16.5	38	24.3	54	35.7	70	52.3	86	76.8
07	11.5	23	16.9	39	24.9	55	36.5	71	53.6	87	78.7
08	11.8	24	17.4	40	25.5	56	37.4	72	54.9	88	80.6
09	12.1	25	17.8	41	26.1	57	38.3	73	56.2	89	82.5
10	12.4	26	18.2	42	26.7	58	39.2	74	57.6	90	84.5
11	12.7	27	18.7	43	27.4	59	40.2	75	59.0	91	86.6
12	13.0	28	19.1	44	28.0	60	41.2	76	60.4	92	88.7
13	13.3	29	19.6	45	28.7	61	42.2	77	61.9	93	90.9
14	13.7	30	20.0	46	29.4	62	43.2	78	63.4	94	93.1
15	14.0	31	20.5	47	30.1	63	44.2	79	64.9	95	95.3
16	14.3	32	21.0	48	30.9	64	45.3	80	66.5	96	97.6

Note: 0402 resistors are not marked.

## RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
RMEF	General Purpose Thick Film Surface Mount Chip Resistor 100% Lead Free	SMD	YES	100% Matte Sn over Ni	Always	Always
RMEP	Thick Film High Power Surface Mount Chip Resistor 100% Lead Free	SMD	YES	100% Matte Sn over Ni	Always	Always

## “Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

## Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

## Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

# RMEF / RMEP Series

General Purpose and High Power Thick Film Chip Resistor  
100% RoHS Compliant Without Exemption

Stackpole Electronics, Inc.

Resistive Product Solutions

## How to Order - RMEF

R	M	E	F	0	6	0	3	J	T	1	0	R	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---

Product Series		Size		Tolerance			Packaging (*)				Resistance Value
Code	Description	Size	W	Code	Tol	Value	Code	Description	Size	Quantity	
RMEF	Thick Film Chip Resistor	0402	0.063	F	1%	E96, E24	T	7" Reel Paper Tape	0402	10000	Four characters with the multiplier used as the decimal holder. 1 ohm = 1R00 10 ohm = 10R0 100 Kohm = 100K 1 Mohm = 1M00 Zero ohm jumper = 0R00
		0603	0.1	J	5%	E24			0603, 0805 1206, 1210	5000	
		0805	0.125	Z	Jumper		7" Reel Plastic Tape	2010, 2512	4000		
		1206	0.25			1812					
		1210	0.5								
		1812	0.75								
		2010	0.75								
		2512	1								

(\*) Larger reel sizes may be available.  
Contact Stackpole Electronics.

## How to Order - RMEP

R	M	E	P	0	6	0	3	J	T	1	0	R	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---

Product Series		Size		Tolerance			Packaging (*)				Resistance Value
Code	Description	Size	W	Code	Tol	Value	Code	Description	Size	Quantity	
RMEP	Thick Film High Power	0402	0.1	B	0.1%	E96, E24	T	7" Reel Paper Tape	0402	10000	Four characters with the multiplier used as the decimal holder. 1 ohm = 1R00 10 ohm = 10R0 100 Kohm = 100K 1 Mohm = 1M00 Zero ohm jumper = 0R00
		0603	0.125	D	0.5%				0603, 0805 1206, 1210	5000	
		0805	0.25	F	1%	E24	7" Reel Plastic Tape	2010, 2512	4000		
		1206	0.5	J	5%			1812			
		1210	0.66	K	10%						
		1812	1	Z	Jumper						
		2010	1								
		2512	2								

(\*) Larger reel sizes may be available.  
Contact Stackpole Electronics.