

DATA SHEET

CEMENT RESISTORS

Low Ohmic, Metal Plate

Vertical Mount


SLR Series

$\pm 5\%$, $\pm 10\%$

2W to 10W

RoHS compliant & Halogen Free





APPLICATIONS

- Home appliance
- Consumer

FEATURES

- Ultra miniature size
- Current detecting resistors
- Flameproof cement case
- RoHS compliant and halogen free

ORDERING INFORMATION

Part number of the cement resistor is identified by the series, power rating, tolerance, packing, temperature coefficient, resistance value and type code.

PART NUMBER

<u>SLR</u>	<u>500</u>	<u>J</u>	<u>B</u>	<u>-</u>	<u>0R035</u>	<u>U</u>
(1)	(2)	(3)	(4)	(5)	(6)	(7)

(1) SERIES

SLR Series

(2) POWER RATING

200 = 2W

700 = 7W

300 = 3W

10A = 10W

500 = 5W

(3) TOLERANCE

J = $\pm 5\%$

K = $\pm 10\%$

(4) PACKAGING

B = Bulk

(5) TEMPERATURE COEFFICIENT OF RESISTANCE

- = Based on spec.

(6) RESISTANCE VALUE

Example:

0R035 = 0.035 Ω , 0R1 = 0.1 Ω , 1R = 1 Ω

(7) TYPE CODE

Optional code for different type. .

Example:

Null = Standard type

E = SLR200 & SLR300 / $\varphi d=0.8\pm 0.05\text{mm}$ copper wire


U = SLR500 & SLR700 & SLR10A / $\varphi d=0.6\pm 0.05\text{mm}$ copper wire

C = SLR200 & SLR300 / $\varphi d=0.8\pm 0.05\text{mm}$ CP- wire


W = SLR500 & SLR700 & SLR10A / $\varphi d=0.6\pm 0.05\text{mm}$ CP- wire

DIMENSIONS


Unit: mm

	Normal	A	B	C	D	ψd	RM
	SLR200	8±1	13±1	3.5±1	5±1	0.60±0.05	9±1
	SLR300	13±1	13±1	3.5±1	5±1	0.60±0.05	9±1
	SLR500	18±1	14±1	3.5±1	5±1	0.80±0.05	10±1
	SLR700	18±1	26±1	3.5±1	5±1	0.80±0.05	20±1
	SLR10A	20±1	26±1	3.5±1	5±1	0.80±0.05	20±1

DERATING CURVE

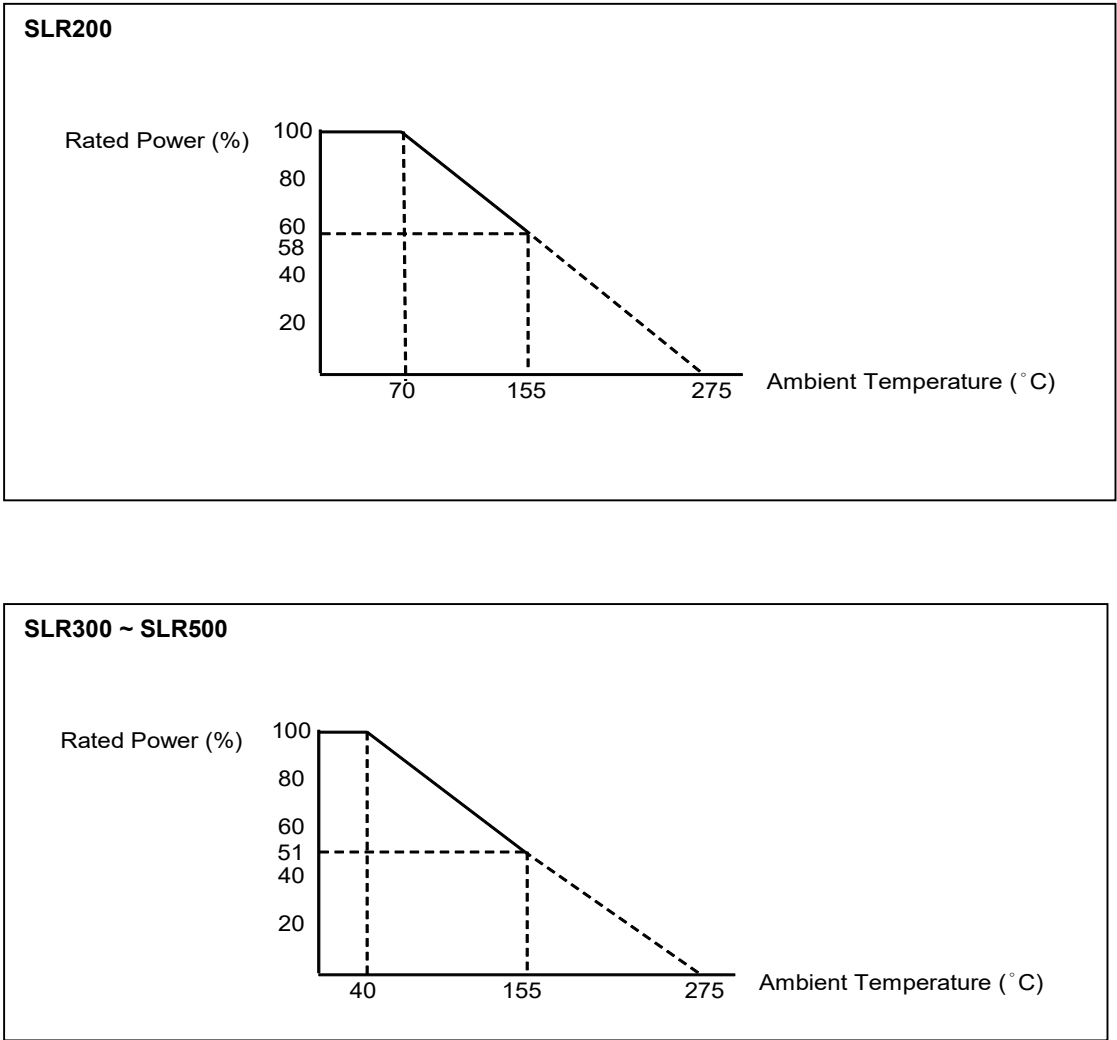

TEMPERATURE CURVE

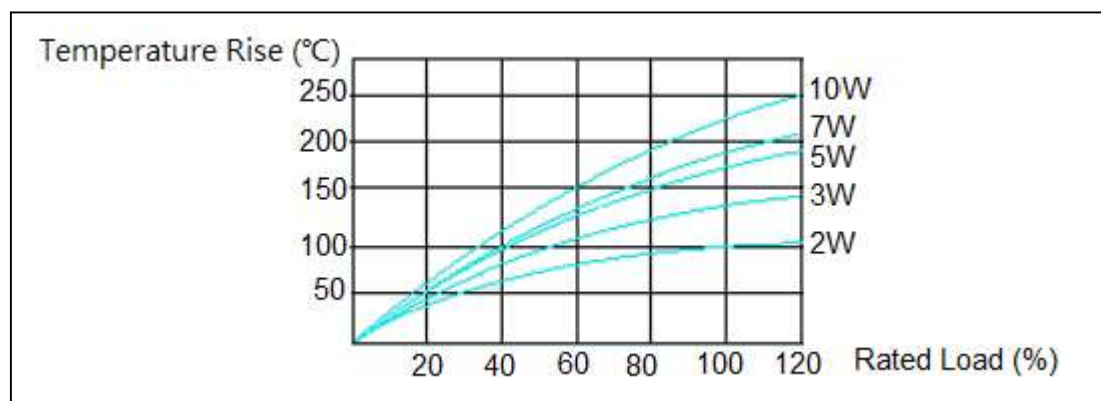

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SLR200	SLR300	SLR500	SLR700	SLR10A
Power Rating at 70 °C	2W				
Power Rating at 40 °C		3W	5W	7W	10W
Voltage Proof on Insulation	500V	700V	700V	1000V	1000V
Resistance Range	0.1Ω ~ 0.68Ω	0.01Ω ~ 1Ω	0.01Ω ~ 3.3Ω	0.01Ω ~ 3.3Ω	0.01Ω ~ 3.3Ω
Maximum Working Voltage	$\sqrt{P \times R}$				
Operating Temp. Range	- 55°C to +155°C				
Temperature Coefficient	±250ppm/°C				

Note: For resistance value out of above range is by request.

TABLE I MATERIALS OF LEAD WIRE

TYPE	Resistance Value	
SLR Series	≤0.05Ω	>0.05Ω
	Copper Wire	CP Wire

TEST AND REQUIREMENTS

TEST	TEST METHOD	PROCEDURE	APPRAISE
Short Time Overload	IEC 60115-1 4.13	2.5 times RCWV for 5 sec.(Not more than maximum overload voltage)	±2.0%+0.05Ω
Voltage Proof on Insulation	IEC 60115-1 4.7	In V-Block for 60 sec. test voltage as above table	No Breakdown
Temperature Coefficient	IEC 60115-1 4.8	Between -55°C to +155°C	By Type
Insulation Resistance	IEC 60115-1 4.6	In V-Block for 60 sec.	>1,000MΩ
Solderability	IEC 60115-1 4.17	245±5°C for 3±0.5 Sec.	95% Min. coverage
Solvent Resistance of Marking	IEC 60115-1 4.30	IPA for 5±0.5 Min. with ultrasonic	No deterioration of coatings and markings
Robustness of Terminations	IEC 60115-1 4.16	Direct load for 10 Sec. in the direction of the terminal leads	≥2.5Kg(24.5N)D
Periodic-pulse Overload	IEC 60115-1 4.39	4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec.off)	±2.0%+0.05Ω
Damp Heat Steady State	IEC 60115-1 4.24	40±2°C,90-95% RH for 56 days, loaded with 0.1 times RCWV	±5.0%+0.05Ω
Endurance at 70°C	IEC 60115-1 4.25	70±2°C at RCWV(or Umax., whichever less) for 1,000 Hr.(1.5 Hr.on,0.5 Hr. off)	±5.0%+0.05Ω
Temperature Cycling	IEC 60115-1 4.19	➔ -55°C ➔ Room Temp. ➔ +155°C Room Temp.(5 cycles)	±2.0%+0.05Ω
Resistance to Soldering Heat	IEC 60115-1 4.18	260±3°C for 10±1 Sec., immersed to a point 3±0.5mm from the body	±1.0%+0.05Ω

Note:

RCWV (Rated Continuous Working Voltage):

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V=\sqrt{(P \times R)}$$

or max. working voltage whichever is less

Where


V=Continuous rated DC or

AC (rms) working voltage (V)

P=Rated power (W)

R=Resistance value (Ω)

MARKING



Example:

YAGEO	= Brand
1210	= Date code
3W	= Power rating
0R18	= Resistance
K	= Tolerance

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 1	Aug.31, 2023	-	- Revised LEGAL DISCLAIMER
Version 0	Aug.2, 2021	-	- First issue of this specification

“ Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itse lf are unchanged. Any product change will be announced by PCN.”

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.