
MPT100T2R2J V ACTIVE

CGS | CGS MPT

TE Internal #: 2176429-9 Power Resistor, Thick Film, TO247, 100 W, 2.2 Ω, 5 %, ±100 ppm/° C, Radial-Leaded, Copper Termination, 15.75 x 20.7 x 4.95 mm, Tube, CGS MPT

View on TE.com >

Passive Components > Resistors > Through-Hole Resistors

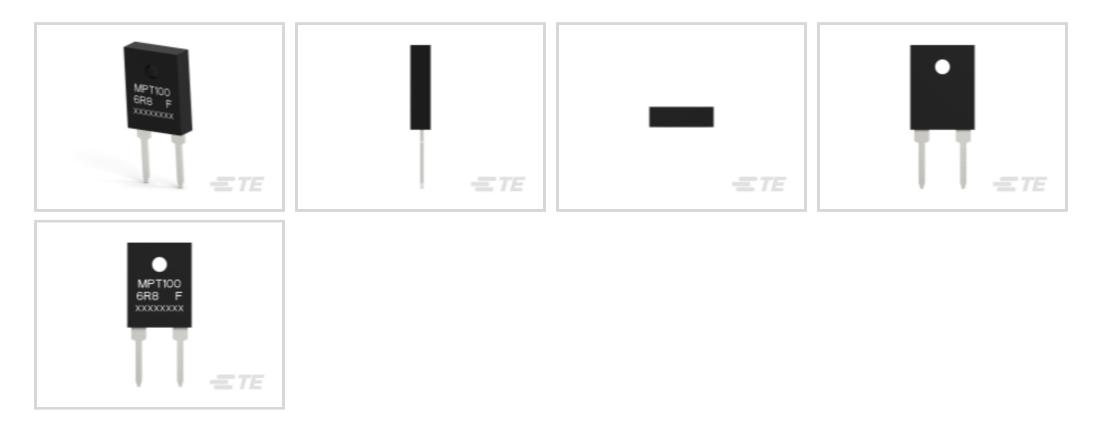

Resistor Type: Power Resistor Element Type: Thick Film

Package Size Code: TO247

Power Rating: 100 W

Resistance Class: Up to 1kΩ

Features

TE connectivity

Product Type Features

Resistor Type	Power Resistor
Element Type	Thick Film
Package Size Code	TO247
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Operating Voltage	700 V
Power Rating	100 W
Resistance Class	Up to 1kΩ
Resistance Value	2.2 Ω
Passive Component Tolerance	5 %
Body Features	
Lead Type	Radial-Leaded

MPT100T2R2J

Power Resistor, Thick Film, TO247, 100 W, 2.2 Ω, 5 %, ±100 ppm/°C, Radial-Leaded, Copper Termination, 15.75 x 20.7 x 4.95 mm, Tube, CGS MPT



Termination Features

Termination Area Base Material	Copper
Number of Terminations	2
Dimensions	
Passive Component Dimensions	15.75 x 20.7 x 4.95 mm
Usage Conditions	
Temperature Coefficient	±100 ppm/°C
Packaging Features	
Packaging Method	Tube
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE

2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


MPT100T2R2J

Power Resistor, Thick Film, TO247, 100 W, 2.2 Ω, 5 %, ±100 ppm/°C, Radial-Leaded, Copper Termination, 15.75 x 20.7 x 4.95 mm, Tube, CGS MPT





Also in the Series | CGS MPT



Customers Also Bought





Documents

Product Drawings MPT100 2R2 5%

English

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_2176429-9_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2176429-9_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2176429-9_BA.3d_stp.zip

C For support call +1 800 522 6752

MPT100T2R2J

Power Resistor, Thick Film, TO247, 100 W, 2.2 Ω, 5 %, ±100 ppm/°C, Radial-Leaded, Copper Termination, 15.75 x 20.7 x 4.95 mm, Tube, CGS MPT



English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages MPT-0518

English