


SMD Power Inductors (NR series)

NR4010T2R2N

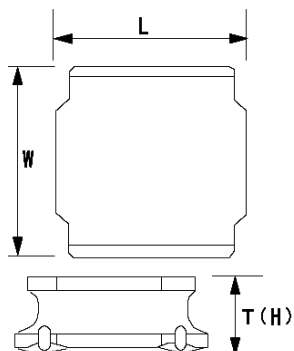

■ Features

- Item Summary
2.2 μ H($\pm$ 30%), 1150mA, 890mA
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 5000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	~/4010
Inductance	2.2 μ H($\pm$ 30%)
Inductance Measuring Frequency	100kHz
Rated Current -Saturation Current	1150mA
Rated Current -Temperature Rise Current	890mA
DC Resistance (max)	0.18 Ω
Avg. of DC.Resistance	0.15 Ω
Temperature Range	-25°C to 120°C
Self-resonant Frequency (min)	73MHz
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	4mm $\pm$ 0.2
W	4mm $\pm$ 0.2
H	1mm max

2013.02.24

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.